
Quick Start Guide
Quantum Photonics Bundle
QPB-1C1L



1 About This Guide

This guide provides the essential steps required to install and commission the FLIM LABS Quantum Photonics Bundle.

It does **not** replace the Quantum Photonics Bundle User Manual, the manuals supplied with the individual FLIM LABS components, or the documentation for any connected third-party equipment.

The complete Quantum Photonics Bundle User Manual is available at:

https://www.flimlabs.com/products/quantum-photonics-bundle

Scan the QR code to access the full manual.

Warning Read the full User Manual, all supplied FLIM LABS component manuals, and the documentation of any connected third-party equipment before installation and operation.

2 Safety Information

This bundle integrates a pulsed laser source, single-photon detector, high-resolution timing electronics, and data acquisition hardware.

Safe operation requires compliance with:

- FLIM LABS laser safety instructions
- FLIM LABS SPAD detector manual
- FELIX Time-to-Digital Converter documentation
- TEDIEL software documentation
- Local laboratory safety procedures

Warning Never look into optical fibers, beam paths, or laser outputs.

3 Scope of Delivery

The bundle is shipped with the following components:

- FLIM LABS pulsed laser
- FLIM LABS SPAD detector
- FELIX Time-to-Digital Converter
- Optical fibers
- USB cables and power supplies
- Product documentation

Verify that all components of the ordered configuration are present and undamaged before installation.

4 Hardware Installation

Figure 1 shows the complete system connection diagram.

1. Install all components on stable surfaces with sufficient space for ventilation, operation, and cable routing.
2. Connect the pulsed laser source to the experimental setup using the supplied single-mode optical fiber.
3. Connect the fluorescence or photon collection path to the SPAD detector using the supplied multimode optical fiber.
4. Connect the detector output to the detector input of the FELIX Time-to-Digital Converter.
5. Connect the *Sync-OUT* port of the laser to the synchronization input of the FELIX Time-to-Digital Converter.
6. Connect the FELIX Time-to-Digital Converter to the acquisition computer using the supplied USB cable.
7. Connect the required power supplies to all devices.
8. Verify all optical, electrical, USB, and power connections before applying power.

5 Software Configuration

Download and install the latest version of the TEDIEL software suite according to the supplied documentation.

After completing the hardware installation:

1. Power on all hardware components.
2. Start the TEDIEL software.
3. Verify that the FELIX Time-to-Digital Converter is detected.
4. Verify that detector and synchronization signals are present.
5. Configure the acquisition settings for the intended experiment.
6. Save the configuration.

For detailed software instructions, refer to the TEDIEL software documentation.

6 First Measurement

1. Prepare the optical setup or experiment.
2. Start data acquisition in the TEDIEL software.
3. Verify that photon events are detected.
4. Acquire a test measurement.
5. Adjust the acquisition parameters as required.
6. Save or export the acquired data.

7 Product Label

Quantum Photonics Bundle

P/N: QPB-1C1L
S/N: QPB-XXXX-XXX

MADE IN ITALY - **FLIM LABS S.r.l.**
Via della Farnesina 3 - 00135 Rome
techsupport@flimlabs.com

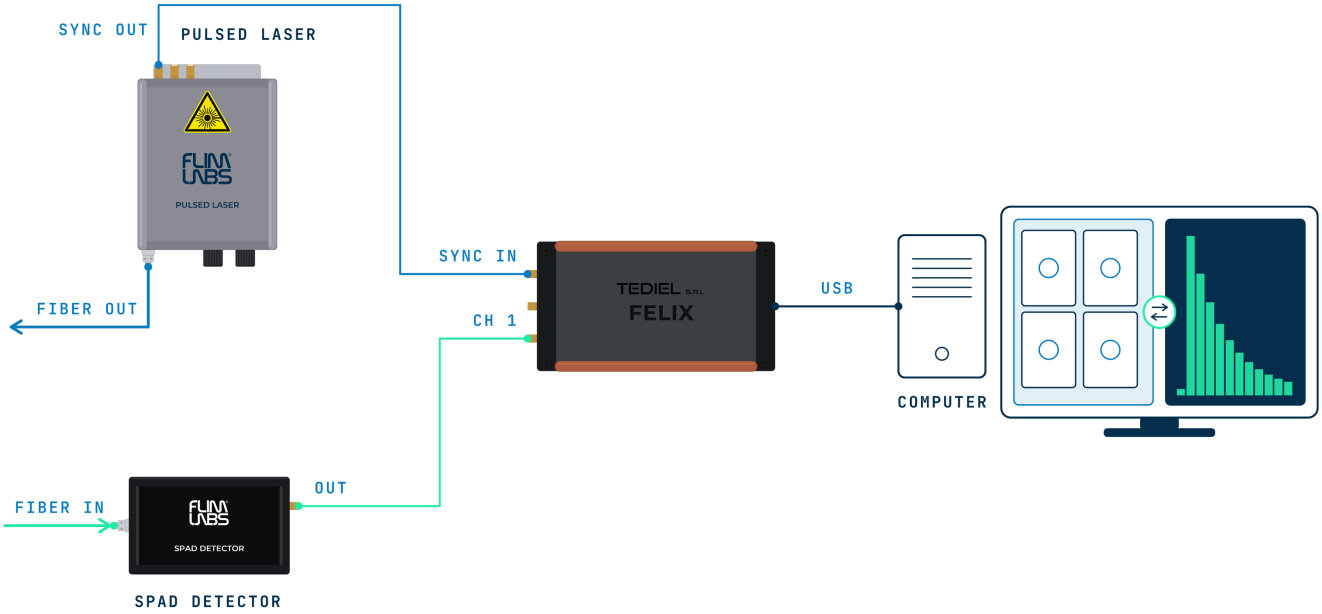


Figure 1: System connection overview.