Orion star clip (January)


7 red LEDs charlieplexed on PA2 / PA6 / PA7 / PA1, one 100R per line.

Betelgeuse D1  Bellatrix D2  Alnitak D3  Alnilam D4  Mintaka D5  Saiph D6  Rigel D7

PA0 (pin 6) is UPDI: leave it alone in firmware and nothing on the board loads it.

TP1–TP3 are pogo pads: UPDI, GND, VBAT. Remove the cell before powering from the programmer.

SW1 on PA3 (pin 7, internal pull-up): short press = next mode, hold 1 s = off (power-down sleep), any press wakes it.

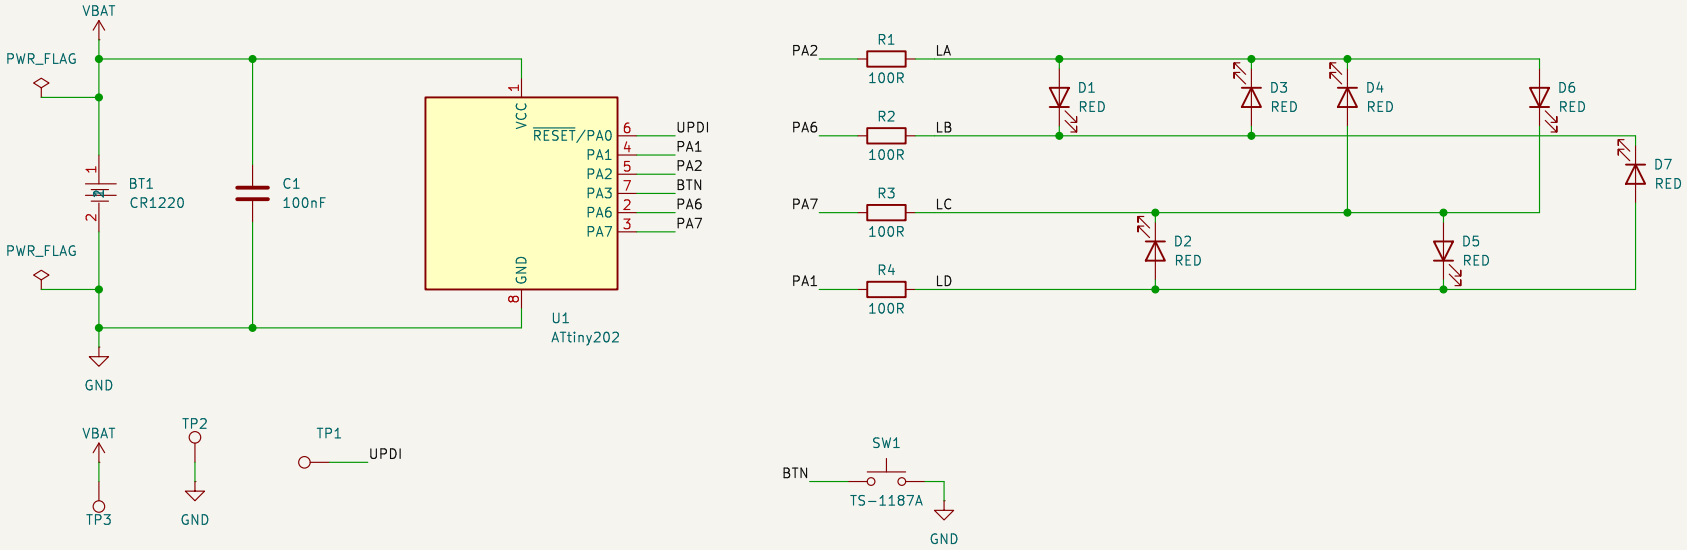


Charlieplexed 7-LED Orion on an ATtiny202, CR1220 powered

Sheet: /
File: star_clip.kicad_sch

**Title: Orion star clip**

Size: A4 | Date: | **Rev:**
KiCad E.D.A. 9.0.8 | Id: 1/1