


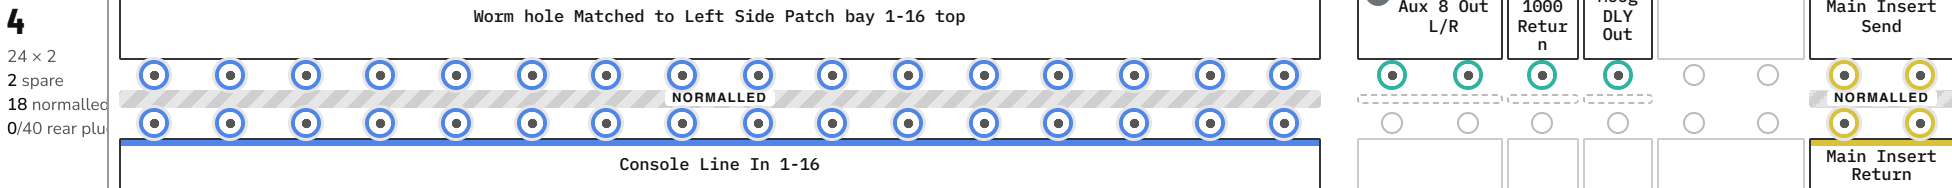
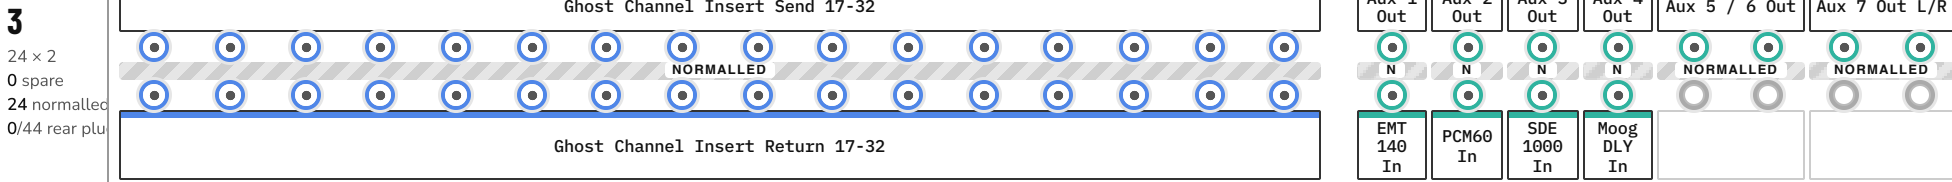


# STUDIO CARQUINEZ PATCH BAY

Front view, top of rack first. Left 16 ports: console buckets. Right 8: outboard, FX, monitoring. Generated 2026-09-28 from `config.py`.

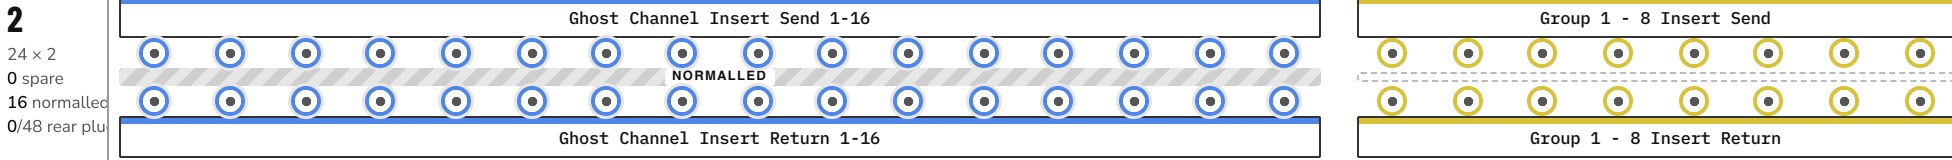


## MAIN RACK

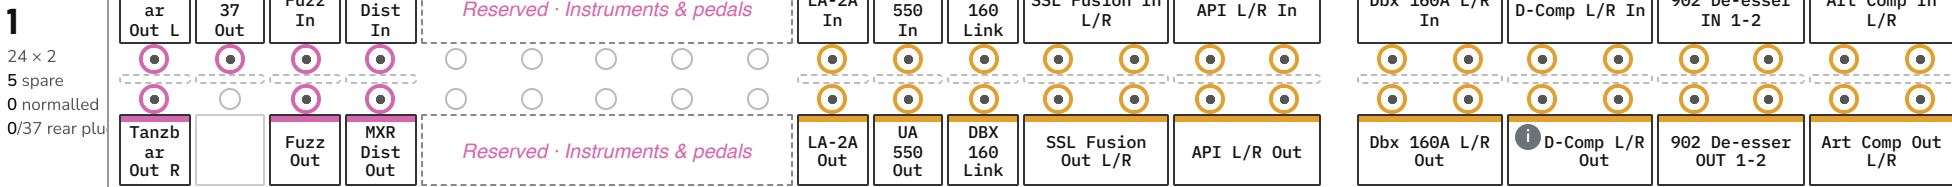



5

24 x 2  
8 spare  
16 normalled  
0/32 rear plu

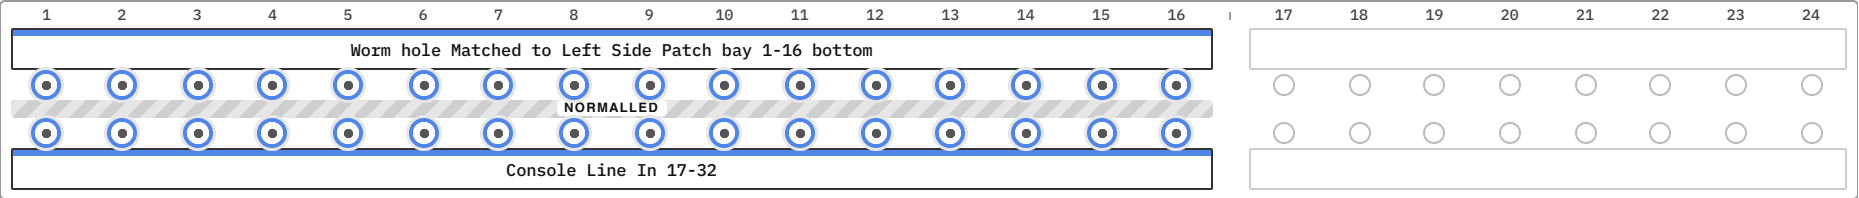



6

24 x 2  
0 spare  
16 normalled  
0/48 rear plu

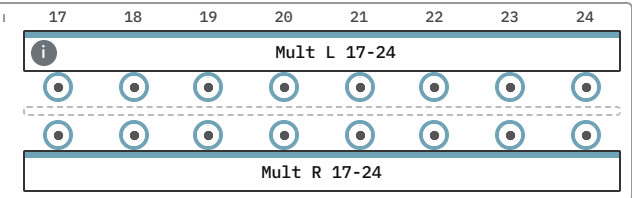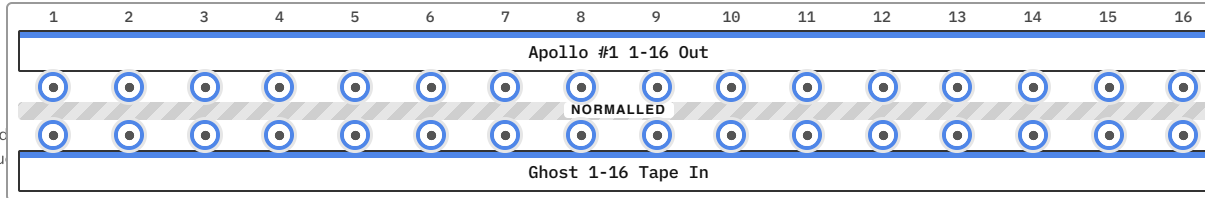



7

24 x 2  
0 spare  
20 normalled  
0/44 rear plu

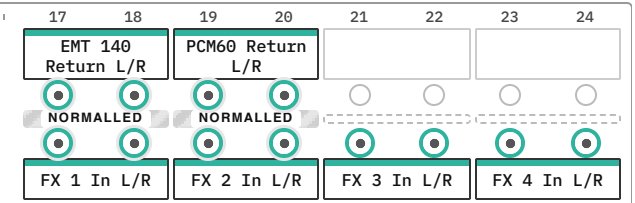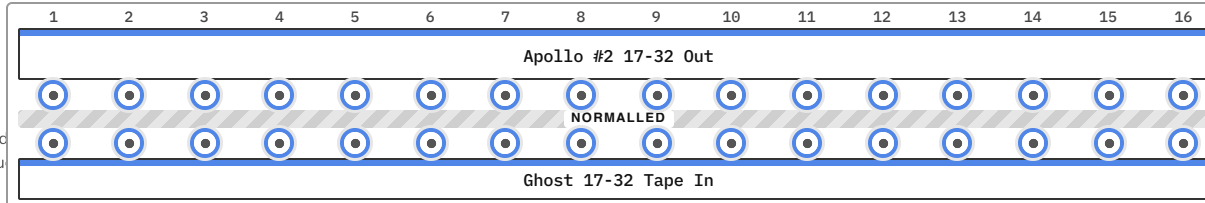



8

24 x 2  
0 spare  
24 normalled  
0/47 rear plu

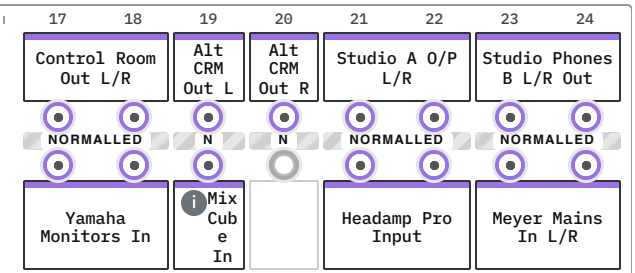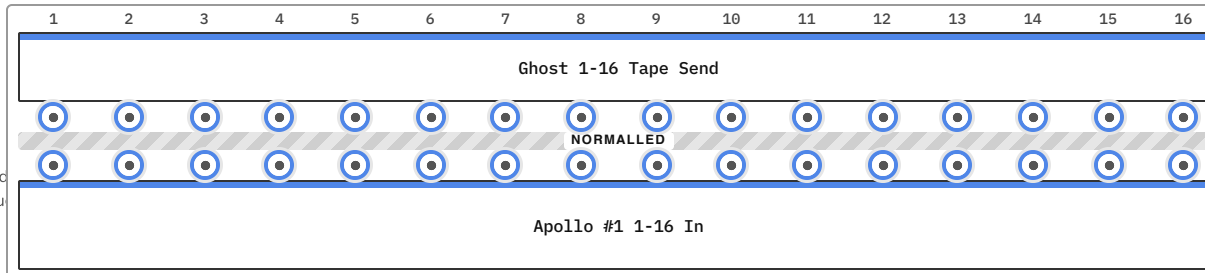



9

24 x 2  
0 spare  
20 normalled  
0/44 rear plu

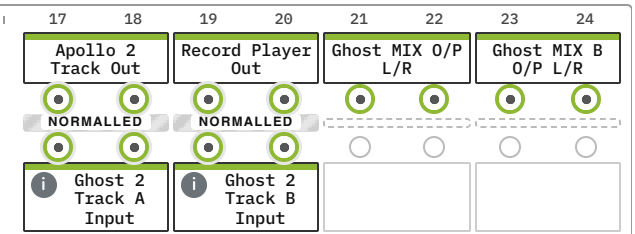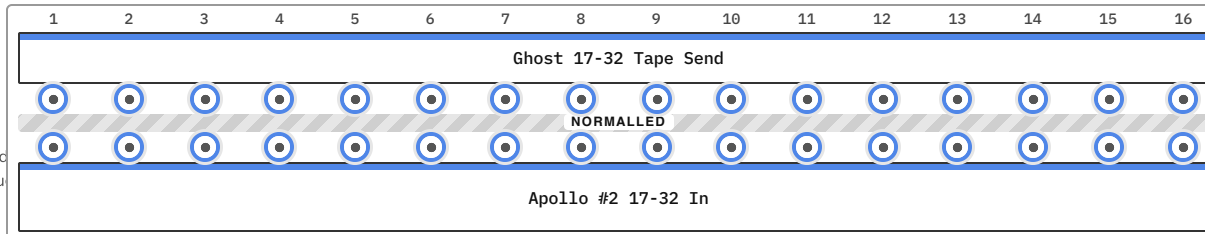


10


24 x 2  
3 spare  
0 normalled  
0/42 rear plu

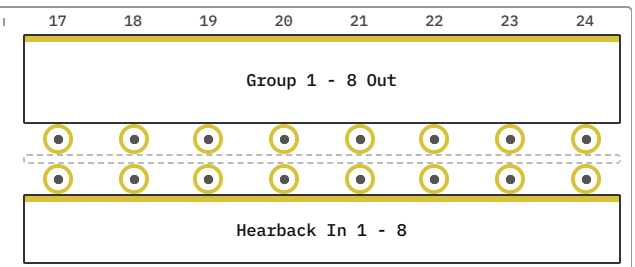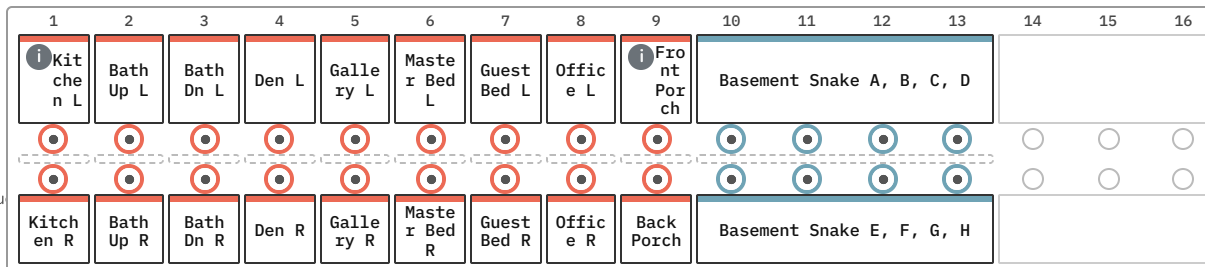


24 x 2  
16 spare  
8 normalled  
0/16 rear plu

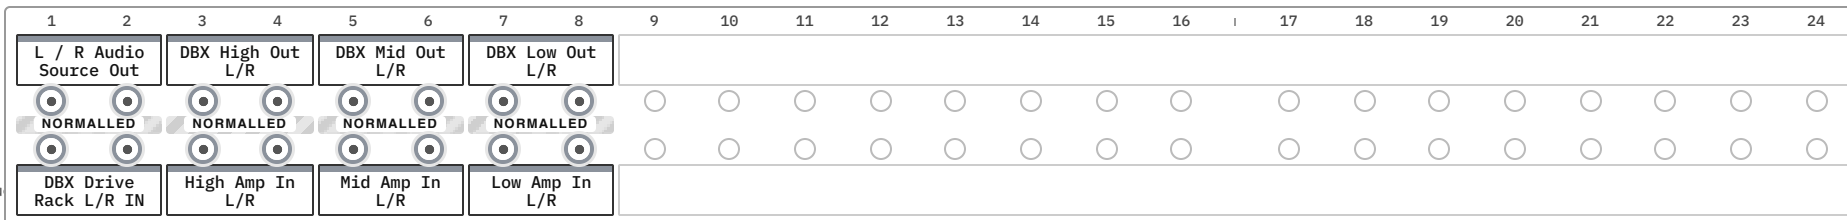


Single row  
3 spare  
0/17 rear plu

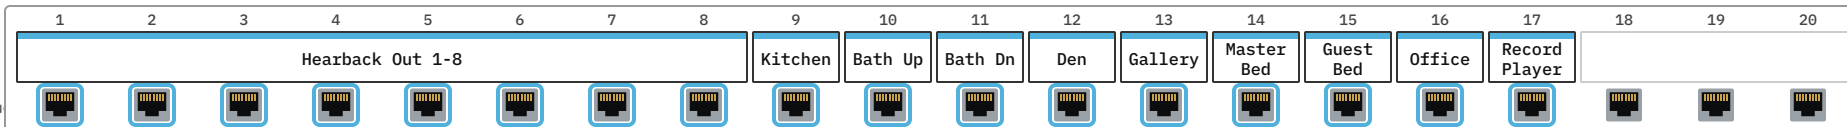

Not in use  
Single row  
22 spare  
0/0 rear plug

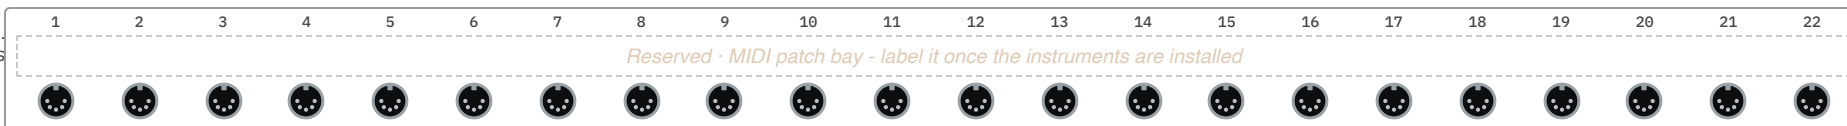

Single row  
1 spare  
0/9 rear plug

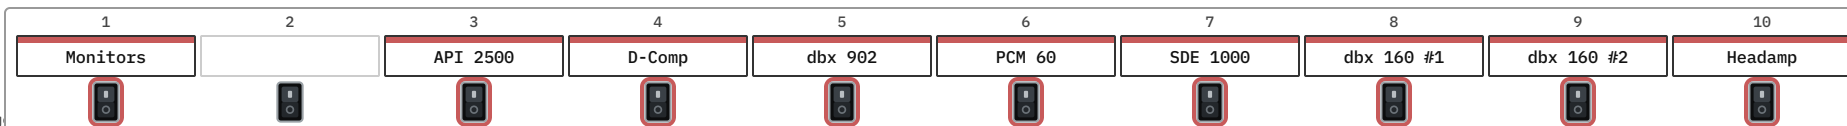

RACK 1 · EQUIPMENT (20U)

|        |                                                                   |                                                          |
|--------|-------------------------------------------------------------------|----------------------------------------------------------|
| U1     | POWER CONDITIONER                                                 |                                                          |
| U2     | SWITCH PANEL                                                      | Not on the patch bay                                     |
| U3     | APOLLO 16 #1 <span>Replacing both Apollos with one 1U unit</span> | Patch bay: Bay 6 · 1–16, Bay 8 · 1–16                    |
| U4     | APOLLO 16 #2 <span>Replacing both Apollos with one 1U unit</span> | Patch bay: Bay 7 · 1–16, Bay 9 · 1–16                    |
| U5     | API 2500 COMPRESSOR                                               | Patch bay: Bay 1 · 15–16, Power Switches · 3             |
| U6–7   | D-COMP                                                            | Patch bay: Bay 1 · 19–20, Power Switches · 4             |
| U8     | DBX 902 DE-ESSER ×2                                               | Patch bay: Bay 1 · 21–22, Power Switches · 5             |
| U9     | LEXICON PCM 60 REVERB                                             | Patch bay: Bay 3 · 18, Bay 7 · 19–20, Power Switches · 6 |
| U10    | SDE 1000 DELAY                                                    | Patch bay: Bay 3 · 19, Bay 4 · 19, Power Switches · 7    |
| U11–12 | DBX 160 COMPRESSORS                                               | Patch bay: Bay 1 · 12, 17–18, Power Switches · 8–9       |
| U13    | EMT REVERB REMOTE <span>Could move</span>                         |                                                          |
| U14    | HEADPHONE AMP <span>Could move</span>                             | Patch bay: Bay 8 · 21–22                                 |
| U15    | HEADPHONE POWER SUPPLY                                            |                                                          |
| U16    | MIDI PATCH BAY                                                    | Patch bay: <u>Midi</u> · 1–22                            |
| U17    | HEARBACK UNIT                                                     | Patch bay: Bay 10 · 17–24, Ethernet · 1–8                |
| U18    | ETHERNET PATCH BAY                                                | Patch bay: <u>Ethernet</u> · 1–20                        |
| U19–20 | SOUNDCRAFT GHOST POWER SUPPLY                                     |                                                          |

OPEN QUESTIONS

# CABLE PULLS TO EACH ROOM

Two XLR sends, one XLR return and one Cat5 per room. Each cable: pull it, terminate both ends onto their connectors, then patch it in at the room plate and at the console - **182** tasks in all. A dash means there is nothing to patch there: the returns live in a floor loom and the deck speaker runs never touch a bay.

KITCHEN

| PULLED | TERMINATED               |                          | PATCHED                  |                          |
|--------|--------------------------|--------------------------|--------------------------|--------------------------|
|        | ROOM                     | CONSOLE                  | ROOM                     | CONSOLE                  |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | —                        |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Notes...

BATH UP

| PULLED | TERMINATED               |                          | PATCHED                  |                          |
|--------|--------------------------|--------------------------|--------------------------|--------------------------|
|        | ROOM                     | CONSOLE                  | ROOM                     | CONSOLE                  |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | —                        |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Notes...

BATH DN

| PULLED | TERMINATED               |                          | PATCHED                  |                          |
|--------|--------------------------|--------------------------|--------------------------|--------------------------|
|        | ROOM                     | CONSOLE                  | ROOM                     | CONSOLE                  |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | —                        |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Notes...

DEN

| PULLED | TERMINATED               |                          | PATCHED                  |                          |
|--------|--------------------------|--------------------------|--------------------------|--------------------------|
|        | ROOM                     | CONSOLE                  | ROOM                     | CONSOLE                  |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | —                        |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Notes...

GALLERY

| PULLED | TERMINATED               |                          | PATCHED                  |                          |
|--------|--------------------------|--------------------------|--------------------------|--------------------------|
|        | ROOM                     | CONSOLE                  | ROOM                     | CONSOLE                  |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | —                        |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Notes...

MASTER BED

| PULLED | TERMINATED               |                          | PATCHED                  |                          |
|--------|--------------------------|--------------------------|--------------------------|--------------------------|
|        | ROOM                     | CONSOLE                  | ROOM                     | CONSOLE                  |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | —                        |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Notes...

GUEST BED

| PULLED | TERMINATED               |                          | PATCHED                  |                          |
|--------|--------------------------|--------------------------|--------------------------|--------------------------|
|        | ROOM                     | CONSOLE                  | ROOM                     | CONSOLE                  |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | —                        |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Notes...

OFFICE

| PULLED | TERMINATED               |                          | PATCHED                  |                          |
|--------|--------------------------|--------------------------|--------------------------|--------------------------|
|        | ROOM                     | CONSOLE                  | ROOM                     | CONSOLE                  |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | —                        |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Notes...

RECORD PLAYER

| PULLED | TERMINATED               |                          | PATCHED                  |                          |
|--------|--------------------------|--------------------------|--------------------------|--------------------------|
|        | ROOM                     | CONSOLE                  | ROOM                     | CONSOLE                  |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | —                        |
|        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Notes...

FRONT DECK

| PULLED                          | TERMINATED               |                          | PATCHED |         |
|---------------------------------|--------------------------|--------------------------|---------|---------|
|                                 | ROOM                     | CONSOLE                  | ROOM    | CONSOLE |
| SP <input type="checkbox"/> KER | <input type="checkbox"/> | <input type="checkbox"/> | —       | —       |

Notes...

BACK DECK

| PULLED                          | TERMINATED               |                          | PATCHED |         |
|---------------------------------|--------------------------|--------------------------|---------|---------|
|                                 | ROOM                     | CONSOLE                  | ROOM    | CONSOLE |
| SP <input type="checkbox"/> KER | <input type="checkbox"/> | <input type="checkbox"/> | —       | —       |

Notes...

REVERB · EMT PLATE

| PULLED                                | TERMINATED               |                          | PATCHED |                          |
|---------------------------------------|--------------------------|--------------------------|---------|--------------------------|
|                                       | ROOM                     | CONSOLE                  | ROOM    | CONSOLE                  |
| <input checked="" type="checkbox"/> > | <input type="checkbox"/> | <input type="checkbox"/> | —       | <input type="checkbox"/> |
| <input checked="" type="checkbox"/> > | <input type="checkbox"/> | <input type="checkbox"/> | —       | <input type="checkbox"/> |
| <input checked="" type="checkbox"/> > | <input type="checkbox"/> | <input type="checkbox"/> | —       | <input type="checkbox"/> |
| <input checked="" type="checkbox"/> C | <input type="checkbox"/> | <input type="checkbox"/> | —       | —                        |

Notes...

# SOUNDCRAFT GHOST · CENTRE SECTION REAR

Every jack on the master section's rear panel, in the order the manual lists them - all ¼".  
Grey means nothing on the patch bay carries it yet.

## INPUTS

tip signal +, ring signal -, sleeve ground

○ ○

TRS balanced

Bay 7 · 17–18

○ ○

TRS balanced

Bay 7 · 19–20

○ ○

TRS balanced

Bay 7 · 21–22

○ ○

TRS balanced

Bay 7 · 23–24

○ ○

TRS balanced

Bay 9 · 17–18

○ ○

TRS balanced

Bay 9 · 19–20

## OUTPUTS

tip signal +, ring ground sense, sleeve ground;  
the TS unbalanced ones are tip signal +, ring not  
used, sleeve ground

○ ○ ○ ○ ○ ○ ○ ○

GRP 1-8

TRS ground-comp

Bay 10 · 17–24

○

AUX 1

TRS ground-comp

Bay 3 · 17

○

AUX 2

TRS ground-comp

Bay 3 · 18

○

AUX 3

TRS ground-comp

Bay 3 · 19

○

AUX 4

TRS ground-comp

Bay 3 · 20

○ ○

AUX 5 / 6

TRS ground-comp

Bay 3 · 21–22

○ ○

AUX 7 L/R

TRS ground-comp

Bay 3 · 23–24

○ ○

AUX 8 L/R

TRS ground-comp

Bay 4 · 17–18

○ ○

MIX 0/P L/R

TRS ground-comp

Bay 9 · 21–22

○ ○

MIX B 0/P L/R

TRS ground-comp

## INSERTS

tip RETURN, ring SEND, sleeve ground - the  
opposite of the usual tip-send wiring

○ ○ ○ ○ ○ ○ ○ ○

GRP INS 1-8

TRS insert

Bay 2 · 17–24

○ ○

MIX INS L/R

TRS insert

Bay 4 · 23–24

Bay 9 · 23–24

**CRM O/P L/R**



TS unbalanced

Bay 8 · 17–18

**ALT O/P L/R**



TS unbalanced

Bay 8 · 19

**STU O/P A L/R**



TRS ground-comp

Bay 8 · 21–22

**STU PHNS B L/R**




TS unbalanced

Bay 8 · 23–24


# SOLDERING · XLR TO TRS

Hot is XLR pin 2 to the tip, cold is pin 3 to the ring, shield is pin 1 to the sleeve. Hold a connector with the two pins up and the single pin down, and read the view that matches what you are looking at - the solder side is the mirror of the front. Every connector has the numbers moulded beside each contact; trust those over any drawing.

- 2 · hot (+)
- 3 · cold (-)
- 1 · shield

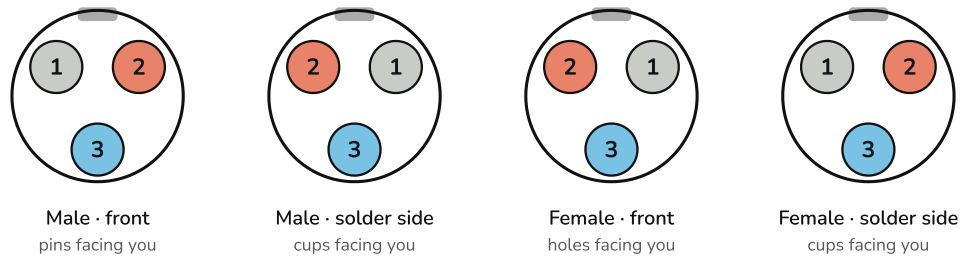

XLR numbering flips left to right between the front of a connector and its solder side.

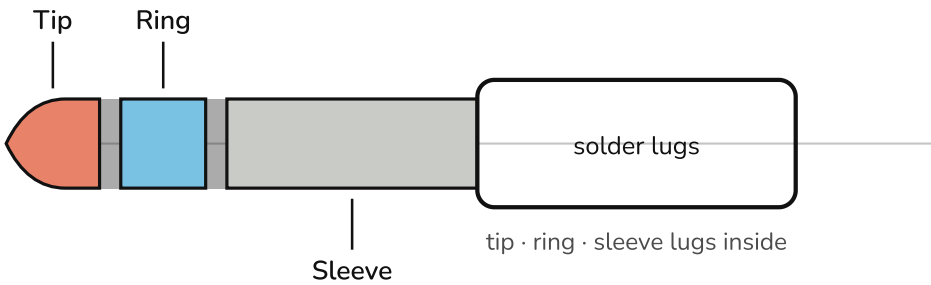

A ¼" TRS plug, tip first. The sleeve lug is the big one nearest the cable clamp.

| XLR   | SIGNAL  | TRS    | WIRE                  |
|-------|---------|--------|-----------------------|
| Pin 2 | Hot, +  | Tip    | Usually red or white  |
| Pin 3 | Cold, – | Ring   | Usually black or blue |
| Pin 1 | Shield  | Sleeve | Braid or drain wire   |

– **Ghost inserts are backwards from most desks:** tip is RETURN and ring is SEND on GRP INS and MIX INS. An insert cable built for another

console will have send and return swapped here.

- **Ghost outputs are ground compensated:** tip signal +, ring ground sense, sleeve ground. Wire them as TRS; a TS plug shorts the ring and throws that away. CRM, ALT and STU PHNS B are the plain unbalanced exceptions.
- **Going unbalanced on purpose?** Leave the ring unconnected at the source end rather than shorting it to sleeve, and keep the shield on sleeve at both ends.
- **Check before you trust it:** buzz tip, ring and sleeve against pins 2, 3 and 1 with a meter once the first cable is done, then build the rest to match.

## CONSOLE FAULTS

Running list for the next service session. Tick one when it is sorted.

0 of 1 sorted

☐

### Channel 6

noticed 2026-09-25

Intermittent - passes no signal unless the source is hot, and tapping the channel brings it back. Suspect a dry solder joint or dirty contact rather than a dead stage.

## IMPERFECT CRIMES

Shortcuts taken during the build, so nobody has to rediscover them with a meter. Ones tied to a port also show as an i on that bay.

|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Bay 1</b> • <b>port 19-20 bottom</b> | The D-Comp stereo return is wired unbalanced. No real loss here - the Ghost's insert points are unbalanced anyway (tip return, ring send).                                                                                                                                                                                                                                                                                                                                  |
| <b>Bay 4</b> • <b>port 17-18 top</b>    | Aux 8 is on the bay but not wired to anything yet - stereo send, no destination chosen.                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Bay 6</b> • <b>port 17-24 top</b>    | Stereo mult, installed 2026-09-27: all 8 top jacks joined as the L bus, all 8 bottom jacks as the R bus. Feed Studio A O/P into any one port, the other 7 are outputs. POLARITY IS WRONG on this bus: the cables used to build it have a manufacturing fault (tip and ring swapped on some legs), so feeds come out polarity-inverted against each other and cancel in the rooms. Known and lived with for now - rebuild the bus with cable that has been buzzed out first. |
| <b>Bay 8</b> • <b>port 19 bottom</b>    | Avantone Active MixCube: the lamp in its rear power switch is dead. The speaker and its supply are fine - the switch just doesn't light up, so don't go chasing a dead unit.                                                                                                                                                                                                                                                                                                |
| <b>Bay 9</b> • <b>port 17-18 bottom</b> | Bay to the Ghost 2 Track A input is 2x unshielded TRS cables, about 6 ft, inside the rack. They also pass through a poor junction behind the console that may be flaky - replace it.                                                                                                                                                                                                                                                                                        |
| <b>Bay 9</b> • <b>port 19-20 bottom</b> | Runs through the same poor junction behind the console as the 2 Track A feed - suspect it first if this input goes intermittent.                                                                                                                                                                                                                                                                                                                                            |
| <b>Bay 10</b> • <b>port 1 top</b>       | Both stereo sends to the kitchen run unbalanced for the last stretch: the tail behind the wall plate was too short, so they are extended with unbalanced extenders. To be redone properly with a balanced junction.                                                                                                                                                                                                                                                         |
| <b>Bay 10</b> • <b>port 9 top</b>       | Mono line sends, one per porch, feeding the amp that drives the porch speakers.                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Room XLR runs</b>                    | While spooling out the cable, every XLR run from a room to the console is flagged with black tape at BOTH ends - room side and console side - because the parts to finish them aren't here yet. Anything without a black flag was soldered and jacked into the patch bay as it was pulled. So: black flag = still to terminate.                                                                                                                                             |

## TO DO

0 of 8 done

- ☐ Find the screws for all the cover plates
- ☐ Gather every cover plate in one place
- ☐ Work out which rooms are missing cover plates - Kitchen and Guest Bed are, the rest unknown
- ☐ Go back to every black-flagged XLR run and terminate it once the parts arrive
- ☐ Identify the stray XLR sticking out of the loom behind the desk (Steve found it) - it comes from one of the rooms, but which one is unknown. Tone it out and label both ends
- ☐ Rebuild the bay 6 mult bus - the jumper cables have tip and ring swapped on some legs, so the room feeds are polarity-inverted against each other
- ☐ Redo the kitchen stereo sends with a balanced junction instead of the unbalanced extenders
- ☐ Replace the flaky junction behind the console that the Ghost 2 Track A and B inputs run through

Anything else...

MIDI HOOKUPS

0 of 11 connected

| INSTRUMENT               |                     | PORT     | PRIORITY     | MIDI PATCH BAY                |
|--------------------------|---------------------|----------|--------------|-------------------------------|
| <input type="checkbox"/> | Moog Sub 37         | MIDI In  | Required     | Not assigned                  |
|                          |                     | MIDI Out | Required     | Not assigned                  |
| <input type="checkbox"/> | Waldorf Streichfett | MIDI In  | Required     | Not assigned                  |
|                          |                     | MIDI Out | Low priority | Not assigned                  |
| <input type="checkbox"/> | MFB Tanzbar         | MIDI In  | Required     | Not assigned                  |
|                          |                     | MIDI Out | Low priority | Not assigned                  |
| <input type="checkbox"/> | Sim n Tonic         | MIDI In  | Required     | Not assigned                  |
|                          |                     |          |              | Check which MIDI ports it has |
| <input type="checkbox"/> | Oberheim OB-X8      | MIDI In  | Required     | Not assigned                  |
|                          |                     | MIDI Out | Required     | Not assigned                  |
| <input type="checkbox"/> | Oberheim OB-6       | MIDI In  | Required     | Not assigned                  |
|                          |                     | MIDI Out | Required     | Not assigned                  |