


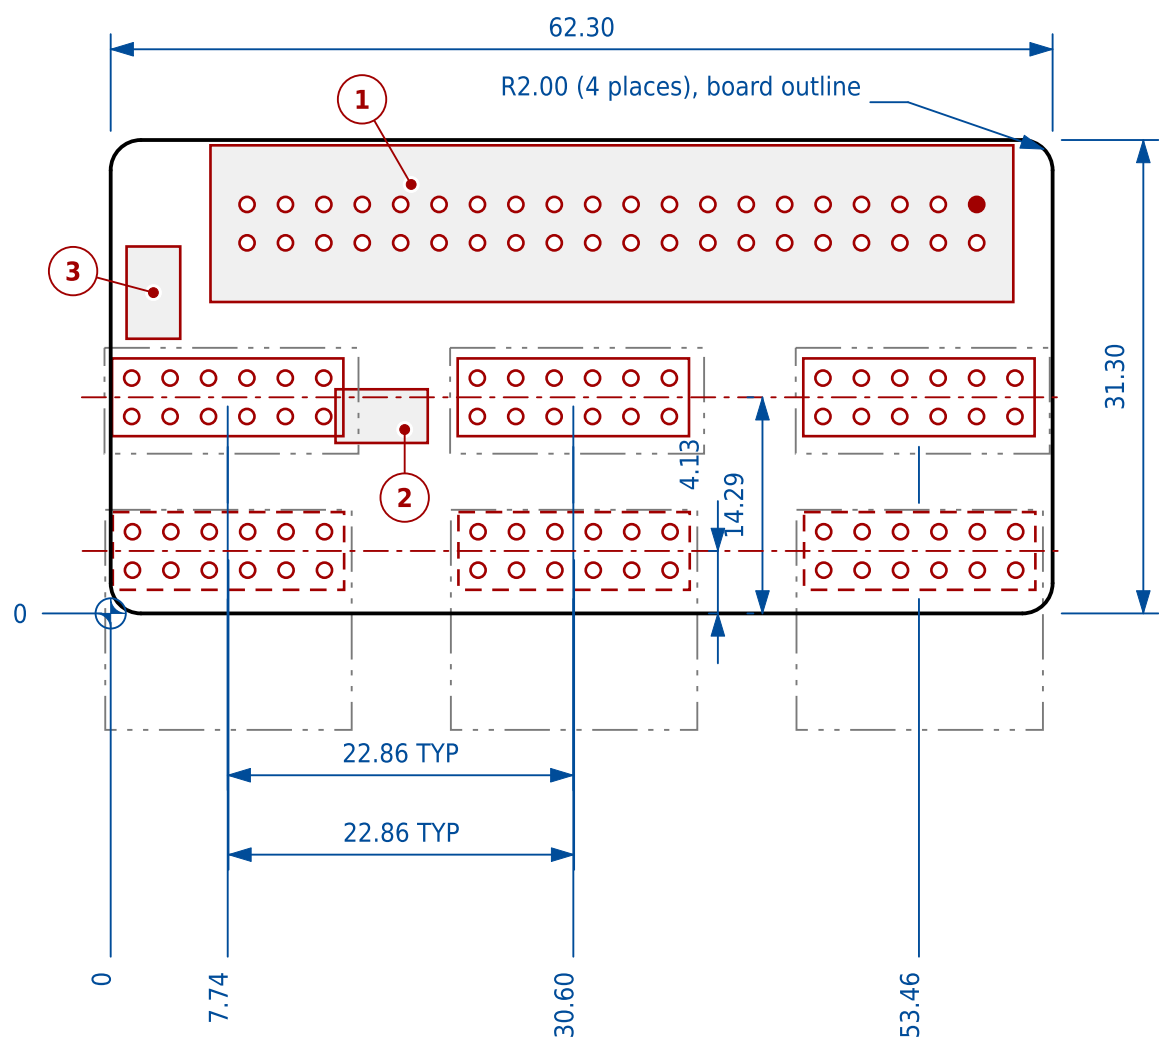

NOTES

1. Viewed from the component side.
2. Sits on a Raspberry Pi's 40-pin header by the SMT socket J1 on its underside, component side up, and lies flat beside the FPGA board: the three right-angle plugs go sideways into its Pmod hosts, and the three sockets J5 to J7 face up.
3. PLUG rows are right-angle 2x6 headers on the component side, pins out past the lower edge. Their fields sit 10.16 mm below the HOST fields and 0.05 mm to the right, on the 22.86 mm host pitch.
4. PIN MAPPING NOT YET RIGHT: laid flat this way the plug rows meet a host's in mirror image, pin 1 on pin 6, and the ports reverse. The copper is to be redone before the board is made; nothing on this sheet moves when it is.
5. Fits a Raspberry Pi 5 or 3B. Not a 3B+ or 4B: their PoE header stands 8.5 mm tall under J1, where the board sits 6.34 mm up.
6. No mounting holes: the Pi's header carries the board. BP-TT and BP-ARTY hold the pair with a demoboard or an Arty.

NOTES (continued)

7. The pin map, read from the same board file, is PI_HEADER and PORT_PINS in accessories/raspmo

SOURCES

1. KiCad board file:
<https://github.com/mithro/tinytapeout-demoboard-to-raspi>
TTDB_2_Raspi.kicad_pcb @ 33386eb - title block: TT Demoboard To Raspi Direct rev 2.0, dated 2026-09-29, Psychogenic Technologies; branch direct-gpio, made by scripts/make_direct.py over <https://github.com/psychogenic/tinytapeout-demoboard-to-raspi> @ 2c2e3db
2. What changed:
<https://github.com/mithro/tinytapeout-demoboard-to-raspi/blob/direct-gpio/README.md> - J1 an SMT socket underneath, J2 to J4 right-angle on top, 10 mm cut off the pin-40 end with J9, J10 and SW1, pin 17 unconnected
3. Socket: <https://www.adafruit.com/product/2187> - Adafruit 2187, Kaweei CS25582-40G-M36-0A: 3.8 mm tall, pins through the PCB

PMOD HEADERS

PORT	REF	ROLE	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
P1	J5	host	bottom	7.740	14.290	14.090	15.560
P1	J2	plug	bottom	7.790	4.130	14.140	5.400
P2	J6	host	bottom	30.600	14.290	36.950	15.560
P2	J3	plug	bottom	30.650	4.130	37.000	5.400
P3	J7	host	bottom	53.460	14.290	59.810	15.560
P3	J4	plug	bottom	53.510	4.130	59.860	5.400

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	40-way socket J1 onto the Raspberry Pi GPIO, 2x20 SMT, underside	6.60 to 59.70	20.59 to 30.95
2	Clock and reset socket J8, 1x2	14.87 to 20.97	11.27 to 14.82
3	Power jumper J11: Pi 3V3 to the Pmod VCC rail	1.05 to 4.60	18.16 to 24.26

LEGEND

- Board outline
- Component body, scheduled
- On the underside, seen through the board
- Pmod connector body
- Dimension, extension and leader

RASPMOD, DIRECT

TT Demoboard To Raspi Direct rev 2.0: on the Pi's GPIO header, flat beside the demoboard or an Arty

DRAWN		VERSION		UNITS		SCALE	
generated		v0.0-428-ge99aeaa		mm		2:1	
SIZE	SHEET		DRAWING NO				REV
A3	1 OF 1		ACC-HAT-DRMOD				A
MATERIAL			GENERAL TOLERANCE				
PCB, 1.6 nominal			edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08				