


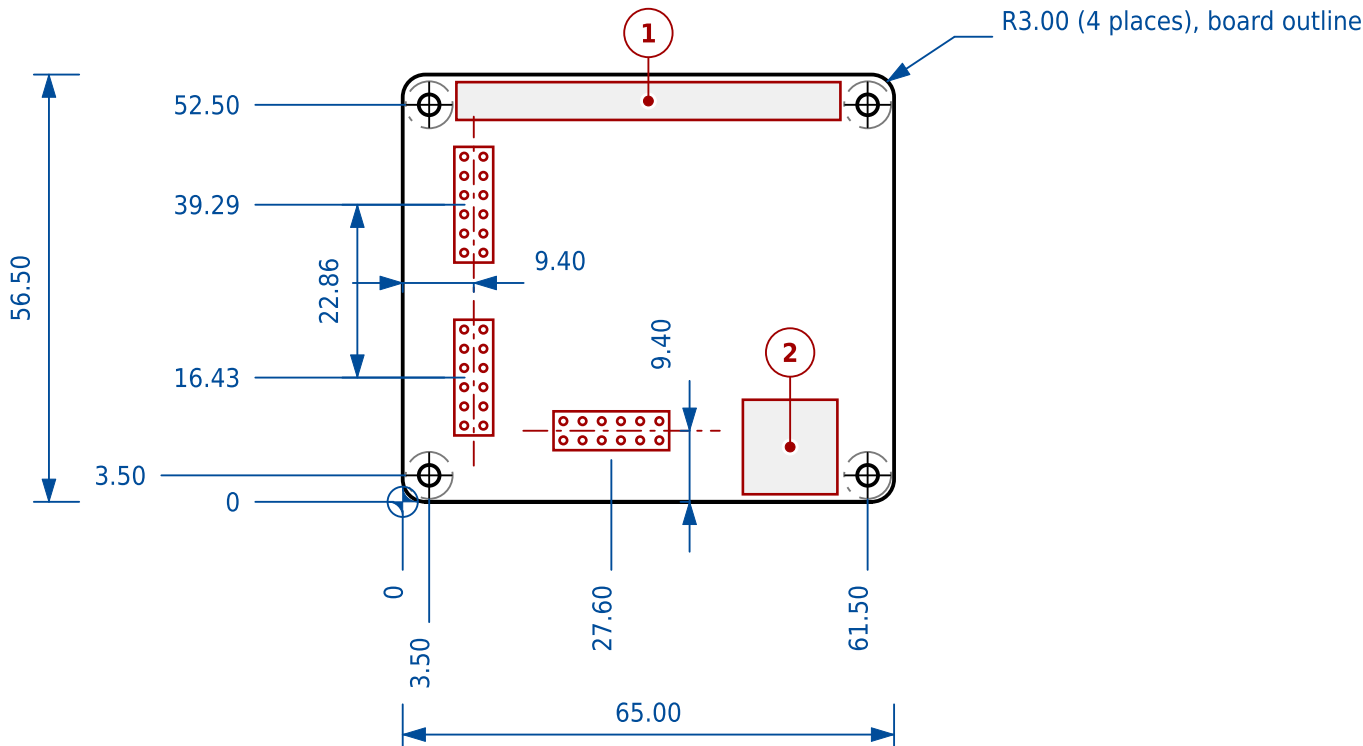

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.50	3.50	2.75	6.20
MT2	61.50	3.50	2.75	6.20
MT3	3.50	52.50	2.75	6.20
MT4	61.50	52.50	2.75	6.20

PMOD HOST HEADERS

PORT	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
JA	left	9.400	39.290	8.130	45.640
JB	left	9.400	16.430	8.130	22.780
JC	bottom	27.600	9.400	21.250	8.130

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	40-pin GPIO socket (mates with the Pi)	7.10 to 57.90	50.50 to 55.50
2	5 V barrel jack J2	45.00 to 57.50	1.00 to 13.50

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

NOTES

- All dimensions in millimetres. The datum symbol marks the origin: the lower-left corner of the board outline, X right, Y up, viewed from the component side.
- DERIVED DIMENSIONS. Digilent publish no mechanical drawing, DXF, STEP or board file for this product. Pmod host positions were measured photogrammetrically and are good to about +/-0.75 mm.
- JA and JB face out of the left edge, JC out of the lower edge. All three are right-angle hosts: the connector body overhangs the board edge by roughly 3 mm and the through-hole field sits about 9.4 mm in from it, so a mating Pmod peripheral plugs in from outside that edge.
- JA and JB are snapped to the 22.86 mm host spacing the Pmod Interface Specification mandates; they measured 23.18 mm apart, inside the measurement uncertainty.
- The board outline, corner radii and mounting holes are the Raspberry Pi HAT specification's, which this board conforms to, and carry that specification's figures. Only the Pmod host positions are derived.
- The chain-double-dot rectangle at each Pmod host is the connector body where it overhangs the board edge. Not a board feature: it is what a peripheral and a bracket must clear.
- Pmod host coordinates are given to three decimals, unlike the rest of this sheet. Rounded to two, adjacent hosts print 22.85 apart and contradict the 22.86 pitch dimensioned here.

NOTES (continued)

- Port names differ by family: JA, JB, JC after Digilent on the adapter and Raspberry Pi sheets; by signal direction on the demo boards, after the silkscreen; PMOD 1 to 3 on the plate sheets, which number plate positions. TT-MP-02 maps them.
- Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

SOURCES

- Raspberry Pi HAT mechanical specification: <https://github.com/raspberrypi/hats-hat-board-mechanical.pdf> - 65 x 56.0 or 65 x 56.5 mm (56.5 for an SMT 40-way header), 3 mm corner radii, four 2.75 mm holes 3.5 mm in from the edges on a 58 x 49 mm rectangle.
- Pmod Interface Specification 1.2.0: https://digilent.com/reference/_media/reference/pmod/pmod-interface-specification-1_2_0.pdf - Digilent, revised 5 October 2017. Host ports on a common board edge are spaced .90 in (22.86 mm) centre to centre; pins are on a .10 in (2.54 mm) grid in both axes.
- Board outline: <https://digilent.com/reference/add-ons/pmod-hat/start> - Digilent state width 65 mm, length 56.5 mm.
- Pmod host positions: https://digilent.com/reference/_media/reference/add-ons/pmod-hat/pmod-hat-adapter-top-1000.png - Measured from Digilent's official top view by scripts/measure_pmod_hat.py. Digilent publish no dimensioned drawing for this board.

DIGILENT PMOD HAT ADAPTER

410-366, fitted to a Raspberry Pi 40-pin GPIO header

DRAWN	DATE	UNITS	SCALE
generated	2026-09-10	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	ACC-01	A
MATERIAL		GENERAL TOLERANCE	
PCB, thickness not stated		HAT spec outline; hosts DERIVED +/-0.75, see notes	