


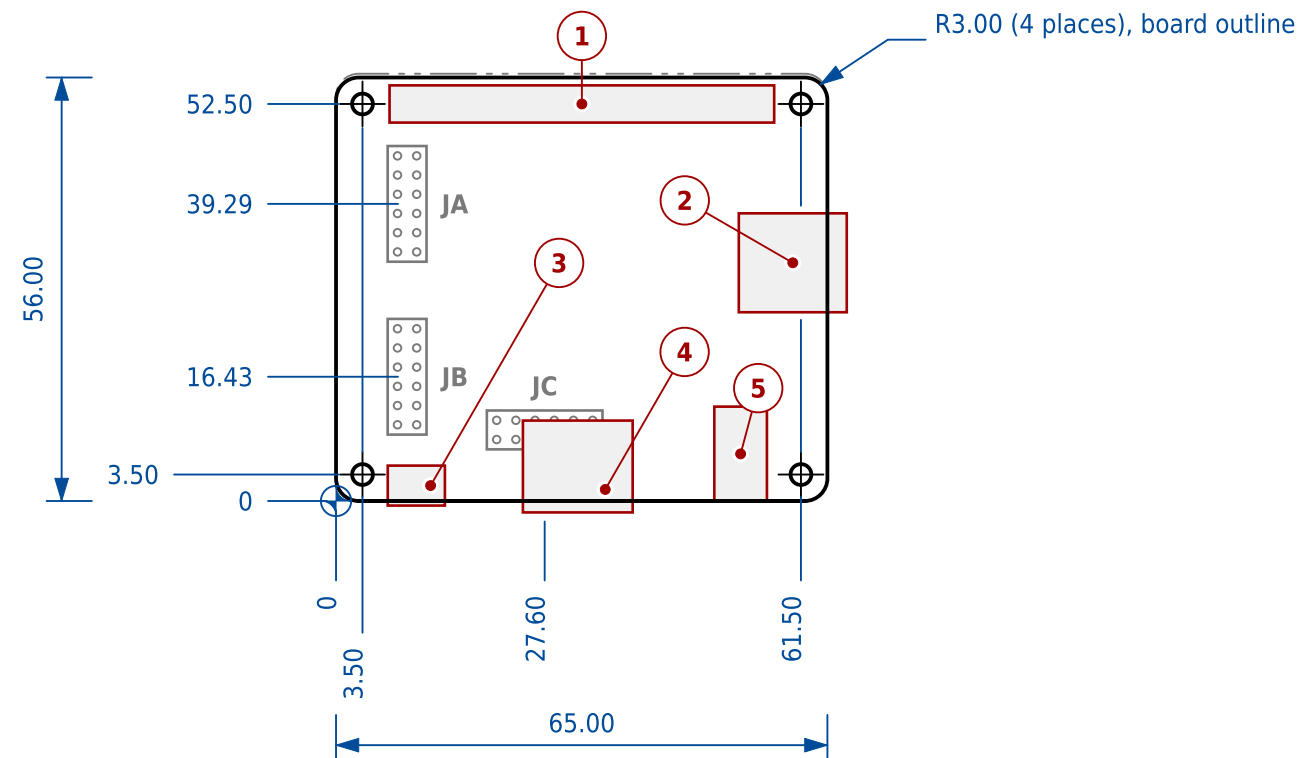

NOTES

- All dimensions in millimetres. The datum symbol marks the origin: the lower-left corner of the board's outline, X right, Y up, viewed from the component side.
- Phantom outline is the Digilent Pmod HAT Adapter fitted to the 40-pin GPIO header, drawn in this board's frame because its mounting holes coincide with this board's.
- Connector outlines are the component body as drawn by Raspberry Pi Ltd, overhang past the board edge included.
- Mounting hole diameter: Carried over from the Pi 3 Model B drawing; the 3A+ gives neither a hole size nor a tolerance, so the Model B's ± 0.05 is not repeated.
- Hole IDs are assigned by this drawing, bottom row first then left to right, and mean the same thing on every Raspberry Pi sheet here.
- Design mounting hole keep-outs to 6.2 mm diameter on every model. That is what the Raspberry Pi HAT mechanical specification (github.com/raspberrypi/hats) requires around each hole, and it is the largest of the figures the individual models publish. The KEEPOUT column gives what this model's own drawing shows, which is not always anything.
- The source drawing is a reduced plot, not 1:1. Its scale was recovered from the mounting hole rectangle as 1.0685 and applied. Residual error over the 85 mm width is a few tenths of a millimetre, so treat every dimension on this sheet as ± 0.5 rather than the ± 0.20 the other models carry.
- Hole positions are the 3.5 mm inset and 58 x 49 mm rectangle dimensioned on this model's drawing.

NOTES (continued)

- Pmod host JC on the Pmod HAT Adapter overhangs the lower board edge in the same region as this board's HDMI and power connectors. Digilent's own reference manual warns to fit the two standoffs opposite the 40-pin connector so that JC's pins cannot touch the HDMI shell.
- Those host positions are DERIVED, not published: Digilent issue no mechanical drawing for the adapter. Good to about ± 0.75 mm. JA and JB face out of the left edge, JC out of the lower edge, all right-angle hosts whose bodies overhang the edge. The Pmod HAT Adapter sheet has the derivation.
- Pmod host coordinates are given to three decimals, unlike the rest of this sheet. Rounded to two, adjacent hosts print 22.85 apart and contradict the 22.86 pitch dimensioned here.
- Port names differ by family: JA, JB, JC after Digilent on the adapter and Raspberry Pi sheets; by signal direction on the demo boards, after the silkscreen; PMOD 1 to 3 on the plate sheets, which number plate positions. TT-MP-02 maps them.
- Assembled envelope, connector overhang included, is 67.56 x 57.51 mm against a 65.00 x 56.00 mm board outline. The FEATURE SCHEDULE gives the extents.

SOURCES

- Mechanical drawing:
<https://datasheets.raspberrypi.com/rpi3/raspberry-pi-3-a-plus-mechanical-drawing.pdf> - Raspberry Pi Ltd

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.50	3.50	2.75	not given
MT2	61.50	3.50	2.75	not given
MT3	3.50	52.50	2.75	not given
MT4	61.50	52.50	2.75	not given

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	40-pin GPIO header	7.08 to 57.96	50.04 to 54.96
2	USB 2.0 type A (single)	53.28 to 67.56	24.96 to 38.04
3	micro-USB power input	6.84 to 14.40	-0.60 to 4.68
4	HDMI type A	24.72 to 39.24	-1.51 to 10.63
5	3.5 mm A/V jack	50.04 to 57.00	-0.02 to 12.48

PMOD HAT ADAPTER HOSTS

PORT	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
JA	left edge	9.400	39.290	8.130	45.640
JB	left edge	9.400	16.430	8.130	22.780
JC	bottom edge	27.600	9.400	21.250	8.130

SOURCES (continued)

- Mounting holes:
<https://datasheets.raspberrypi.com/rpi3/raspberry-pi-3-a-plus-mechanical-drawing.pdf> - Carried over from the Pi 3 Model B drawing; the 3A+ gives neither a hole size nor a tolerance, so the Model B's ± 0.05 is not repeated.

LEGEND

- Board outline
- Component body, scheduled
- Adjacent part
- Dimension, extension and leader

RASPBERRY PI 3 MODEL A+

65 x 56 mm

DRAWN	DATE	UNITS	SCALE
generated	2026-09-10	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	RPI-01	A
MATERIAL		GENERAL TOLERANCE	
PCB, thickness not stated		reduced-source plot, see note: ± 0.5 typical	