


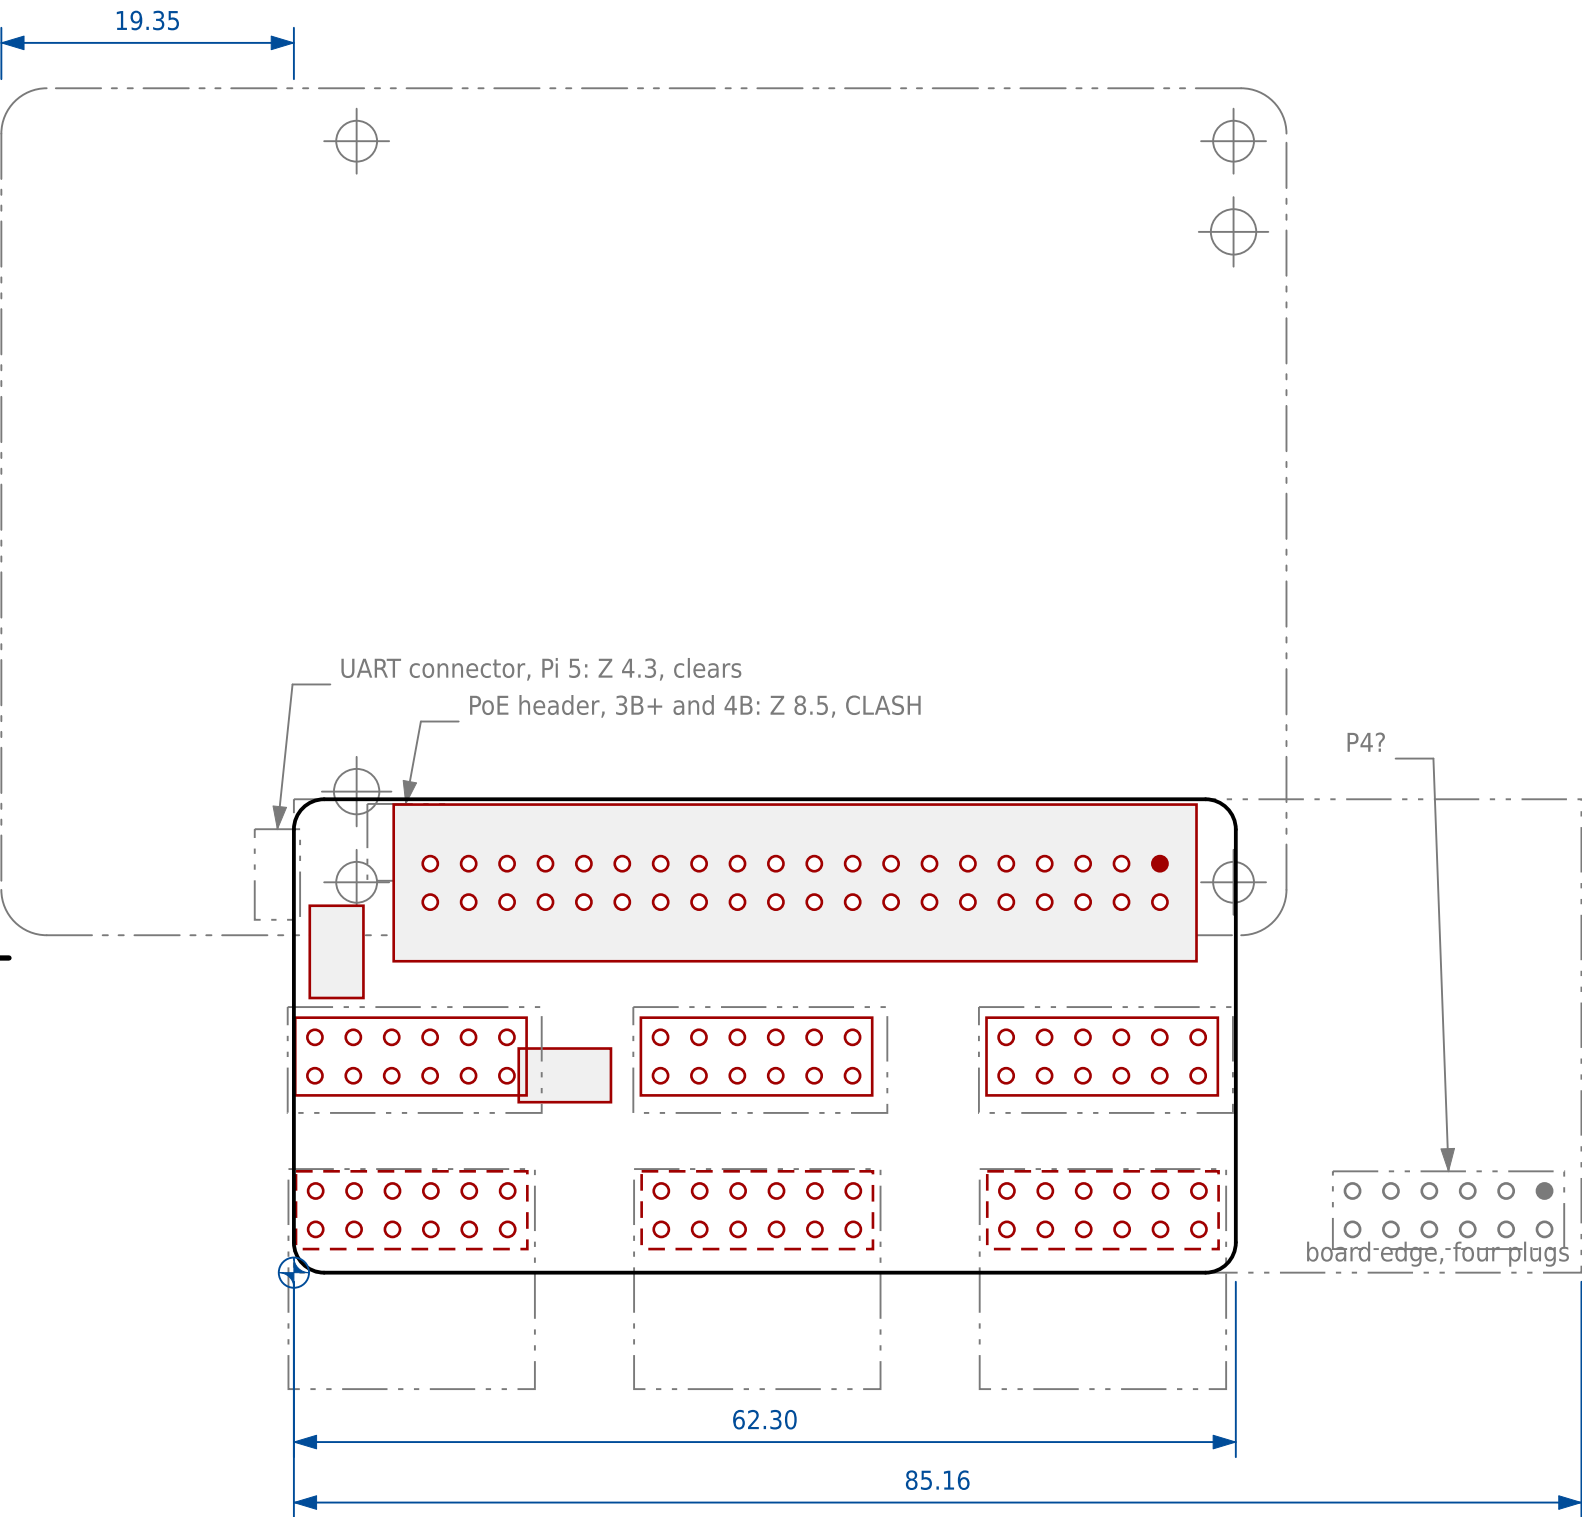

NOTES

1. Viewed from the component side; the Pi is seen through the adapter.
2. Phantom outline is the Raspberry Pi -- the 85 x 56 outline, four holes and 40-pin header every Model B sized model shares, and the Pi 5's two extra holes -- turned a half turn to the adapter: the adapter's pin 1, at (57.28, 27.04), sits on the Pi's pin 1, at (8.37, 51.27) on the Pi.

NOTES (continued)

3. The adapter's underside is 6.34 above the Pi's top face (its header body 2.54, the socket 3.8), and it covers the Pi from X 3.35 to 65.65 and Y 47.01 out past the header edge. A part of the Pi in that strip and taller than that stops it seating; the boxes are those parts, with their heights. Every model's USB and Ethernet stack stands beyond the adapter's far end and is not drawn.

UNDER THE ADAPTER, on the Pi

PART	MODELS	CX mm	CY mm	Z mm	
PoE header	3B+ and 4B	58.25	49.86	8.5	CLASH
UART connector	Pi 5	66.74	51.98	4.3	clears

THE ADAPTER ON THE PI, in the Pi's frame

	X mm	Y mm
Adapter pin 1 on the Pi	8.37	51.27
Adapter, near corner	3.35	47.01
Adapter, far corner	65.65	78.31

LEGEND

- The adapter, its outline
- Component body, scheduled on the adapter's sheet
- - - On the adapter's underside, seen through it
- - - The Raspberry Pi under it, and what is on it; P4? and the edge of a board four plugs wide
- Dimension, extension and leader

NOTES (continued)

4. PoE header, 3B+ and 4B: Z 8.5, CLASH, 2.16 too tall. Pi 4 drawing: centre 25.75 from the header's centre and 6.14 from the edge, a 2x2 on the 2.54 pitch, as tall as the 40-pin header (Z 8.5); the 3B+ drawing's PoE silk is at the same place.
5. UART connector, Pi 5: Z 4.3, clears by 2.04. Pi 5 drawing, read from its vectors: a 3.0 x 6.0 outline beside MT4, 6 from the edge; height ASSUMED 4.3 at most, a JST SH.
6. FITS a Pi 3 Model B or a Pi 5; NOT a 3 Model B+ or a 4 Model B, whose PoE header is under it.
7. P4? is a fourth plug one host pitch, 22.86, beyond P3, and the phantom edge is a board four plugs wide, 85.16. The Pi has nothing under the board there; grown the other way it meets the Pi's USB and Ethernet stack.
8. The adapter is ACC-HAT-DRMOD, which governs it, and whose pin mapping is not yet right: its plugs mate in mirror image as drawn.

SOURCES

1. Adapter: accessories/raspmo_direct.py, ACC-HAT-DRMOD - outline, plugs, socket pin 1
2. Raspberry Pi: raspberry_pi/boards.py - outline, holes and header, from Raspberry Pi Ltd's drawings; the parts under the adapter from the Pi 4 and Pi 5 drawings, accessories/pi_under.py

RASPMOD, DIRECT, ON A RASPBERRY PI

Every Model B sized Pi under the adapter, pin 1 on pin 1, and where a fourth plug would go

DRAWN		VERSION		UNITS		SCALE	
generated		v0.0-428-ge99aeaa		mm		2:1	
SIZE	SHEET		DRAWING NO				REV
A3	1 OF 1		ACC-FIT-DRMOD				A
MATERIAL			GENERAL TOLERANCE				
- not a made part			reference only - the boards' own sheets govern them				