


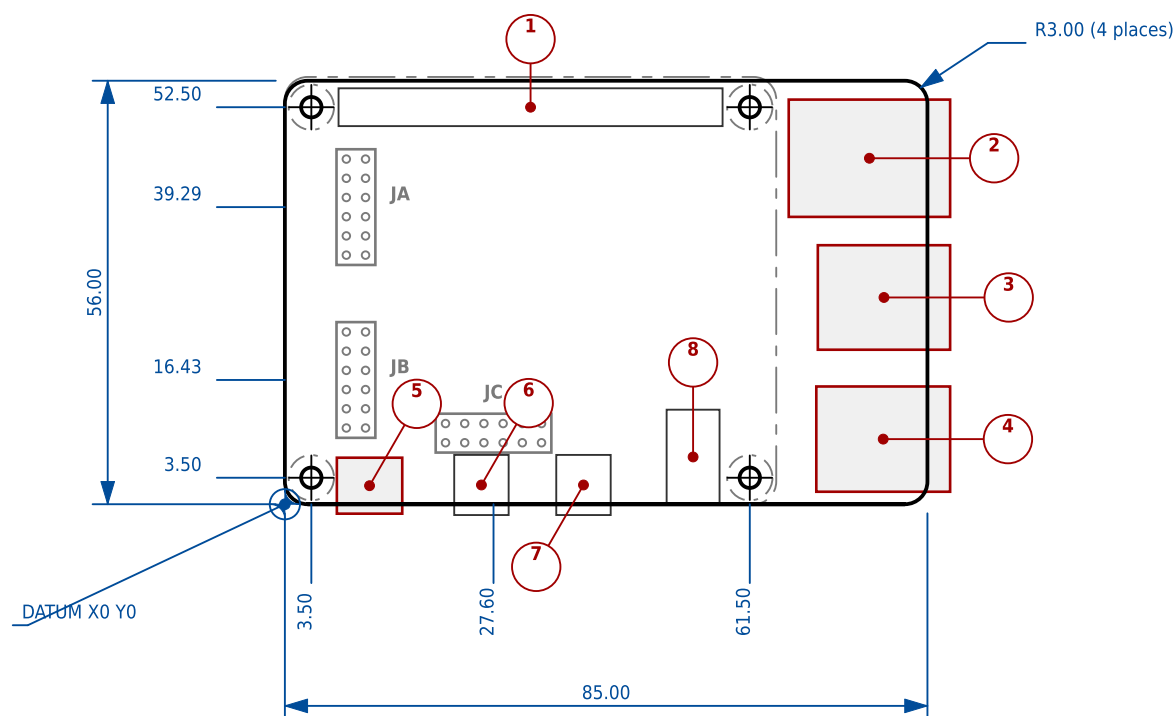

HOLE SCHEDULE

ID	X	Y	DIA	KEEPOUT
H1	3.50	3.50	2.70	6.00
H2	3.50	52.50	2.70	6.00
H3	61.50	3.50	2.70	6.00
H4	61.50	52.50	2.70	6.00

FEATURE SCHEDULE

#	FEATURE	X EXTENT	Y EXTENT
1	40-pin GPIO header	7.10 to 57.90	50.00 to 55.00
2	Ethernet RJ45	66.65 to 88.00	37.99 to 53.51
3	USB 3.0 type A (upper pair)	70.50 to 88.00	20.43 to 34.25
4	USB 2.0 type A (lower pair)	70.30 to 88.00	1.65 to 15.57
5	USB-C power input	6.88 to 15.53	-1.25 to 6.15
6	micro-HDMI 0	22.40 to 29.60	-1.43 to 6.52
7	micro-HDMI 1	35.90 to 43.10	-1.43 to 6.52
8	3.5 mm A/V jack	50.50 to 57.50	0.00 to 12.50

PMOD HAT ADAPTER HOSTS

PORT	EDGE	CX	CY
JA	left edge	9.40	39.29
JB	left edge	9.40	16.43
JC	bottom edge	27.60	9.40

NOTES

1. All dimensions in millimetres. Datum is the lower-left corner of the board outline; X to the right, Y up, viewed from the component side.
2. Hole and Pmod positions are ordinate dimensions from that single datum, so they do not accumulate tolerance.
3. Phantom outline is the Digilent Pmod HAT Adapter fitted to the 40-pin GPIO header. Its Pmod host positions are given in this board's coordinate frame, since the adapter's mounting holes coincide with this board's.
4. Connector outlines are the component body as drawn by Raspberry Pi Ltd, including any overhang past the board edge.
5. Mounting hole diameter: Read from the DXF: hole and keep-out circles on layer 0.
6. Pmod host JC on the Pmod HAT Adapter overhangs the lower board edge in the same region as this board's HDMI and power connectors. Digilent's own reference manual warns to fit the two standoffs opposite the 40-pin connector so that JC's pins cannot touch the HDMI shell.
7. Pmod HAT Adapter: DERIVED DIMENSIONS. Digilent publish no mechanical drawing, DXF, STEP or board file for this product. Pmod host positions were measured photogrammetrically and are good to about ± 0.75 mm.
8. Pmod HAT Adapter: JA and JB face out of the left edge, JC out of the lower edge. All three are right-angle hosts: the connector body overhangs the board edge by roughly 3 mm and the through-hole field sits about 9.4 mm in from it, so a mating Pmod peripheral plugs in from outside that edge.
9. Pmod HAT Adapter: JA and JB are snapped to the 22.86 mm host spacing the Pmod Interface Specification mandates; they measured 23.18 mm apart, inside the measurement uncertainty.

SOURCES

10. Fabrication tolerance is not called out per dimension. Assume +/-0.20 on the routed board edge, +/-0.10 on drilled hole position and +/-0.08 on plated hole diameter unless the board house states otherwise.

1. Mechanical drawing: <https://datasheets.raspberrypi.com/rpi4/raspberry-pi-4-mechanical-drawing.dxf> - Raspberry Pi Ltd
2. Mounting holes: <https://datasheets.raspberrypi.com/rpi4/raspberry-pi-4-mechanical-drawing.dxf> - Read from the DXF: hole and keep-out circles on layer 0.

RASPBERRY PI 4 MODEL B

85 x 56 mm

DRAWN	DATE	UNITS	SCALE
generated	2026-09-10	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	RPI-04	A