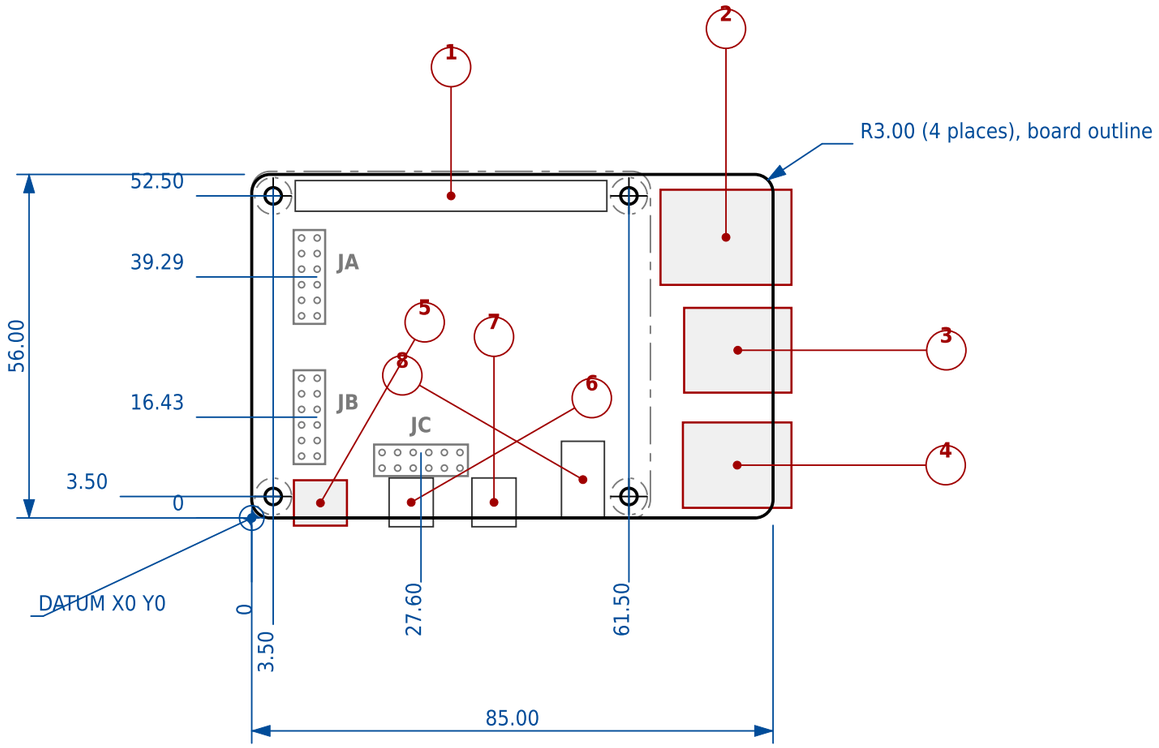


HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.50	3.50	2.70	6.00
MT2	61.50	3.50	2.70	6.00
MT3	3.50	52.50	2.70	6.00
MT4	61.50	52.50	2.70	6.00

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	40-pin GPIO header	7.10 to 57.90	50.00 to 55.00
2	Ethernet RJ45	66.65 to 88.00	37.99 to 53.51
3	USB 3.0 type A (upper pair)	70.50 to 88.00	20.43 to 34.25
4	USB 2.0 type A (lower pair)	70.30 to 88.00	1.65 to 15.57
5	USB-C power input	6.88 to 15.53	-1.25 to 6.15
6	micro-HDMI 0	22.40 to 29.60	-1.43 to 6.52
7	micro-HDMI 1	35.90 to 43.10	-1.43 to 6.52
8	3.5 mm A/V jack	50.50 to 57.50	0.00 to 12.50

PMOD HAT ADAPTER HOSTS

PORT	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
JA	left edge	9.40	39.29	8.13	45.64
JB	left edge	9.40	16.43	8.13	22.78
JC	bottom edge	27.60	9.40	21.25	8.13

2. Mounting holes: https://datasheets.raspberrypi.com/rpi4/raspberry-pi-4-mechanical-drawing.dxf - Read from the DXF: hole and keep-out circles on layer 0.

NOTES

1. All dimensions in millimetres. Datum is the lower-left corner of the board outline; X right, Y up, viewed from the component side.
2. Phantom outline is the Digilent Pmod HAT Adapter fitted to the 40-pin GPIO header, drawn in this board's frame because its mounting holes coincide with this board's.
3. Connector outlines are the component body as drawn by Raspberry Pi Ltd, overhang past the board edge included.
4. Mounting hole diameter: Read from the DXF: hole and keep-out circles on layer 0.
5. Hole IDs are assigned by this drawing, bottom row first then left to right, and mean the same thing on every Raspberry Pi sheet here.
6. Pmod host JC on the Pmod HAT Adapter overhangs the lower board edge in the same region as this board's HDMI and power connectors. Digilent's own reference manual warns to fit the two standoffs opposite the 40-pin connector so that JC's pins cannot touch the HDMI shell.
7. Those host positions are DERIVED, not published: Digilent issue no mechanical drawing for the adapter. Good to about +/-0.75 mm. JA and JB face out of the left edge, JC out of the lower edge, all right-angle hosts whose bodies overhang the edge. The Pmod HAT Adapter sheet has the derivation.

SOURCES

1. Mechanical drawing: https://datasheets.raspberrypi.com/rpi4/raspberry-pi-4-mechanical-drawing.dxf - Raspberry Pi Ltd

RASPBERRY PI 4 MODEL B

85 x 56 mm

DRAWN	DATE	UNITS	SCALE
generated	**2026-09-10**	**mm**	**1:1**
SIZE	SHEET	DRAWING NO	REV
A3	**1 OF 1**	**RPI-04**	**A**
MATERIAL	GENERAL TOLERANCE		PROJECTION
PCB	**edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08**		