


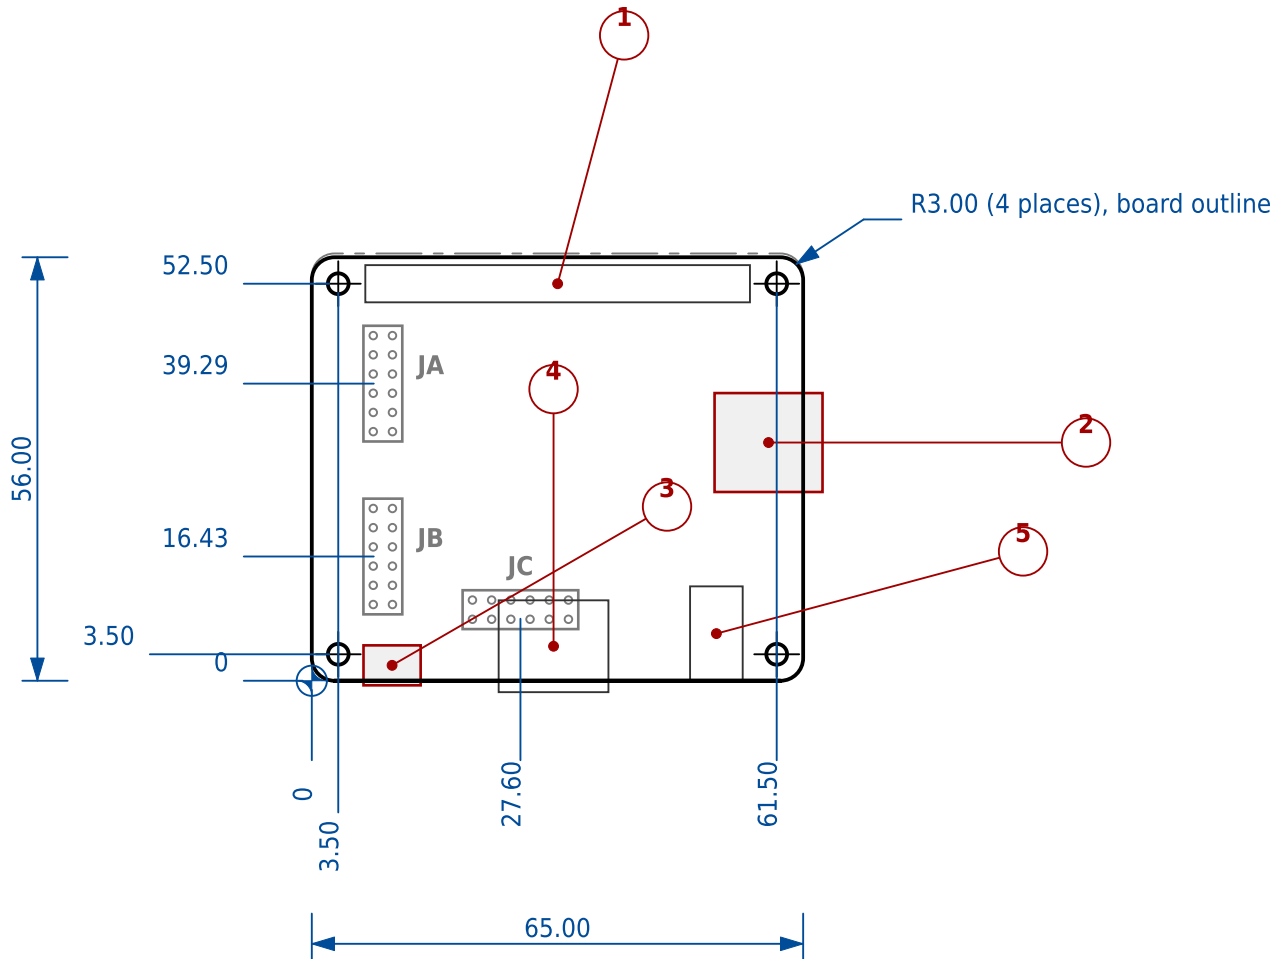

NOTES

1. All dimensions in millimetres. The datum symbol marks the origin: the lower-left corner of the board outline, X right, Y up, viewed from the component side.
2. Phantom outline is the Digilent Pmod HAT Adapter fitted to the 40-pin GPIO header, drawn in this board's frame because its mounting holes coincide with this board's.
3. Connector outlines are the component body as drawn by Raspberry Pi Ltd, overhang past the board edge included.
4. Mounting hole diameter: Carried over from the Pi 3 Model B drawing. The 3A+ drawing gives no hole size.
5. Hole IDs are assigned by this drawing, bottom row first then left to right, and mean the same thing on every Raspberry Pi sheet here.

NOTES (continued)

6. No mounting hole keep-out is dimensioned on this model's own drawing. Design to the 6.2 mm the Raspberry Pi HAT mechanical specification (github.com/raspberrypi/hats) requires around each hole.
7. The source drawing is a reduced plot, not 1:1, so dimensions carry more uncertainty than the other models; the recovered plot scale was 1.0685.
8. Hole positions are the 3.5 mm inset and 58 x 49 mm rectangle dimensioned on this model's drawing.
9. Pmod host JC on the Pmod HAT Adapter overhangs the lower board edge in the same region as this board's HDMI and power connectors. Digilent's own reference manual warns to fit the two standoffs opposite the 40-pin connector so that JC's pins cannot touch the HDMI shell.

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.50	3.50	2.75 +/-0.05	not given
MT2	61.50	3.50	2.75 +/-0.05	not given
MT3	3.50	52.50	2.75 +/-0.05	not given
MT4	61.50	52.50	2.75 +/-0.05	not given

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	40-pin GPIO header	7.08 to 57.96	50.04 to 54.96
2	USB 2.0 type A (single)	53.28 to 67.56	24.96 to 38.04
3	micro-USB power input	6.84 to 14.40	-0.60 to 4.68
4	HDMI type A	24.72 to 39.24	-1.51 to 10.63
5	3.5 mm A/V jack	50.04 to 57.00	-0.02 to 12.48

PMOD HAT ADAPTER HOSTS

PORT	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
JA	left edge	9.40	39.29	8.13	45.64
JB	left edge	9.40	16.43	8.13	22.78
JC	bottom edge	27.60	9.40	21.25	8.13

NOTES (continued)

10. Those host positions are DERIVED, not published: Digilent issue no mechanical drawing for the adapter. Good to about +/-0.75 mm. JA and JB face out of the left edge, JC out of the lower edge, all right-angle hosts whose bodies overhang the edge. The Pmod HAT Adapter sheet has the derivation.

SOURCES

1. Mechanical drawing:
<https://datasheets.raspberrypi.com/rpi3/raspberry-pi-3-a-plus-mechanical-drawing.pdf> - Raspberry Pi Ltd
2. Mounting holes:
<https://datasheets.raspberrypi.com/rpi3/raspberry-pi-3-a-plus-mechanical-drawing.pdf> - Carried over from the Pi 3 Model B drawing. The 3A+ drawing gives no hole size.

RASPBERRY PI 3 MODEL A+

65 x 56 mm

DRAWN	DATE	UNITS	SCALE
generated	2026-09-10	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	RPI-01	A
MATERIAL	GENERAL TOLERANCE		PROJECTION
PCB	edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08		