


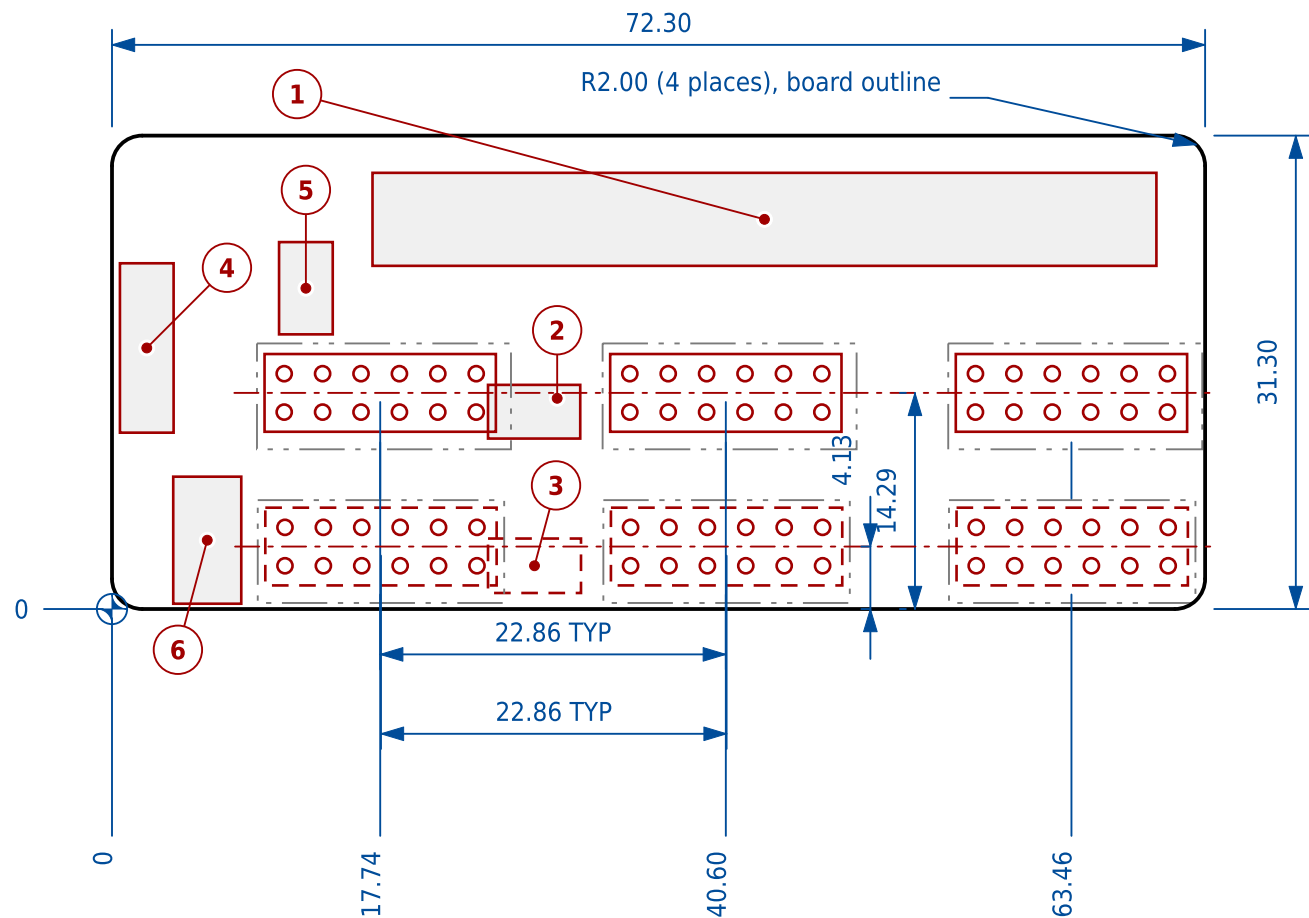

PMOD HEADERS

PORT	REF	ROLE	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
P1	J5	host	bottom	17.740	14.290	24.090	15.560
P1	J2	plug	bottom	17.790	4.130	24.140	5.400
P2	J6	host	bottom	40.600	14.290	46.950	15.560
P2	J3	plug	bottom	40.650	4.130	47.000	5.400
P3	J7	host	bottom	63.460	14.290	69.810	15.560
P3	J4	plug	bottom	63.510	4.130	69.860	5.400

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	40-way ribbon header J1 to the Raspberry Pi GPIO, 2x20 box	17.23 to 69.08	22.69 to 28.84
2	Clock and reset socket J8, 1x2	24.87 to 30.97	11.27 to 14.82
3	Clock and reset pins J9, 1x2, on the underside	24.87 to 31.02	1.06 to 4.66
4	Auxiliary socket J10, 1x4: GND, 3V3, USR_IO, USR_SW	0.53 to 4.08	11.66 to 22.86
5	Power jumper J11: Pi 3V3 to the Pmod VCC rail	11.05 to 14.60	18.16 to 24.26
6	User push button SW1, USR_SW	4.05 to 8.55	0.35 to 8.75

LEGEND

- Board outline
- Component body, scheduled
- On the underside, seen through the board
- Pmod connector body
- Dimension, extension and leader

NOTES

- Viewed from the component side.
- Not a HAT. The board stands on edge in front of a Tiny Tapeout demoboard, its three underside plugs in the demoboard's Pmod hosts and its component side facing forward; the Raspberry Pi connects by ribbon cable only.
- PLUG rows are the underside 2x6 pin headers. Their fields sit 10.16 mm below the HOST fields and 0.05 mm to the right, on the demoboard's 22.86 mm host pitch, so P1 goes into the INPUT host, P2 into BIDIR and P3 into OUTPUT.
- HOST rows J5 to J7 are vertical sockets facing out of the component side; EDGE gives the axis the columns run along, and pin 1 is the right-hand end of the upper row on both rows.
- No mounting holes: the plugs carry the board.
- The pin map, read from the same board file, is in accessories/raspmo-d-vs-pmo-d-hat.md.

SOURCES

- KiCad board file: <https://github.com/psychogenic/tinytapeout-demoboard-to-raspi> TTDB_2_Raspi.kicad_pcb @ 2c2e3db - title block: TT Demoboard To Raspi rev 1.0, dated 2024-12-14, Psychogenic Technologies; the silkscreen reads v1.1
- Purpose: <https://github.com/psychogenic/tinytapeout-demoboard-to-raspi/blob/main/README.md> - quoted: "Connects all I/O from TT demoboard to RPi ribbon cable while still allowing the PMODs to be used with external modules."
- Clock and reset: <https://github.com/psychogenic/tinytapeout-demoboard-to-raspi/blob/main/README.md> - quoted: "the clock and reset are only available through the SIL (not one of the PMODs) so these must be connected by adding a 2-pin header to the demoboard in the right spot."

RASPMOD

TT Demoboard To Raspi rev 1.0, silkscreen v1.1: a frontplate for the demoboard's three Pmod hosts

DRAWN		VERSION		UNITS		SCALE	
generated		v0.0-186-gd944fb5		mm		2:1	
SIZE	SHEET		DRAWING NO				REV
A3	1 OF 1		ACC-HAT-RMOD				A
MATERIAL			GENERAL TOLERANCE				
PCB, 1.6 nominal			edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08				