


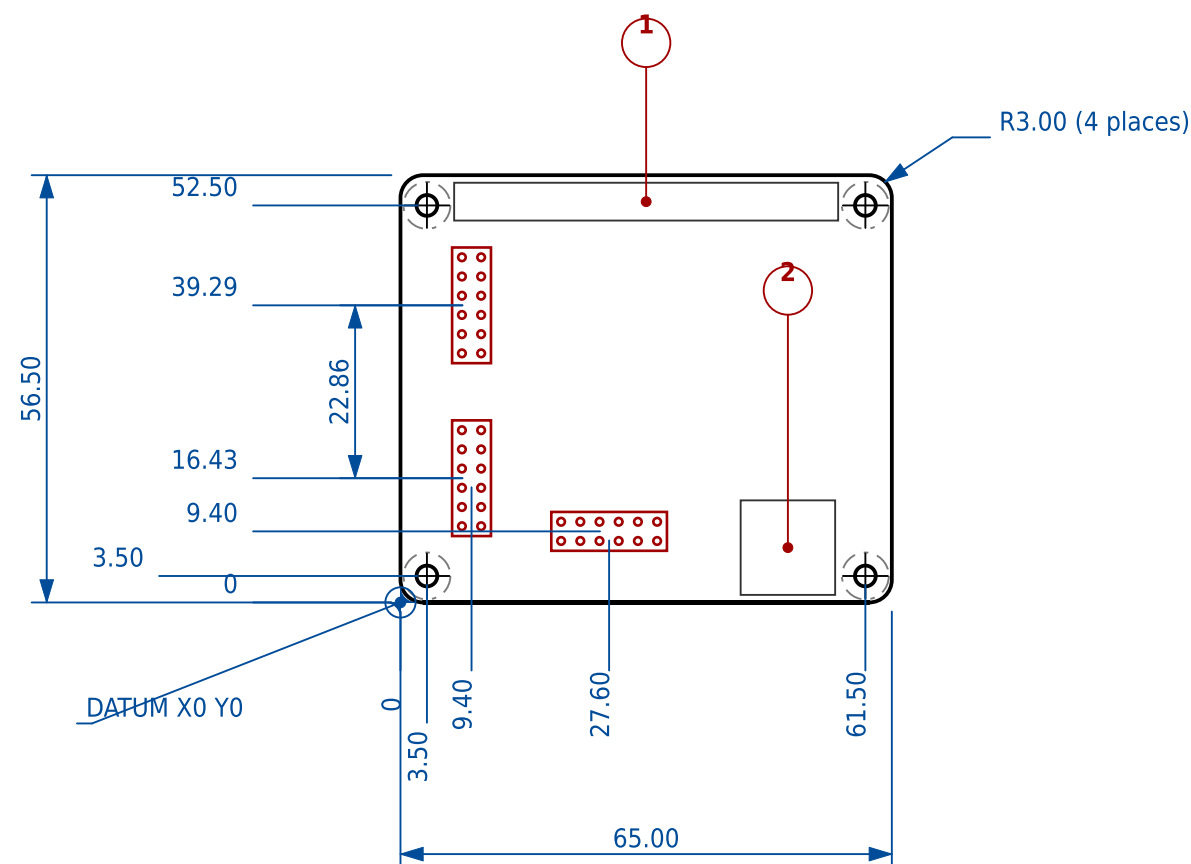

HOLE SCHEDULE

FEATURE SCHEDULE

4. Pmod host positions:
https://digilent.com/reference/_media/reference/add-ons/pmod-hat/pmod-hat-adapter-top-1000.png -
 Measured from Digilent's official top view by scripts/measure_pmod_hat.py. Digilent publish no
 dimensioned drawing for this board.

NOTES

1. All dimensions in millimetres. Datum is the lower-left corner of the board outline; X right, Y up, viewed from the component side.
2. DERIVED DIMENSIONS. Digilent publish no mechanical drawing, DXF, STEP or board file for this product. Pmod host positions were measured photogrammetrically and are good to about ± 0.75 mm.
3. JA and JB face out of the left edge, JC out of the lower edge. All three are right-angle hosts: the connector body overhangs the board edge by roughly 3 mm and the through-hole field sits about 9.4 mm in from it, so a mating Pmod peripheral plugs in from outside that edge.
4. JA and JB are snapped to the 22.86 mm host spacing the Pmod Interface Specification mandates; they measured 23.18 mm apart, inside the measurement uncertainty.

SOURCES

1. Raspberry Pi HAT mechanical specification:
<https://github.com/raspberrypi/hats-hat-board-mechanical.pdf> - 65 x 56.0 or 65 x 56.5 mm (56.5 for an SMT 40-way header), 3 mm corner radii, four 2.75 mm holes 3.5 mm in from the edges on a 58 x 49 mm rectangle.
2. Pmod Interface Specification 1.2.0:
https://digilent.com/reference/_media/reference/pmod/pmod-interface-specification-1_2_0.pdf - Digilent, revised 5 October 2017. Host ports on a common board edge are spaced .90 in (22.86 mm) centre to centre; pins are on a .10 in (2.54 mm) grid in both axes.
3. Board outline:
<https://digilent.com/reference/add-ons/pmod-hat/start> - Digilent state width 65 mm, length 56.5 mm.

DIGILENT PMOD HAT ADAPTER