ration with the experimentalists help determine the exact fittings purchased from McMaster-Carr for the corners of the loop and the reducers used to mount the heat exchanger to the facility. Using this information, a CAD model was reverse-engineered from compatible parts listed on McMaster-Carr.

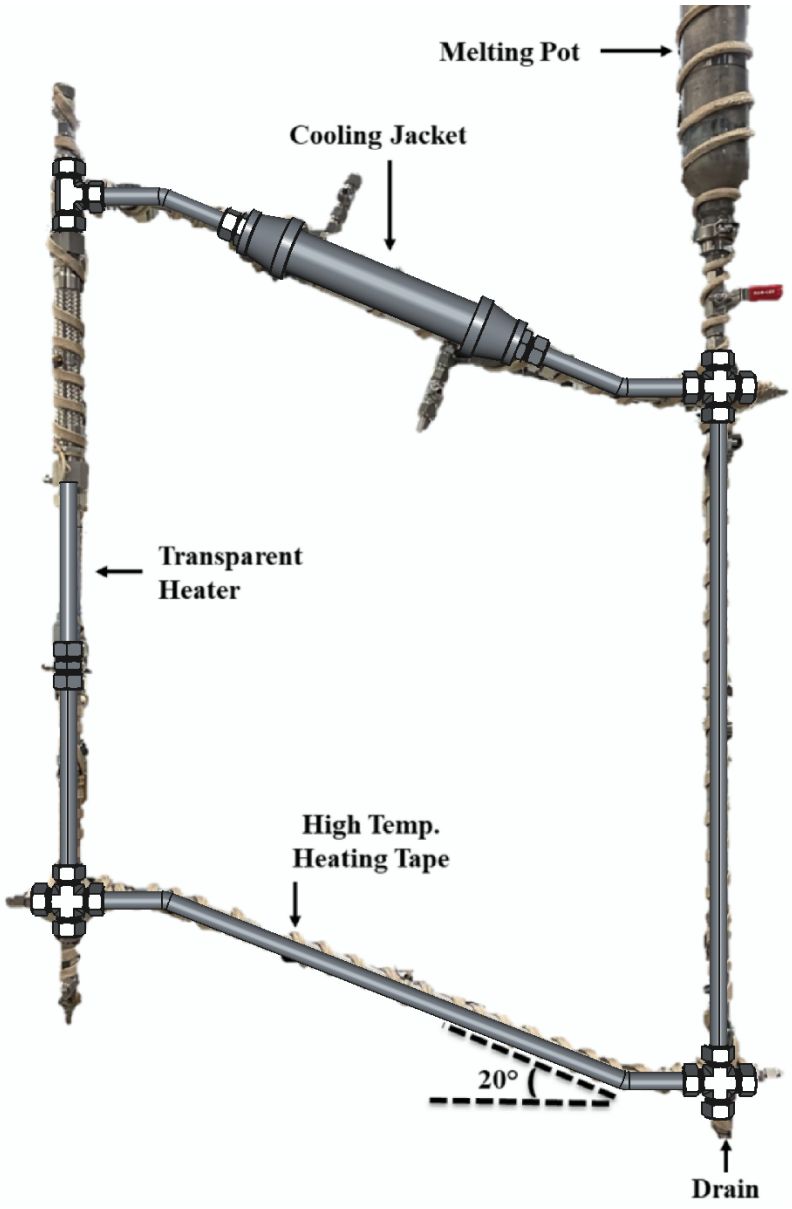


Figure 5.2: Reverse Engineered CAD Overlaid on Image of Experimental Facility.

From this effort to better understand the geometry of the facility before continuing to contingent studies such as the first order model and CFD simulation, a few items are worth