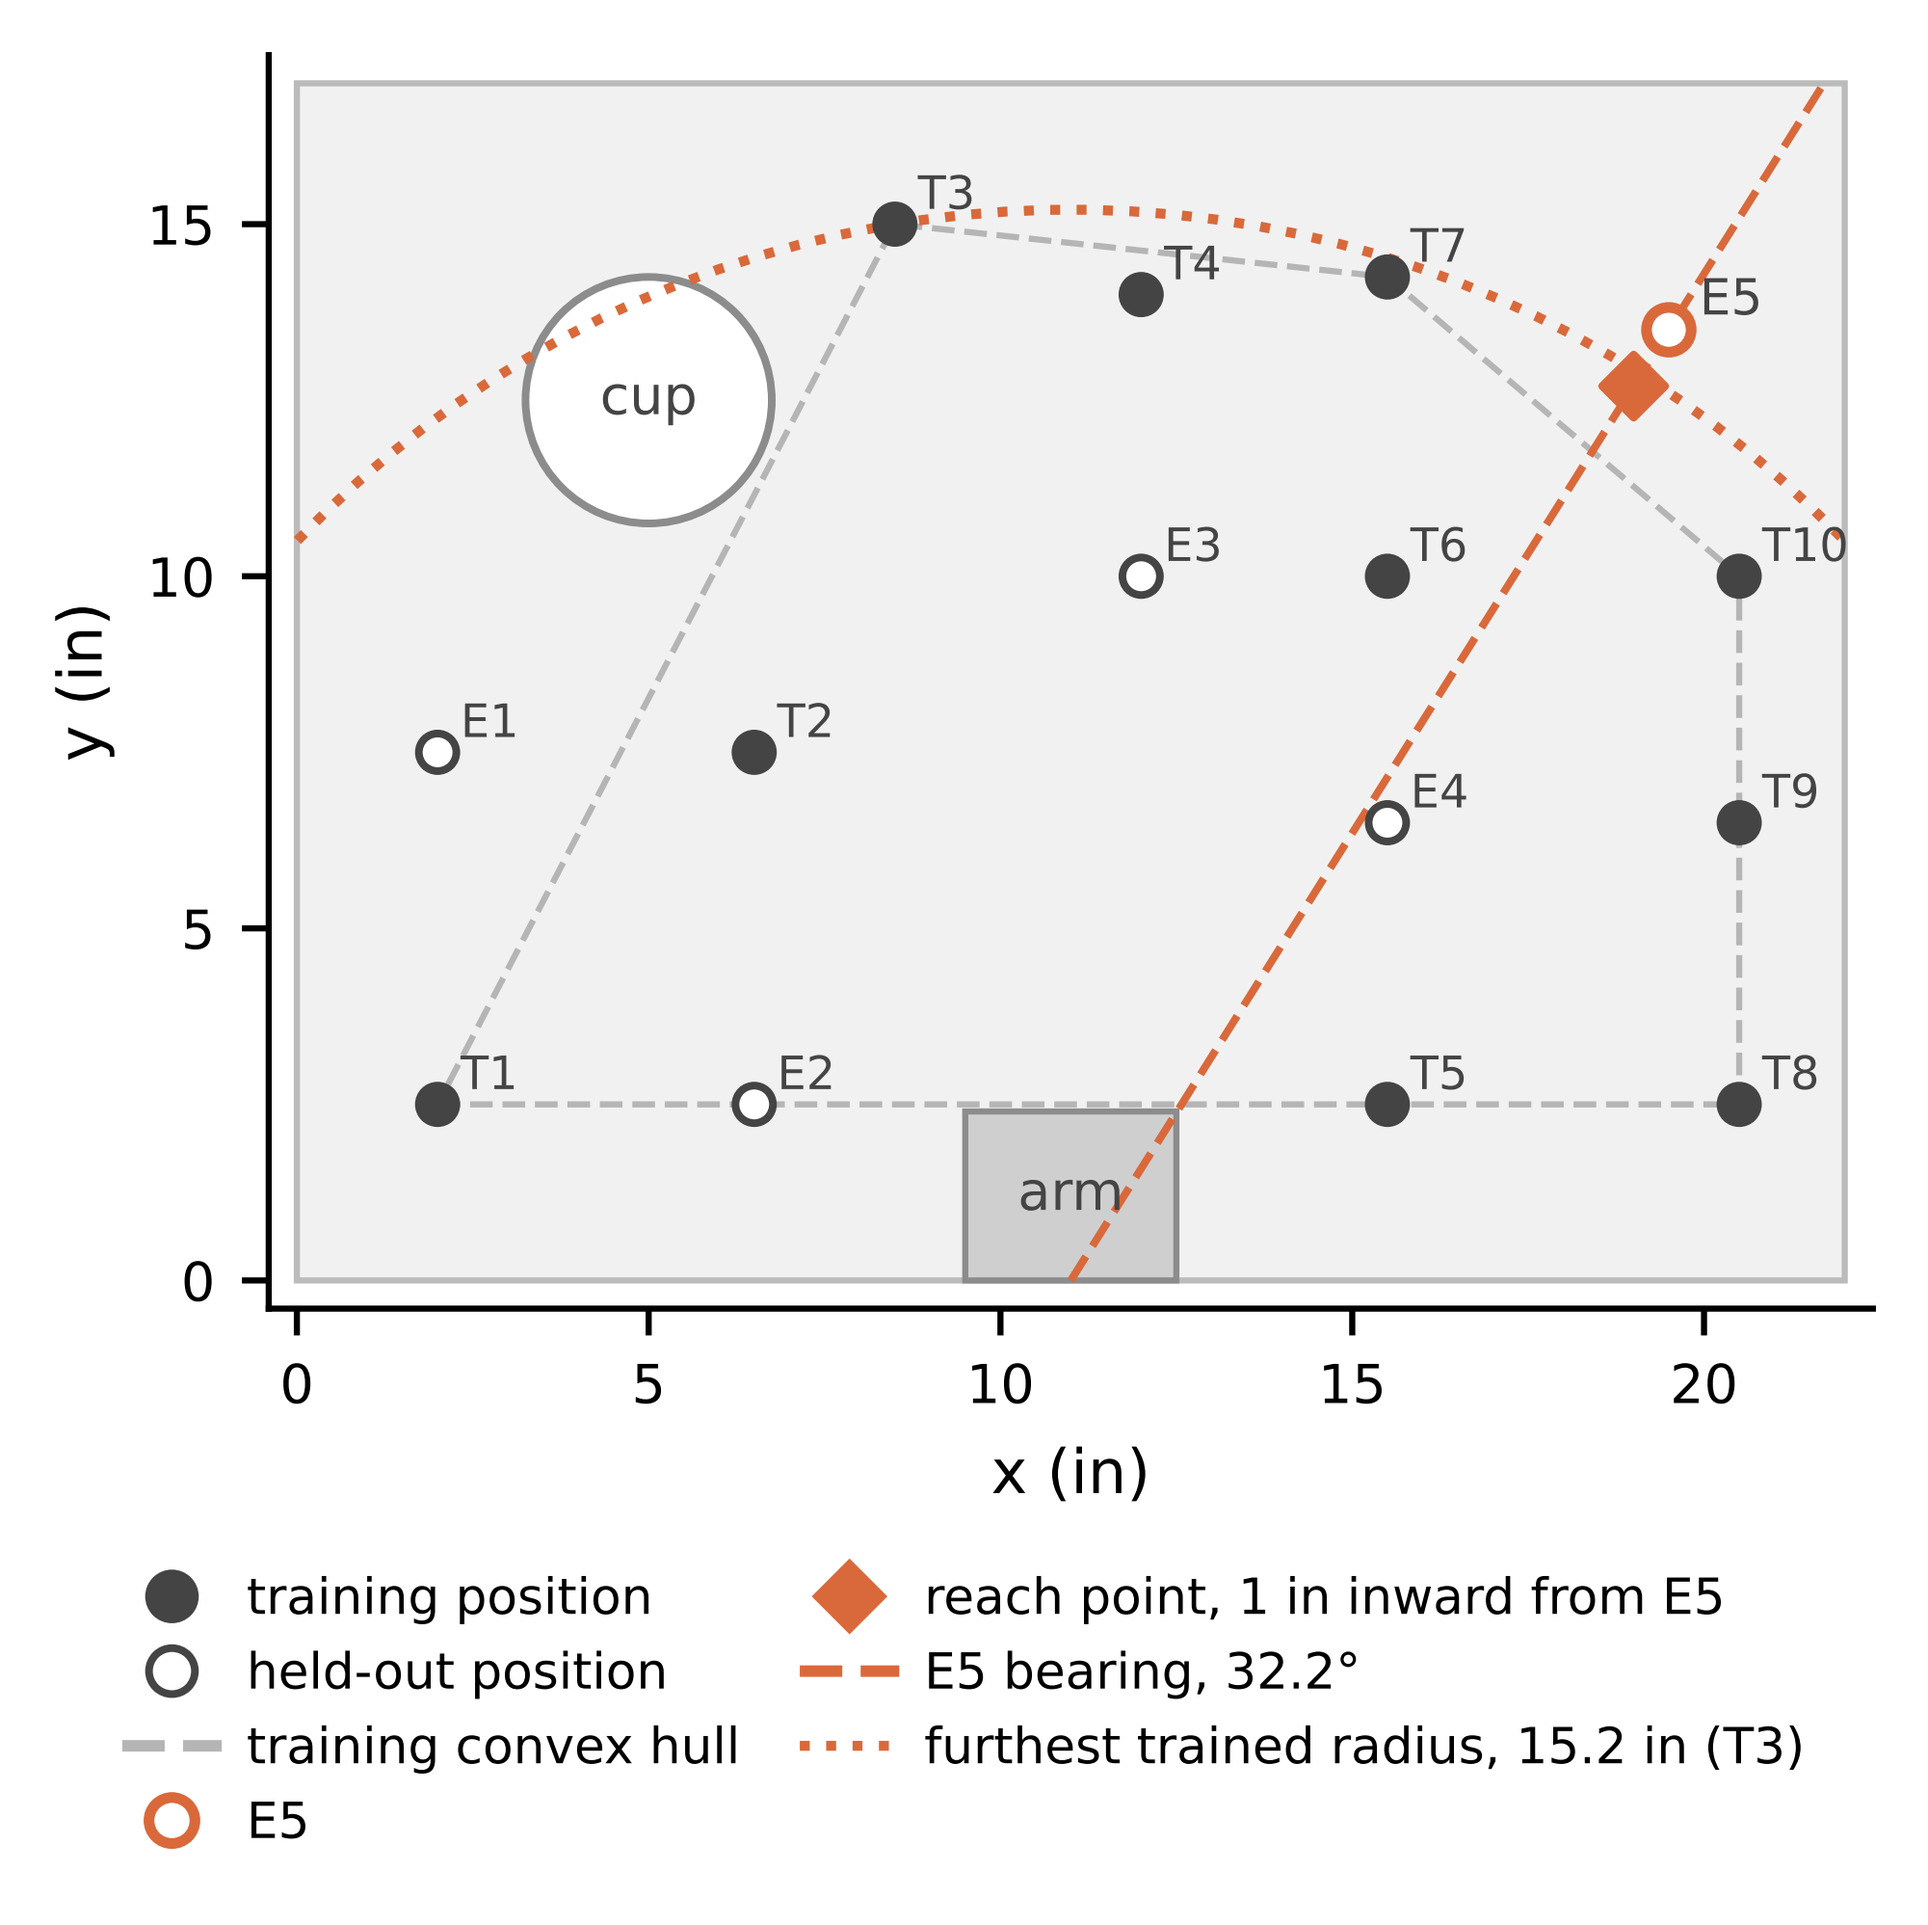
T3
T4
T7
E5
cup
E3
T6
T10
E1
T2
E4
T9
T1
E2
T5
T8
arm
15
10
5
0
y (in)
0
5
10
15
20
x (in)
training position
held-out position
training convex hull
E5
reach point, 1 in inward from E5
E5 bearing, 32.2°
furthest trained radius, 15.2 in (T3)