


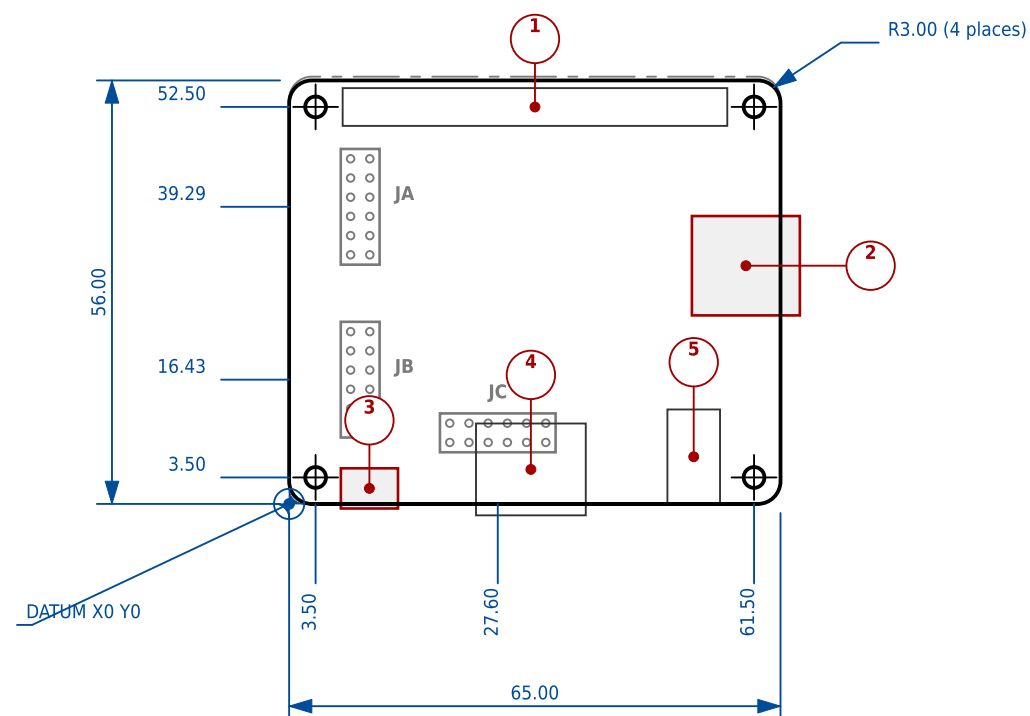

HOLE SCHEDULE

ID	X	Y	DIA	KEEPOUT
H1	3.50	3.50	2.75 +/-0.05	not given
H2	61.50	3.50	2.75 +/-0.05	not given
H3	3.50	52.50	2.75 +/-0.05	not given
H4	61.50	52.50	2.75 +/-0.05	not given

FEATURE SCHEDULE

#	FEATURE	X EXTENT	Y EXTENT
1	40-pin GPIO header	7.08 to 57.96	49.99 to 54.99
2	USB 2.0 type A (single)	53.28 to 67.56	24.93 to 38.07
3	micro-USB power input	6.84 to 14.40	-0.60 to 4.71
4	HDMI type A	24.72 to 39.24	-1.51 to 10.63
5	3.5 mm A/V jack	50.04 to 57.00	-0.02 to 12.49

PMOD HAT ADAPTER HOSTS

PORT	EDGE	CX	CY
JA	left edge	9.40	39.29
JB	left edge	9.40	16.43
JC	bottom edge	27.60	9.40

NOTES

1. All dimensions in millimetres. Datum is the lower-left corner of the board outline; X to the right, Y up, viewed from the component side.
2. Hole and Pmod positions are ordinate dimensions from that single datum, so they do not accumulate tolerance.
3. Phantom outline is the Digilent Pmod HAT Adapter fitted to the 40-pin GPIO header. Its Pmod host positions are given in this board's coordinate frame, since the adapter's mounting holes coincide with this board's.
4. Connector outlines are the component body as drawn by Raspberry Pi Ltd, including any overhang past the board edge.
5. Mounting hole diameter: Carried over from the Pi 3 Model B drawing. The 3A+ drawing gives no hole size.
6. No keep-out around the mounting holes is dimensioned on this model's own drawing. The Raspberry Pi HAT mechanical specification ([github.com/raspberrypi/hats, hat-board-mechanical.pdf](https://github.com/raspberrypi/hats/blob/master/hat-board-mechanical.pdf)) requires a 6.2 mm keep-out around each mounting hole on a board fitted to a Pi; design to that.
7. The source drawing is a reduced plot, not 1:1, so dimensions carry more uncertainty than the other models; the recovered plot scale was 1.0685.
8. Hole positions are the 3.5 mm inset and 58 x 49 mm rectangle dimensioned on this model's own drawing.
9. Pmod host JC on the Pmod HAT Adapter overhangs the lower board edge in the same region as this board's HDMI and power connectors. Digilent's own reference manual warns to fit the two standoffs opposite the 40-pin connector so that JC's pins cannot touch the HDMI shell.
10. Pmod HAT Adapter: DERIVED DIMENSIONS. Digilent publish no mechanical drawing, DXF, STEP or board file for this product. Pmod host positions were measured photogrammetrically and are good to about ± 0.75 mm.
11. Pmod HAT Adapter: JA and JB face out of the left edge, JC out of the lower edge. All three are right-angle hosts: the connector body overhangs the board edge by roughly 3 mm and the through-hole field sits about 9.4 mm in from it, so a mating Pmod peripheral plugs

SOURCES

1. Mechanical drawing; <https://datasheets.raspberrypi.com/rpi3/raspberry-pi-3-a-plus-mechanical-drawing.pdf> - Raspberry Pi Ltd
2. Pmod HAT Adapter: JA and JB are snapped to the 22.86 mm host spacing the Pmod Interface Specification mandates; they measured the mating holes; <https://datasheets.raspberrypi.com/rpi3/raspberry-pi-3-a-plus-mechanical-drawing.pdf> - Carried over from the Pi 3 Model B drawing. The 3A+ drawing gives no hole size.
3. Fabrication tolerance is not called out per dimension. Assume ± 0.20 on the routed board edge, ± 0.10 on drilled hole position and ± 0.08 on plated hole diameter unless the board house states otherwise.

RASPBERRY PI 3 MODEL A+

65 x 56 mm			
DRAWN	DATE	UNITS	SCALE
generated	2026-09-10	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	RPI-01	A