


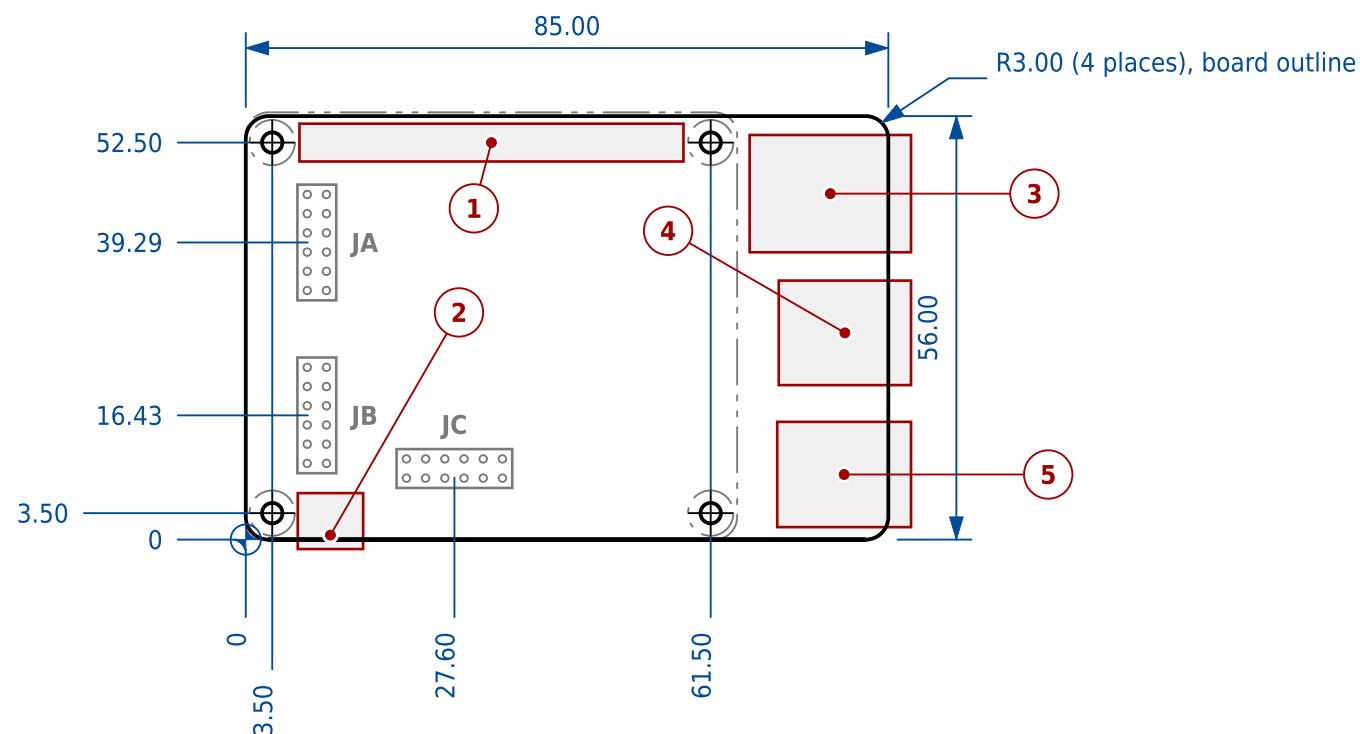

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.50	3.50	2.70	6.00
MT2	61.50	3.50	2.70	6.00
MT3	3.50	52.50	2.70	6.00
MT4	61.50	52.50	2.70	6.00

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	40-pin GPIO header	7.10 to 57.90	50.00 to 55.00
2	USB-C power input	6.88 to 15.53	-1.25 to 6.15
3	Ethernet RJ45	66.65 to 88.00	37.99 to 53.51
4	USB 3.0 type A (upper pair)	70.50 to 88.00	20.43 to 34.25
5	USB 2.0 type A (lower pair)	70.30 to 88.00	1.65 to 15.57

PMOD HAT ADAPTER HOSTS

PORT	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
JA	left edge	9.400	39.290	8.130	45.640
JB	left edge	9.400	16.430	8.130	22.780
JC	bottom edge	27.600	9.400	21.250	8.130

LEGEND

- Board outline
- Component body, scheduled
- - - Adjacent part, hole keep-out
- Dimension, extension and leader

NOTES

1. All dimensions in millimetres. The datum symbol marks the origin: the lower-left corner of the board outline, X right, Y up, viewed from the component side.
2. Phantom outline is the Digilent Pmod HAT Adapter on the 40-pin GPIO header, drawn in this board's frame: its mounting holes coincide with this board's.
3. Connector outlines are the component body as drawn by Raspberry Pi Ltd, overhang past the board edge included.
4. Hole IDs are assigned by this drawing, bottom row first then left to right, and mean the same thing on every Raspberry Pi sheet here.
5. The 40-pin GPIO header is fixed by the Raspberry Pi HAT specification and carries the same position on every Raspberry Pi sheet here. The drawings were read separately, agreed to 0.060 mm, and were snapped to one value.
6. Design mounting hole keep-outs to 6.2 mm diameter on every model: that is what the Raspberry Pi HAT specification (github.com/raspberrypi/hats) requires, and the largest figure the models themselves publish. The KEEPOUT column gives what this model's drawing shows, which is not always anything.
7. Pmod host JC on the Pmod HAT Adapter overhangs the lower board edge, where these boards carry their HDMI and power connectors. Digilent's manual warns to fit the two standoffs opposite the 40-pin connector so JC's pins cannot touch the HDMI shell. The HDMI connectors are not drawn here.

NOTES (continued)

8. Those host positions are DERIVED, not published: Digilent issue no mechanical drawing for the adapter. Good to about ± 0.75 mm. JA and JB face out of the left edge, JC out of the lower edge. The Pmod HAT Adapter sheet has the derivation.
9. Pmod host coordinates are given to three decimals, unlike the rest of this sheet. Rounded to two, adjacent hosts print 22.85 apart and contradict the 22.86 pitch dimensioned here.
10. Port names differ by family: JA, JB, JC on the adapter and Raspberry Pi sheets, by signal direction on the demo boards, PMOD 1 to 3 on the plate sheets. TT-MP-02 maps them.
11. Assembled envelope, connector overhang included, is 88.00 x 57.25 mm against a 85.00 x 56.00 mm board outline. The FEATURE SCHEDULE gives the extents.
12. GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
13. Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

SOURCES

1. Mechanical drawing:
<https://datasheets.raspberrypi.com/rpi4/raspberry-pi-4-mechanical-drawing.dxf> - Raspberry Pi Ltd
2. Mounting holes: <https://datasheets.raspberrypi.com/rpi4/raspberry-pi-4-mechanical-drawing.dxf> - Read from the DXF: hole and keep-out circles on layer 0.

RASPBERRY PI 4 MODEL B

85 x 56 mm

DRAWN generated	DATE 2026-09-10	UNITS mm	SCALE 1:1
SIZE A3	SHEET 1 OF 1	DRAWING NO RPI-02	REV A
MATERIAL PCB, thickness not stated		GENERAL TOLERANCE edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	