
Touch II

Blank Manual

Clessidra

Granular sampler, inspired by the hourglass

Firmware v0.3 · francescodimaggio.nl/clessidra

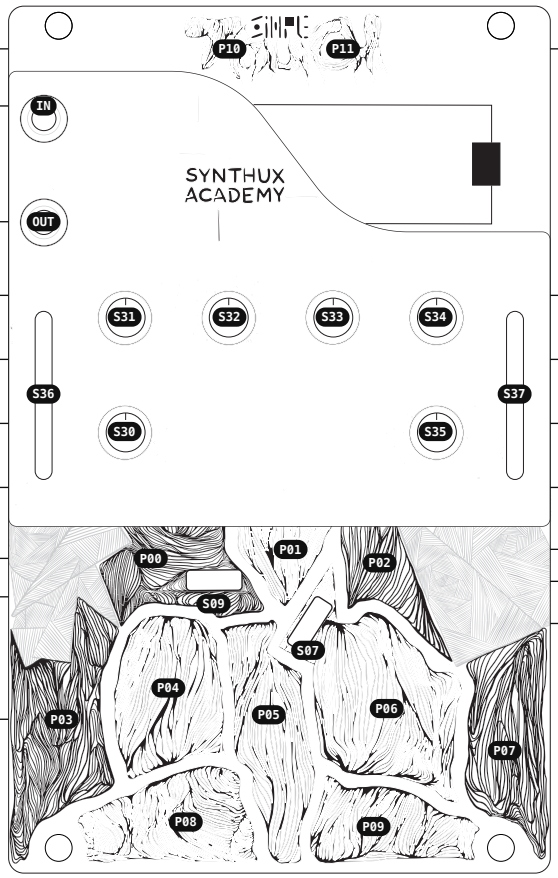

Tap: the last 8 s. Hold: up to 30 s **P10**
Listen: the input, nothing recorded

Input **IN**

Output **OUT**

Size: 5 ms – 2 s, 100 ms at the centre **S31**
Random size

Spray: scattered round the playhead **S32**
Reverse: grains read backwards

Speed 0–4×, stops at ¼ ½ 1 2 4 **S36**
Volume

Position: where the loop starts **S30**
Filter: low-pass / off / high-pass

Stop: held, slows to a halt **P00**

Forward / freeze / reverse **S09**

Slices: hold, several at once **P03–P09**

P11 Hold: the second layer, in grey

S33 Pitch ±24 semitones, musical stops
Random pitch: up free, down octaves

S34 Shape: square, decay, bell, reverse
Random shape

S37 Density: none, then 0.25–320 a second
Random timing: regular to random

S35 Length: a share of the rest
Reverb

P01 Reset: second layer to defaults

P02 Retrigger: the loop from its start

S07 End: loop / turn over / once

Grey: with P11 held. After a layer change a knob moves on from where it is, nothing jumps.

Always listening: a tap on P10 keeps what just played. Frozen by S09, Speed scrubs the loop.

LED: glow = grains, flash = recording, pulse = a stop, steady = P11 held, the twin last turned.