

114993387 | XIAO 60GHz mmWave Human Breathing and Heartbeat Sensor -MR60BHA2

SKU: 114993387

Product Overview

The MR60BHA2 Sensor Kit uses 60GHz mmWave technology to detect breathing, heartbeat, and human presence. It includes light level sensing and an RGB LED for customizable interaction, along with support for additional sensors and actuators. The kit features the XIAO ESP32C6 microcontroller with pre-flashed ESPHome firmware, enabling wireless connectivity via Wi-Fi and no-code integration with Home Assistant.

Features

Human Static Presence: Measures effectively up to 6 meters.

Breathing & Heartbeat Detection: Accurate for a single person at 1.5 meters with the device stationary. The above parameters have been tested in the empty deployment environments.

Feature 2: Powered by ESP32 & ESPHome & No-Code Integration with Home Assistant The kit features a Seeed Studio XIAO ESP32C6 with pre-flashed ESPHome firmware, enabling seamless plug-and-play integration with Home Assistant. Configure the device in ESPHome, and no-code setup for Home Assistant in 1-2 minutes.

Feature 3: Ambient Light Sensing for Responsive Automation The mmWave sensor module includes a BH1750 light sensor, offering precise ambient light detection from 1 to 65,535 lux, with adjustable measurements up to 100,000 lux. Supported by ESPHome and Arduino IDE, it allows you to collect ambient light readings as frequently as every second, enhancing your automation's responsiveness to environmental changes.

Feature 4: Customizable Interaction This 60GHz mmWave Sensor Module is equipped with a WS2812 RGB LED, allowing for DIY customization of the indicator light.

Feature 5: Extended Sensing or Automation with Grove We've added one additional Grove Connector to the mmWave Module for easy expansion with your own Grove sensors and actuators (e.g., PIR and Relay). Choose from over 300 compatible Grove Modules!

Feature 6: Open Source 3D Printed Enclosure To simplify deployment, we offer a 3D printed enclosure available for free download, providing a starting point to customize your casing design.

Feature 7: Open for Customization Want to tailor-make the kit to fit your unique applications? For more information about 3D point cloud data generation and interference zone configuration when customizing mmWave modules. Seeed provides one-stop R&D customization and manufacturing services for fast development from concept to production. Contact us at iot@seeed.cc to learn more.

Product Image



Product image

Specifications

General Parameters:

mmWave Firmware: Breathing and Heartbeat Detection

Detection Range: Human Static Presence Detection: up to 6 Meters Breathing and Heartbeat Detection: 1.5 Meters

MCU: Seeed Studio XIAO ESP32C6

LED: WS2812 RGB LED

Button: Rest

Light Sensor: BH1750 Range: 1 to 65,535 lux with adjustable measurements up to 100,000 lux

Grove Connector: 1 GPIO Port ● D0 ● D10

Pin Header Spacing: 2.54mm

Power Supply: 5V/1A

Power consumption: 0.5w: Standby Mode 0.8w: Activation Mode 1.4w: Work with Grove Relay status


Seeed Technology Co.,Ltd.

9F, Building G3, International E City,
Zhongshanyuan Road,
Nanshan, Shenzhen, China

Contact:

Tel: +86 0755-80695676
Web: www.seeed.cc
Shop: www.seeedstudio.com

Hardware Overview

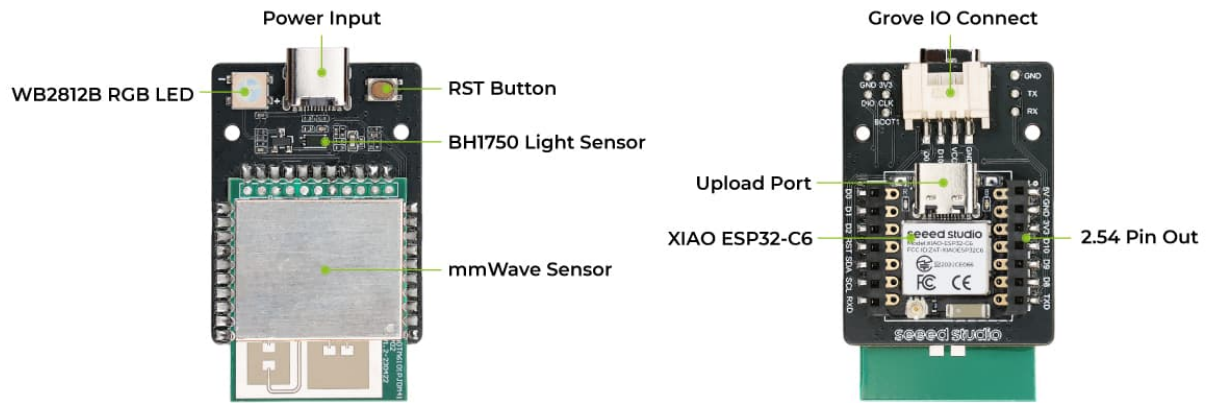

Hardware overview image