


規制番号 名称		26-0221	造賀(東)		運 用	2014年6月19日		製造番号	K0000002	
制御機機種		交通信号制御機		EC5453S+34001001	開始日時	10時00分	～	製造年月	2014年3月	
警交仕規第1012号版3		製作所	日本信号株式会社		作動時間	終日		施工会社	(株)長沼電業社	
署別	東広島	付加機能	系統						新型錠	

2014年6月19日 確認

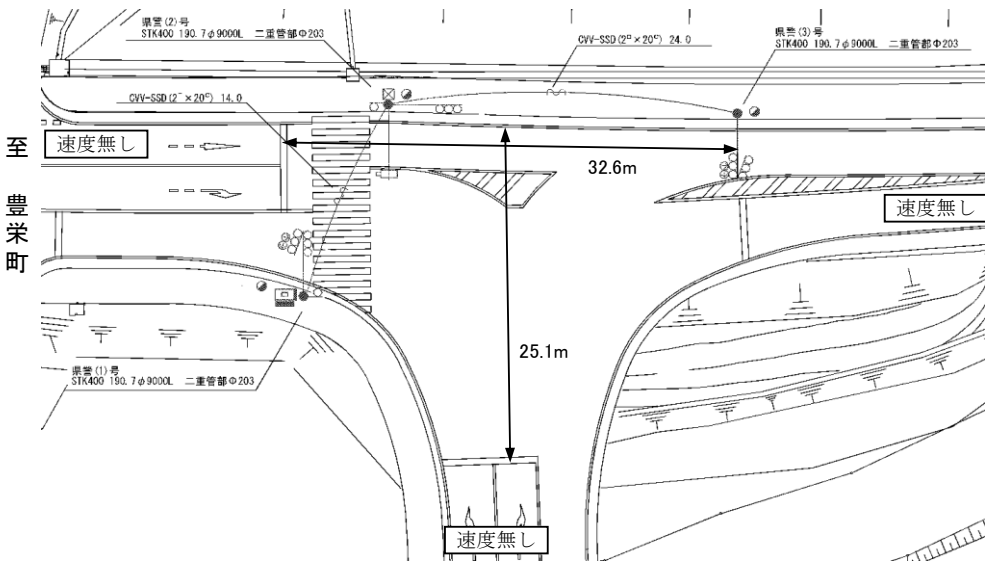

EC5450S-5320
PD1219A V2.00
至 八本松町

ステップ番号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ステップ名称	1PG	1PW	1G	1Y	2G	2Y	2R	3PG	3PW	3G	3Y	3R								
流動図																				
1P [1P]																				
1 [1V]																				
2 [2V]																				
2直矢 [1A]																				
2右矢 [2A]																				
3P [3P]																				
3 [3V]																				
パターン																			周期	オフセット 秒
保安	44	5	2	3	8	2	3	20	5	2	3	3							100	
P0																			0	
P1	21	5	2	3	5	2	3	16	5	2	3	3							70	15
P2	31	5	2	3	5	2	3	16	5	2	3	3							80	13
P3	41	5	2	3	5	2	3	16	5	2	3	3							90	6
P4	44	5	2	3	8	2	3	20	5	2	3	3							100	14
P5	42	5	2	3	5	2	3	25	5	2	3	3							100	15
P6	57	5	2	3	5	2	3	20	5	2	3	3							110	0
P7	67	5	2	3	5	2	3	20	5	2	3	3							120	0
P8	77	5	2	3	5	2	3	20	5	2	3	3							130	0
P9	87	5	2	3	5	2	3	20	5	2	3	3							140	0
PA	97	5	2	3	5	2	3	20	5	2	3	3							150	0
最長時間(秒)	110	110	110	10	110	10	10	110	110	110	10	10								
最短時間(秒)	6	0.95	0.95	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95								
AB出力	A	B	B	B	B	B	B	B	A	A	A	A								

[illegible]