


規制番号 名称		01-1093	西原4丁目		運 用	2012年2月28日		製造番号	K0000008	
制御機機種		交通信号制御機(UC形)	EC5450F+34001001		開始日時	2時50分	～	製造年月	2012年2月	
警交仕規1012号版2		製作所	日本信号株式会社	作動時間	終日			施工会社	エビス電工(株)	
署別	安佐南	付加機能	連動子機						新型錠	

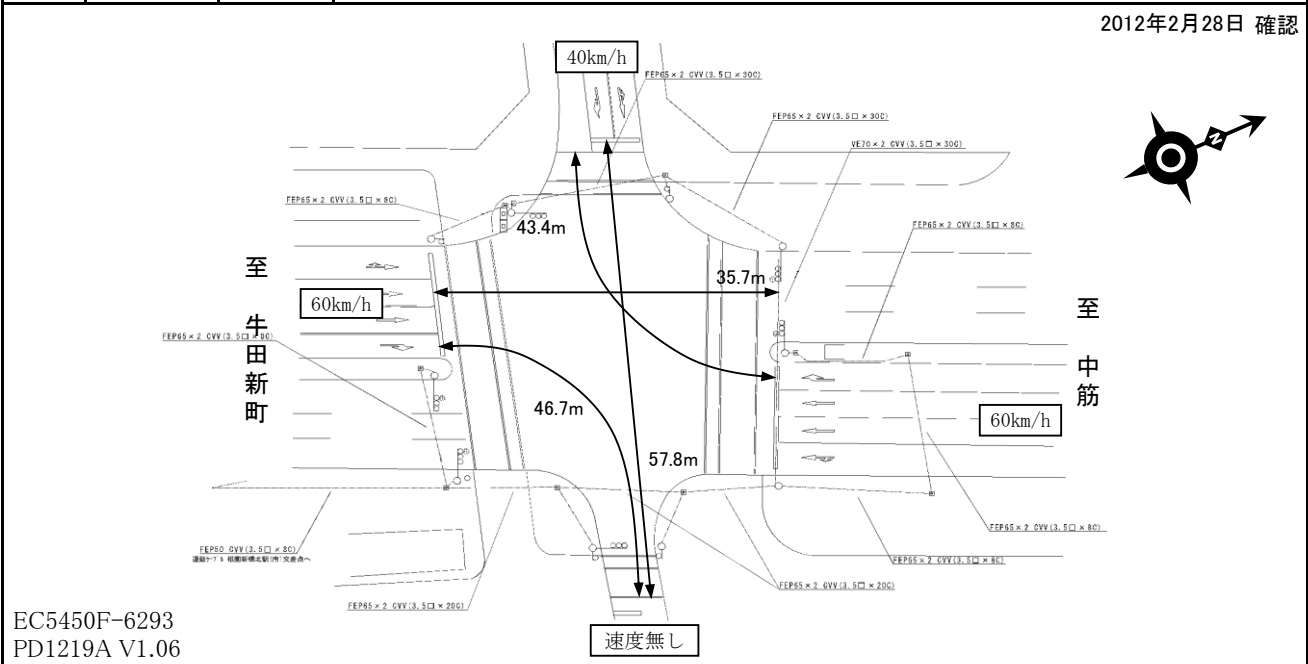

ステップ番号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ステップ名称	1PG	1PW	1G	1Y	1A	1Y	1R	2PG	2PW	2G	2Y	2R								
流動図	11.9 歩灯2 6.3m								歩灯2 28.5m 歩灯2 28.5m											
	1P [1P]																			
	1 [1V]																			
	1A [1A]																			
	2P [2P]																			
	2P [2V]																			
																				周期 オフセット 秒
パターン																				
保安	86	5	2	3	10	2	3	29	10	2	3	5								
P0																				
P1	31	5	2	3	5	2	3	29	10	2	3	5								
P2	51	5	2	3	5	2	3	29	10	2	3	5								
P3	68	5	2	3	8	2	3	29	10	2	3	5								
P4	88	5	2	3	8	2	3	29	10	2	3	5								
P5	86	5	2	3	10	2	3	29	10	2	3	5								
P6	96	5	2	3	10	2	3	29	10	2	3	5								
P7	96	5	2	3	10	2	3	29	10	2	3	5								
P8	96	5	2	3	10	2	3	29	10	2	3	5								
P9	96	5	2	3	10	2	3	29	10	2	3	5								
PA	96	5	2	3	10	2	3	29	10	2	3	5								
最長時間(秒)	110	110	110	10	110	10	10	110	110	110	10	10								
最短時間(秒)	6	0.95	0.95	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95								
AB出力	A	B	B	B	B	B	B	B	A	A	A	A								

パ タ ン 切 替	(1) 平日			(2) 土曜			(3) 日曜			(4)特殊日1			(5)特殊日2			(6)特殊日3			(7)特殊日4		
	切替 番号	時	分	ハタ 番号	時	分	ハタ 番号	時	分	ハタ 番号	時	分	ハタ 番号	時	分	ハタ 番号	時	分	ハタ 番号		
	1	0	00	1	0	00	1	0	00	1											
	2	6	00	3	6	00	3	7	00	2											
	3	7	00	4	7	00	4	9	00	3											
	4	9	00	3	9	00	3	20	00	2											
	5	17	00	5	17	00	5														
	6	19	00	3	19	00	3														
	7	22	00	2	22	00	2														
	8																				
9																					
A																					
動 作 切 替	連動子機	00:00～00:00			00:00～00:00			00:00～00:00													