


規制番号 名称		01-1491 01-1581	広島はつかいち大橋東詰(北) 広島はつかいち大橋東詰(南)		運 用	2026年3月29日		製造番号	K0000001	
制御機種機種		交通信号制御機(多段系統式)		EC6710C+34001001		開始日時	6時12分	～	製造年月	2026/2
警交仕規第1012号版6		製作所	日本信号株式会社		作動時間	終日		施工会社	伸和工業(有)	
署別	佐伯	付加機能	系統							新型錠

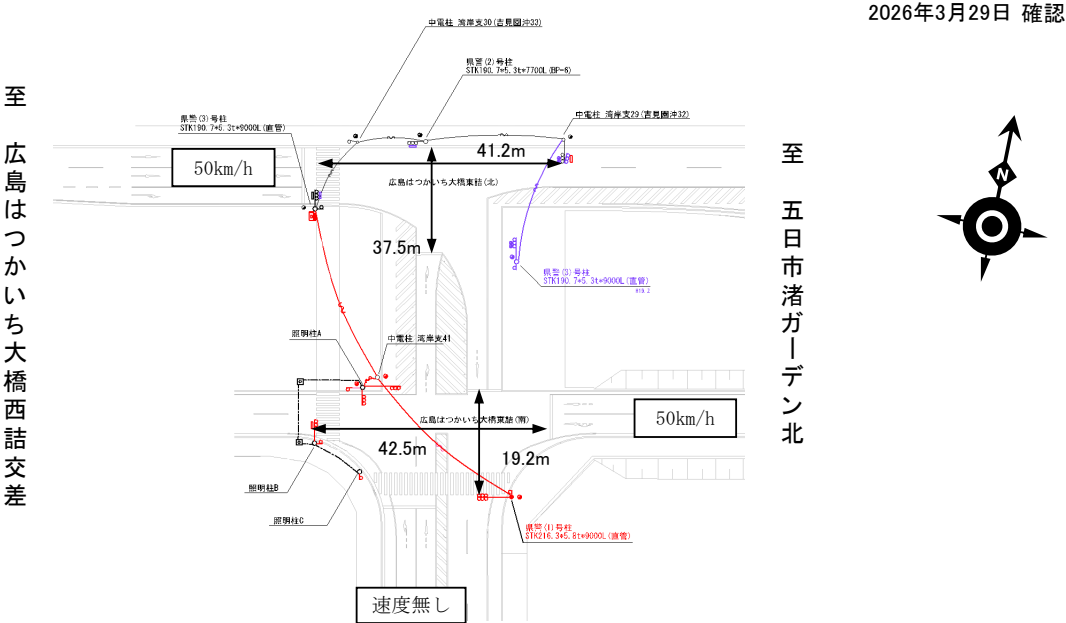

EC6710C-26346
PD1219A V3.02

ステップ番号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ステップ名称	1PG	1PW	1G	1Y	1R	2G	2Y	2R	3PG	3PW	3G	3Y	3R							
流動図														広島はつかいち大橋東詰(北) 広島はつかいち大橋東詰(南)						
1P [1P]																				
3 [3V]																				
1 [1V]																				
4 [4V]																				
2P [2P]																				
2 [2V]																				
パターン																			周期	オフセット 秒
保安	87	8	2	3	2	12	3	3	17	5	2	3	3						150	
P0																			0	
P1	29	8	2	3	2	10	3	3	17	5	2	3	3						90	88
P2	37	8	2	3	2	12	3	3	17	5	2	3	3						100	96
P3	47	8	2	3	2	12	3	3	17	5	2	3	3						110	105
P4	57	8	2	3	2	12	3	3	17	5	2	3	3						120	115
P5	67	8	2	3	2	12	3	3	17	5	2	3	3						130	125
P6	77	8	2	3	2	12	3	3	17	5	2	3	3						140	0
P7	87	8	2	3	2	12	3	3	17	5	2	3	3						150	0
P8	87	8	2	3	2	12	3	3	17	5	2	3	3						150	0
P9																			0	0
PA																			0	0
最長時間(秒)	110	110	110	10	110	10	10	10	110	110	110	10	10							
最短時間(秒)	6	0.95	0.95	0.95	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95							
AB出力	A	B	B	B	B	B	B	B	B	A	A	A	A							

パターン切替		(1) 平日			(2) 土曜			(3) 日曜			(4)特殊日1			(5)特殊日2			(6)特殊日3			(7)特殊日4		
	切替 番号	時	分	ハタ 番号	時	分	ハタ 番号	時	分	ハタ 番号	時	分	ハタ 番号	時	分	ハタ 番号	時	分	ハタ 番号	時	分	ハタ 番号
	1	6	00	4	6	00	4	6	00	2												
	2	6	30	7	7	00	7	9	00	6												
	3	9	00	4	9	00	6	14	00	8												
	4	16	00	6	15	00	8	19	00	4												
	5	19	00	4	19	00	4	20	00	3												
	6	20	00	3	20	00	3	21	00	1												
	7	21	00	1	21	00	1															
	8																					
9																						
A																						
動作切替	系統	00:00～00:00			00:00～00:00			00:00～00:00														