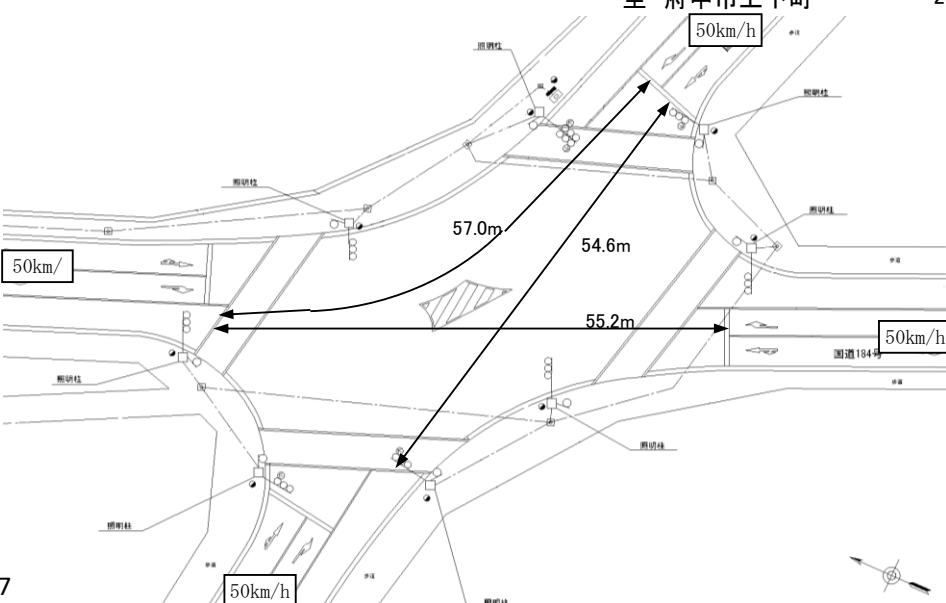






規制番号 名称		19-0018	本郷				運 用		2022年11月28日			製造番号		K0000005						
制御機種		交通信号制御機(多段系統式)				EC6050K+34001001				開始日時		16時30分	～	製造年月		2022年10月				
警交仕規第1012号版4		製作所		日本信号株式会社		作動時間		終日					施工会社		(株)瀬戸内電業社					
署別		世羅		付加機能		系統		新型錠												
至 府中市上下町 2022年11月28日 確認 50km/h 57.0m 54.6m 55.2m 50km/h 50km/h 50km/h 至 三原市吉舎町 至 三原市久井町 至 三原市大和町 																				
ステップ番号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ステップ名称	1PG	1PW	1G	1Y	1R	2PG	2PW	2G	2Y	2A	2Y	2R								
流動図																				
	1P [1P]																			
	1 [1V]																			
	2P [2P]																			
	2 [2V]																			
	2A [2A]																			
パターン													周期	オフセット秒						
保安	40	6	2	3	4	41	6	2	3	8	2	3						120	/	
P0																		0	/	
P1	18	6	2	3	4	16	6	2	3	5	2	3						70	40	
P2	21	6	2	3	4	20	6	2	3	8	2	3						80	5	
P3	31	6	2	3	4	20	6	2	3	8	2	3						90	15	
P4	31	6	2	3	4	30	6	2	3	8	2	3						100	0	
P5	41	6	2	3	4	40	6	2	3	8	2	3						120	34	
P6																		0		
P7																		0		
P8																		0		
P9																		0		
PA																		0		
最長時間(秒)	110	110	110	10	10	110	110	110	10	110	10	10								
最短時間(秒)	6	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95	0.95	0.95								
AB出力	A	B	B	B	B	B	A	A	A	A	A	A								

パターン切替		(1) 平日			(2) 土曜			(3) 日曜			(4)特殊日1			(5)特殊日2			(6)特殊日3			(7)特殊日4		
	切替 番号	時	分	ハタ 番号	時	分	ハタ 番号	時	分	ハタ 番号	時	分	ハタ 番号	時	分	ハタ 番号	時	分	ハタ 番号	時	分	ハタ 番号
	1	6	00	2	6	00	2	6	00	2	6	00	2									
	2	7	00	5	7	00	5	7	00	4	7	00	4									
	3	9	00	4	9	00	4	8	00	5	19	00	2									
	4	16	00	5	16	00	5	19	00	2												
	5	18	00	4	18	00	4															
	6	19	00	2	19	00	2															
	7																					
	8																					
9																						
A																						
動作切替	系統	00:00～00:00			00:00～00:00			00:00～00:00			00:00～00:00											

分 周 期 連 動 機 能 定 数	実行しきい値	
	連動パターン	