


規制番号 名称		26-0154	上保田			運 用	2010年8月5日		製造番号	K0000009	
制御機種種		UC形		EC5450C			開始日時	13時00分	～	製造年月	2010年7月
警交仕規232号版3		製作所	日本信号株式会社		作動時間	終日			施工会社	(株)長沼電業社	
署別	東広島	付加機能	系統								新型錠

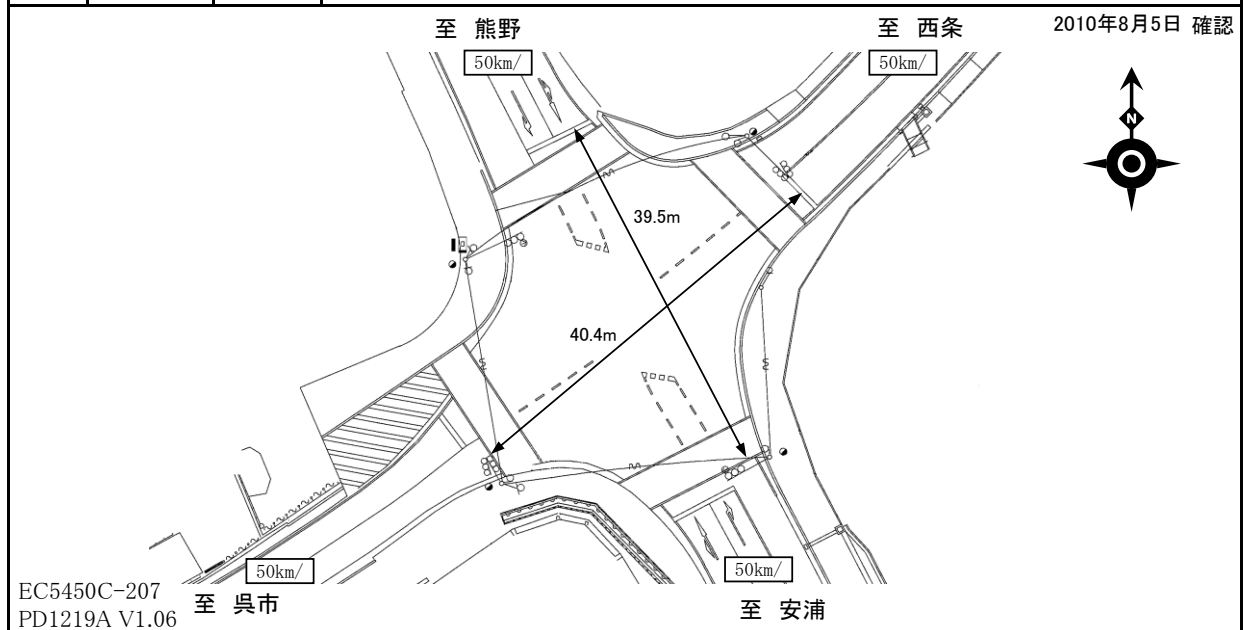

ステップ番号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ステップ名称	1PG	1PW	1G	1Y	1R	2PG	2PW	2G	2Y	2A	2Y	2R								
流動図																				
	1P [1P]																			
	1 [1V]																			
	2P [2P]																			
	2 [2V]																			
2A [2A]																				
パターン																		周期	オフセット 秒	
保安	61	5	2	3	3	21	5	2	3	10	2	3						120		
P0																		0		
P1	20	5	2	3	3	18	5	2	3	4	2	3						70	5	
P2	45	5	2	3	3	21	5	2	3	6	2	3						100	7	
P3	61	5	2	3	3	21	5	2	3	10	2	3						120	10	
P4	71	5	2	3	3	21	5	2	3	10	2	3						130	0	
P5	81	5	2	3	3	21	5	2	3	10	2	3						140	0	
P6	91	5	2	3	3	21	5	2	3	10	2	3						150	0	
P7	91	5	2	3	3	21	5	2	3	10	2	3						150	0	
P8	91	5	2	3	3	21	5	2	3	10	2	3						150	0	
P9	91	5	2	3	3	21	5	2	3	10	2	3						150	0	
PA	91	5	2	3	3	21	5	2	3	10	2	3						150	0	
最長時間(秒)	110	110	110	10	10	110	110	110	10	110	10	10								
最短時間(秒)	6	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95	0.95	0.95								
AB出力	A	B	B	B	B	B	A	A	A	A	A	A								

パターン切替		(1) 平日			(2) 土曜			(3) 日曜			(4)特殊日1			(5)特殊日2			(6)特殊日3			(7)特殊日4		
	切替番号	時	分	ハタシ番号	時	分	ハタシ番号	時	分	ハタシ番号	時	分	ハタシ番号	時	分	ハタシ番号	時	分	ハタシ番号	時	分	ハタシ番号
	1	6	00	3	6	00	3	6	00	1												
	2	19	00	2	19	00	2	9	00	2												
	3	21	00	1	21	00	1	16	00	3												
	4							19	00	2												
	5							21	00	1												
	6																					
	7																					
8																						
9																						
A																						
動作切替	系統	00:00～00:00			00:00～00:00			00:00～00:00														