


規制番号 名称		07-0724	福山北警察署入口		運 用	2017年4月19日		製造番号	Y075002
制御機種		UC形		EC5350G		開始日時	14時25分	～	製造年月
警交仕規232号版2		製作所	日本信号株式会社		作動時間	終日		施工会社	大亜工業(株)
署別	福山北	付加機能	系統 高齢者感応						





2011年3月22日 確認

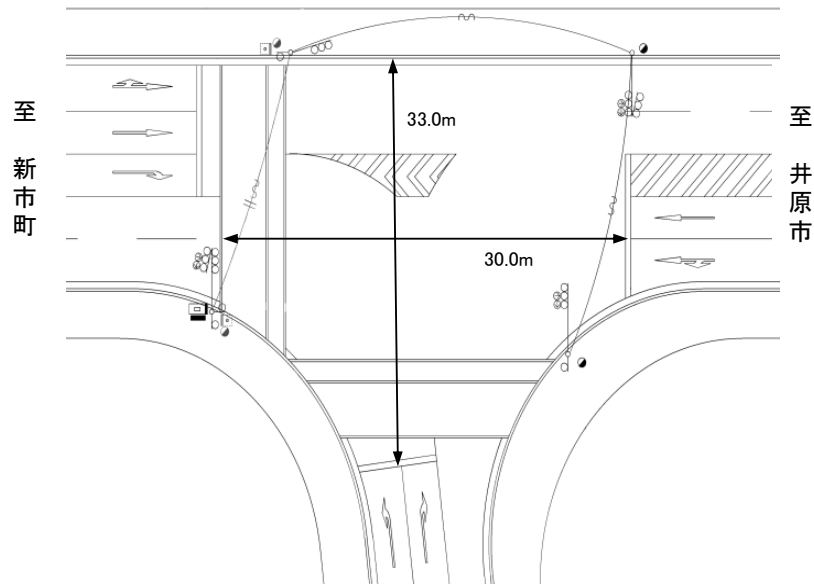

至 福山北警察署

ステップ番号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ステップ名称	1PG	1PW	1G	1Y	1A	1Y	1R	2PG	2PW	2G	2Y	2R								

流動図



1P [1P]																				
1 [1V]																				
2 [1G]																				
2 [2Y/R]																				
2直矢 [2P]																				
2右矢 [2G]																				
3P [3P]																				
3 [3V]																				
パターン																			周期	オフ秒
保安	50	5	15	3	19	2	3	17	6	4	3	3							130	
P0																			9	
P1	48	5	2	3	6	2	3	17	6	2	3	3							100	10
P2	49	5	5	3	12	2	3	17	6	2	3	3							110	13
P3	35	5	15	3	16	2	3	17	6	2	3	3							110	13
P4	36	5	15	3	12	2	3	17	6	5	3	3							110	13
P5	60	5	5	3	11	2	3	17	6	2	3	3							120	23
P6	44	5	15	3	17	2	3	17	6	2	3	3							120	23
P7	37	5	15	3	10	2	3	23	6	10	3	3							120	23
P8	73	5	5	3	8	2	3	17	6	2	3	3							130	16
P9	50	5	15	3	19	2	3	17	6	4	3	3							130	16
PA	39	5	15	3	18	2	3	23	6	10	3	3							130	16
最長時間(秒)	110	110	110	10	110	10	10	110	110	110	10	10								
最短時間(秒)	6	0.95	0.95	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95								
AB出力	A	B	B	B	B	B	B	B	A	A	A	A								

パターン切替		(1) 平日			(2) 土曜			(3) 日曜			(4) 特殊日1			(5) 特殊日2			(6) 特殊日3			(7) 特殊日4		
	切替番号	時	分	ハタ番号	時	分	ハタ番号	時	分	ハタ番号	時	分	ハタ番号	時	分	ハタ番号	時	分	ハタ番号	時	分	ハタ番号
	1	6	00	1	6	00	1	6	00	1												
	2	7	00	8	7	00	6	9	00	3												
	3	9	00	3	11	00	9	10	00	6												
	4	11	00	6	15	00	10	11	00	9												
	5	15	00	10	19	00	4	15	00	10												
	6	19	00	4	20	00	1	19	00	4												
	7	20	00	1				20	00	1												
8																						
9																						
A																						
動作切替	系統	00:00～00:00			00:00～00:00			00:00～00:00														
	交通弱者	00:00～00:00			00:00～00:00			00:00～00:00														