
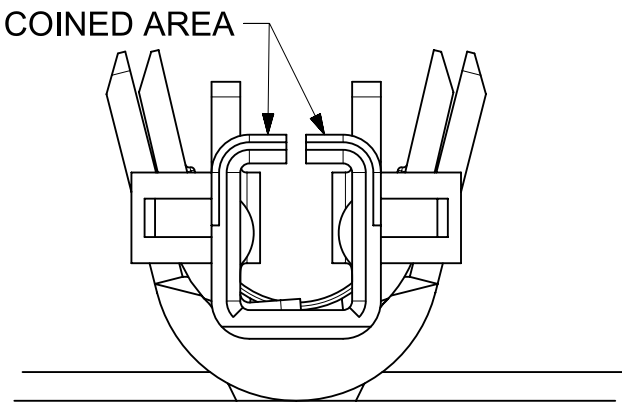
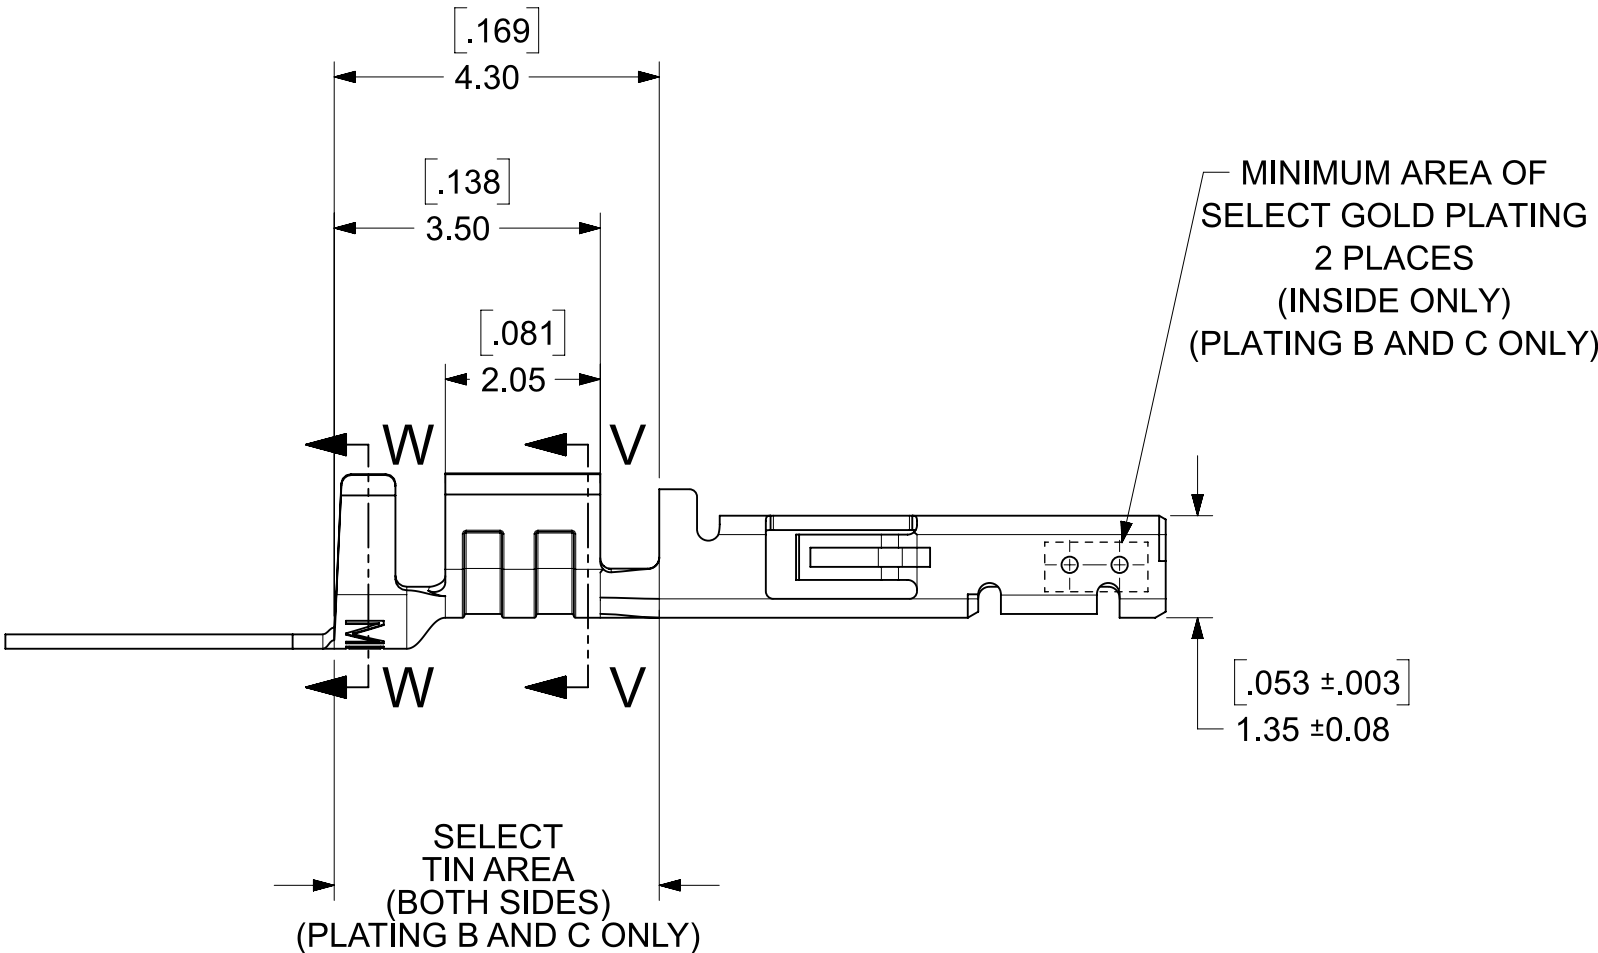
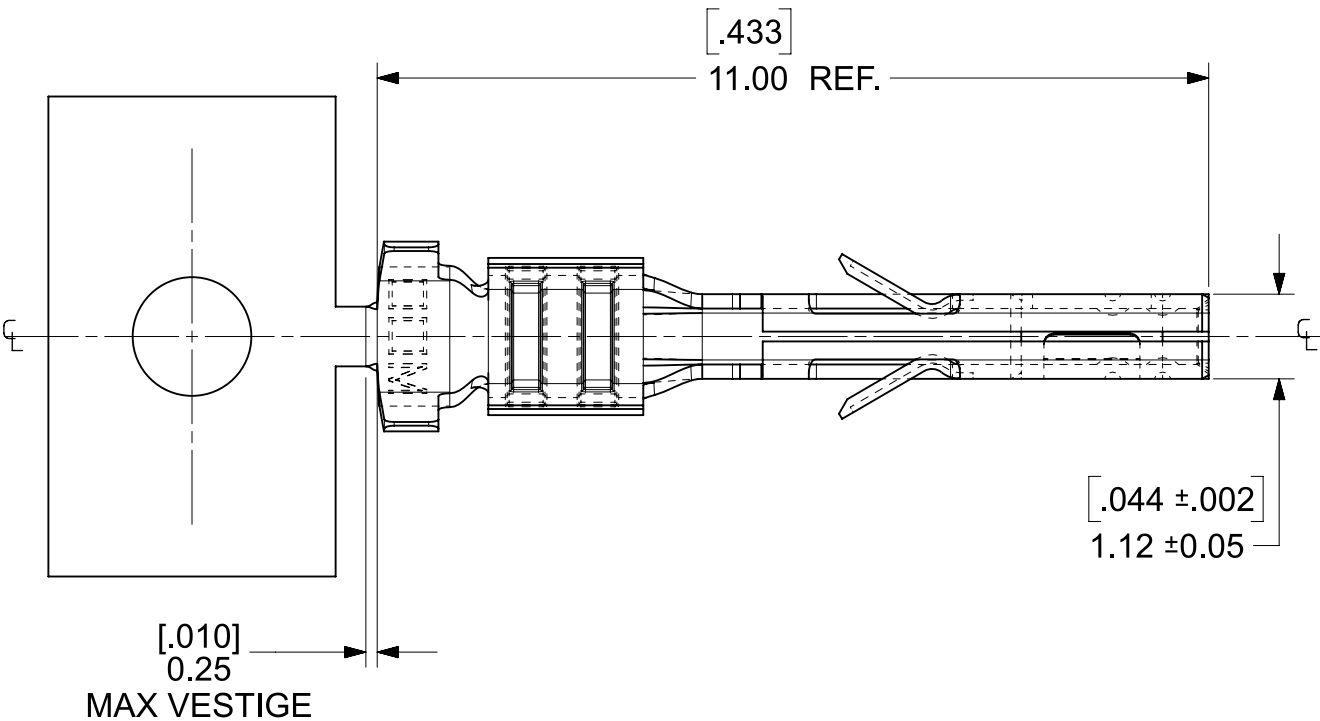
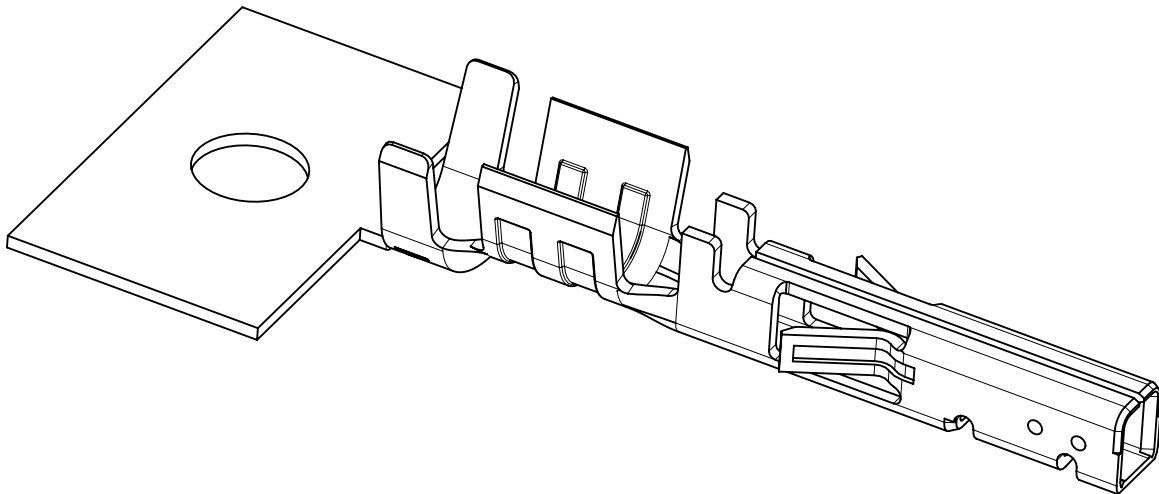


12		11		10		9		8		7		6	
WIRE SIZE	MAX INSULATION	"A"	"C"	"D"	"E"	"G"	"H"						
		$\frac{\pm.012}{\pm0.30}$	$\frac{\pm.012}{\pm0.30}$	$\frac{\pm.005}{\pm0.13}$	$\frac{\pm.012}{\pm0.30}$	$\frac{\pm.005}{\pm0.13}$	$\frac{\pm.012}{\pm0.30}$						
20-24	.073/1.85	.091/2.31	.099/2.51	.030/0.76 R.	.075/1.91	.025/0.64 R.	.082/2.08						
26-30	.050/1.27	.075/1.91	.083/2.10	.025/0.64 R.	.058/1.47	.020/0.51 R.	.065/1.65						
18 OR 0.75mm²	.073/1.85	.091/2.31	.099/2.51	.030/0.76 R.	.086/2.18	.029/0.74 R.	.094/2.39						

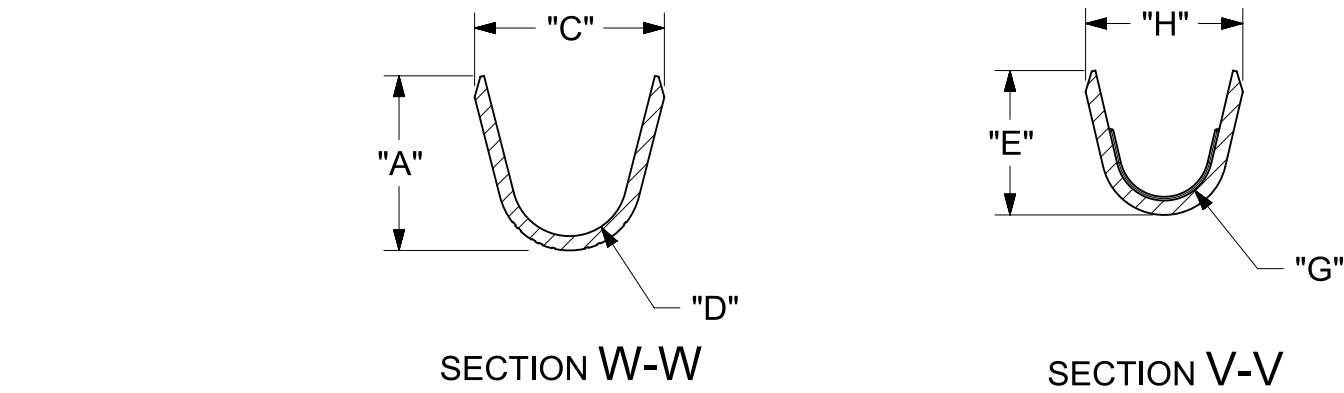

- NOTES
- 1) MATERIAL: PHOSPHOR BRONZE ALLOY
 - 2) TERMINAL PLATING:
"A" - HOT TIN DIP: .000040/0.00102 MIN. OVERALL
"B" - .000015/0.00038 MIN. SELECT GOLD
.000100/0.00254 MIN. SELECT TIN
ALL OVER .000050/0.00127 MIN. NICKEL OVERALL.
"C" - .000030/0.00076 MIN. SELECT GOLD
.000100/0.00254 MIN. SELECT TIN
ALL OVER .000050/0.00127 MIN. NICKEL OVERALL.
PLATING FINISHES B AND C ARE POST PLATED.
 - 3) PRODUCT SPECIFICATION: PS-43045, PS-43650, PS-44300-001.
 - 4) PACKAGING SPECIFICATION: PK-43030-001 (REEL), PK-43030-003 (LOOSE).
 - 5) TERMINAL FOR USE IN MICRO-FIT RECEPTACLE SERIES 43025, 43645, 44133, AND 46623. ONLY 20-24 AWG AND 26-30 AWG TERMINALS CAN BE USED IN TPA RECEPTACLE SERIES 171850 AND 172952.
 - 6) FOR TERMINAL ORIENTATION IN RECEPTACLE SEE DRAWINGS FOR RECEPTACLES.
 - 7) THIS TERMINAL IS DESIGNED IN METRIC.
 - 8) MOLEX RECOMMENDS THE USE OF MICRO-FIT TEST PLUG (SERIES 44242) WHENEVER CONTINUITY TESTING IS PERFORMED. TEST PLUGS MUST NOT BE USED TO MAKE OR BREAK UNDER LOAD. MOLEX DOES NOT RECOMMEND USING STANDARD MATING COMPONENTS (SERIES 43020, 43045, 43640, 43650, OR 43031) FOR HARNESS TESTING PURPOSES.
 - 9) TEXT ON PART IS FOR REFERENCE ONLY. TEXT AND TEXT LOCATION MAY VARY DEPENDING ON PART NUMBER AND/OR TOOL.
 - 10) 18 AWG PART NUMBERS ARE DESIGNED FOR 18 AWG 1061 STYLE WIRE OR A .073/1.85 MAXIMUM INSULATION OUTSIDE DIAMETER.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
FUNCTIONAL SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC: CORRECT THE DIMENSION TYPE			molex MICRO-FIT (3.0) FEMALE CRIMP TERMINAL MICRO-FIT (3.0) FEMALE CRIMP TERMINAL				
= 0	INCH/mm		10:1									
DIVISIONAL SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: CO-000039183 DRWN: Zi Xuan Qin 15-Apr-2026 CHK'D: Zi Xuan Qin 24-Apr-2026 APPR: Xue Qing Zhang 24-Apr-2026			PRODUCT CUSTOMER DRAWING				
		MM		INCH								
	4 PLACES	±	0	±								0
	3 PLACES	±	0	±								0.01
	2 PLACES	±	0.25	±								0.014
	1 PLACE	±	0.35	±								0
	0 PLACES	±	0	±								0
DIVISIONAL SYMBOLS	ANGULAR TOL ± 0.5 °				INITIAL REVISION:			DOCUMENT NUMBER				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				DRWN: MUELLER 2002/08/03			SD-43030-XXXX				
					APPR: MARGULIS 2002/08/03			DOC TYPE PSD				
								DOC PART 001				
				THIRD ANGLE PROJECTION			DRAWING		SERIES		SHEET NUMBER	
							C-SIZE		43030		1 OF 1	