

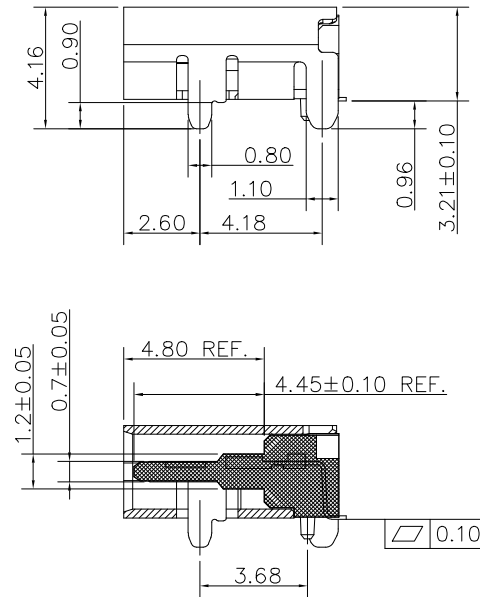
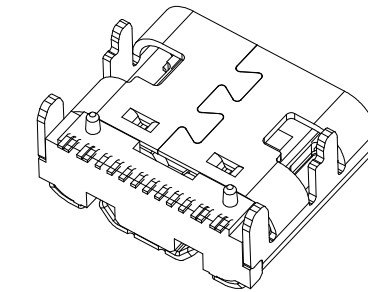


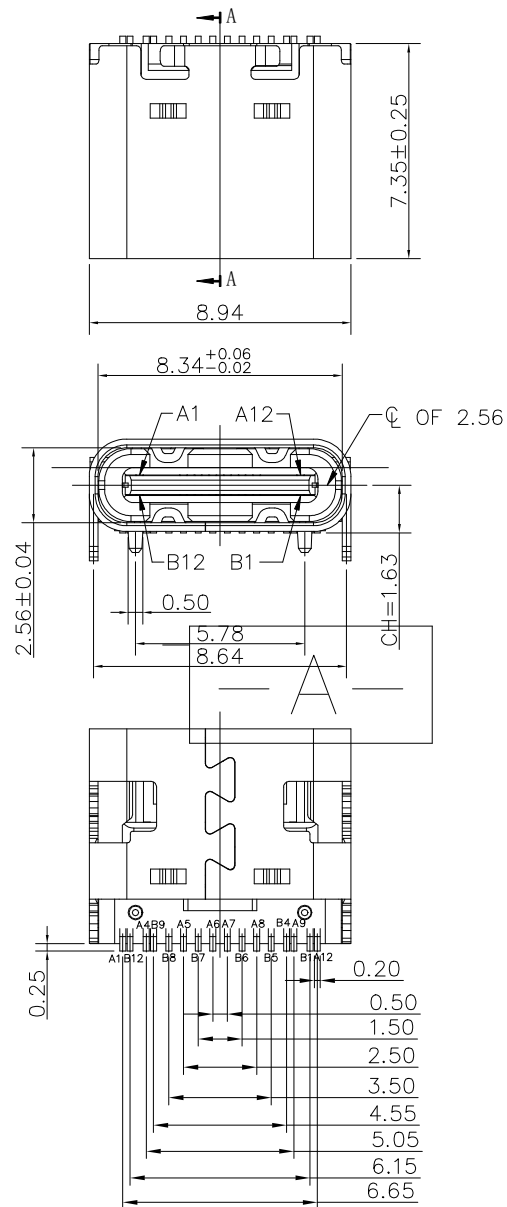

SECTION: A-A

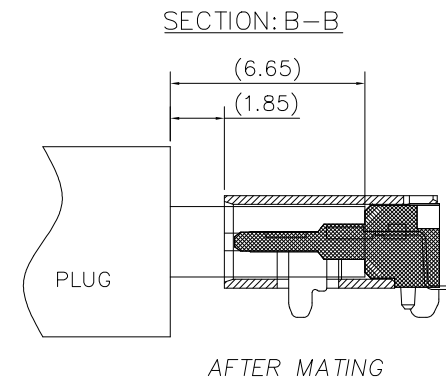

SECTION: B-B

mat'l. code				surface	ISO 1302	tolerance	ISO 406	ISO 1101	projection	product family
ltr				ecn no	dr	date	tolerances unless otherwise specified	angles	linear	USB
A				-	TY	2025/06/27	.X±.35	0°±2'	mm	title
							.XX±.25			USB TYPE C
							.XXX±.15		scale 1:1	16P SMT TYPE
							dr	Tian-Yu Tang	2024/04/12	dwg no
							engr	Tian-Yu Tang	2024/04/12	sheet 1 of 2
							chr	L-Q Lei	2024/04/12	size
							appd	Tim Yao	2024/04/12	A3
										type
										Product Customer Drawing
sheet index	revision	A								
	sheet	1								

NOTE:

1.MATERIAL SPECIFICATION:

- 1.1. HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,
UL94 V-0.
- 1.2. TERMINAL: COPPER ALLOY
- 1.3. MID-PLATE: STAINLESS STEEL
- 1.4. FRONT SHELL: STAINLESS STEEL

2.PLATING SPECIFICATION:

2.1. CONTACTS:

Ni 50u" MIN. UNDER PLATED OVER ALL.
CONTACT AREA :REFER THE PART NUMBER.
SOLDER AREA PLATING Au G/F

2.2. FRONT SHELL:

Ni 30u" MIN. UNDER PLATED OVER ALL.

2.3. MID-PLATE:

CLEAR ONLY

3.MECHANICAL PERFORMANCE,

- 3.1. MATING FORCE : 0.5~2.0kgf.
- 3.2. UNMATING FORCE: 0.8kgf~2.0kgf.
- 3.3. DURABILITY: 20000 CYCLES.

4.ELECTRICAL PERFORMANCE,

- 4.1. VOLTAGE RATING: 20 V DC/AC (RMS. max)
CURRENT RATING:5 AMPS. FOR TOTAL VBUS/GND PINS;
1.25AMPS FOR CC PIN,0.25 AMPS. FOR ALL OTHER CONTACT.
- 4.2. LLCR:
VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
SHIELD: 50mΩ/MAX.
LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
- 4.3. INSULATION RESISTANCE: 100MΩ MIN
- 4.4. DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.

5. ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -40°C~+105°C.

6. IR REFLOW:

THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.

7. PRODUCT PART NUMBER DESCRIPTION:

10177070 - 0 0 0 X X LF


LEAD FREE

PACKING TYPE:

1: TAPE/REEL

CONTACT AREA PLATING

1: 30u"GOLD

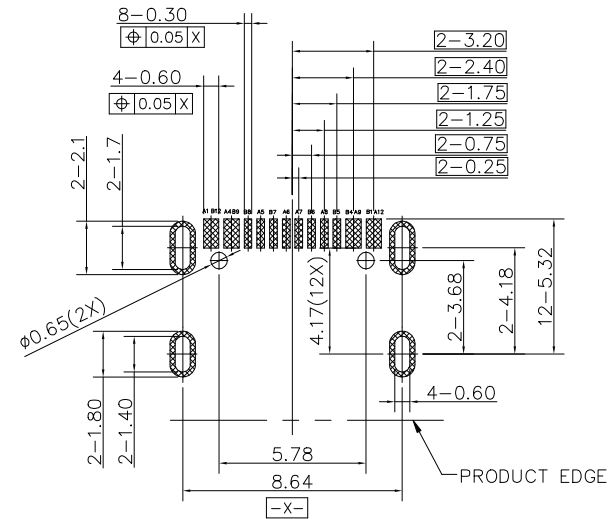

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS 0.80MM;DEFAULT TOLERANCE: ±0.05

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family USB											
ltr ecn no dr date				tolerances unless otherwise specified						title											
A				angles		linear		.X±.35				USB TYPE C 16P SMT TYPE									
						.XX±.25															
				0°±2°				.XXX±.15		scale 1:1											
				dr		Tian-Yu Tang		2024/04/12		Amphenol FCi		dwg no				sheet2 of 2				size	
				engr		Tian-Yu Tang		2024/04/12				10177070				A3					
				chr		L-Q Lei		2024/04/12													
				appd		Tim Yao		2024/04/12													
sheet index		revision sheet		A 2																	