

Wireless echosounder calibration winch manual

Aqalyd Limited

Version 1.1

Table of Contents

User Manual	2
First-use setup.....	3
Supply of power	3
Installation of line on the reels.....	3
Operating the system.....	4
Installing the winches and poles	4
Controlling the winches	5
Android app	6
Charging the batteries	7
Routine maintenance	8
Technical Manual	9
System description.....	10
Winches	10
Hand controller	11
Software.....	11
Changing winch identification.....	11
Poles	11
Communication messages	12
Assembling/disassembling the winch unit	13
Access to winch electronics.....	13
Removing the drum and bearings.....	13
Appendix A: Specifications	14
Appendix B: Supplied Parts	15
Appendix C: Schematics	16

© 2022 Aqualyd Limited

341 Higgins Road

Wakefield

New Zealand

www.aqualyd.nz

The latest version of this manual is available on [github](#).

User Manual

This is the User Manual for the Aqualyd wireless echosounder calibration winch system and provides information on setting up and using the system.

First-use setup

Supply of power

The winch units each require a user-supplied Hikoki MultiVolt 36 V DC battery (and charger). It is suggested that four or more such batteries are part of each calibration set so that a spare battery is always available and can be charging while using the system.

Installation of line on the reels

Line should be added to the reels so that the free end leaves from underneath the drum (and away from you) when viewing the unit with the yellow tube to your right. If the direction of the winches does not match the arrows on the hand controller, it is most likely that the line has been wound on the wrong way.

Operating the system


Installing the winches and poles

Each winch/pole unit is assembled by:

1. Inserting a telescopic pole into the yellow tube on each winch unit (these can be a tight fit - sand the inside of the yellow tube ends if necessary to ease the fit),
2. Extending the telescopic pole to the desired length,
3. Aligning the holes in the yellow tube and pole and inserting the locking pin (the pole will extend about 200 mm inboard from the yellow tube),
4. Inserting the supplied eye-bolt into the hole in the onboard end of the pole ,
5. Attaching a tie-down cord to each eye-bolt using the attached carabiner,
6. Lead the winch line through the eye-bolt on the outboard end of the pole,
7. Secure the assembled units to the vessel,
8. Connect power.

The winch units are designed to be attached to a pipe or plate railing on a vessel ([Figure 1](#)):

- A pipe attachment uses the supplied hose clamps to secure the aluminium section of the winch unit to the railing.
- A plate attachment uses clamps (user supplied) to secure the winch units' plastic base or the aluminium section to the flat plate.

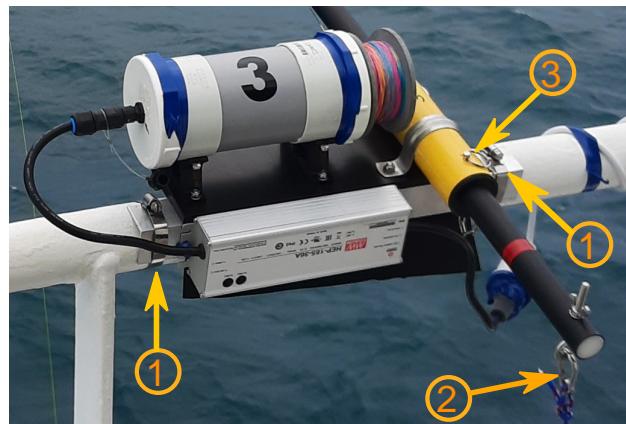

- ① Hose clamps
- ② Carabiner
- ③ Securing pin

Figure 1. Winch unit installed on a ship's railing showing hose clamps, securing pin, and attachment carabiner.

The leverage from the extended poles is countered by the cord attachment from the onboard end of the pole to suitable point(s) on the vessel (e.g., a lower railing or gusset)

Each winch is numbered - place the winches in a location that fits with the layout of the numbered switches on the hand controller ([Figure 2](#)). For example, if one pole is at the bow of the vessel and the other two poles on port and starboard side, place winch 1 at the bow, winch 2 to port and winch 3 to starboard. Note that winch 1 holds the long telescopic pole.

To make it easy to relate the three winch switches to the winch locations, rotate the hand controller so that the winch switches approximately match the locations of the winches on the vessel when facing towards the bow. This will often mean holding the winch controller in a landscape orientation.



Figure 2. Hand controller showing on/off switch, speed control and winch direction controls.

WARNING

When extending the telescopic poles do not extend each section beyond the red band and ensure that each pole clip is closed after extending.

NOTE

Avoid rotating the winches by hand - instead, insert the battery and use the hand controller.

The hand controller and winches automatically form a wireless mesh network that relays commands from the hand controller to the winches even if all winches are not reachable directly from the hand controller.

The hand controller can function as a range extender - to activate this mode, move the switch next to the USB charging port on the end of the hand controller. Multiple range extenders can be used if necessary. When in range extender mode, none of the winch controls on the controller are operational.

Controlling the winches

Individual winches can be controlled using the three in/out switches on the hand controller. The speed of the winches is controlled using the dial. The slowest speed is 20 mm/s and the fastest 1 m/s. Multiple winches can be operated at the same time.

WARNING

Only use speeds in the red section of the dial when the weight on the winch is less than about 3 kg.

The in/out switches are configured to pay out line when the inner side of the switch is pressed. In that sense, the arrow on the switches indicates the direction that the sphere will move when viewed in a split-beam echosounder sphere position plot.

NOTE

It is easy to operate the winches without observing the winch and this can quickly cause unintentional damage to the winches or the poles (e.g., pulling a line too hard when the line is caught on the hull, paying out line when there is no tension on the line leading to tangles). Experience suggests that until the sphere is visible on the echosounder split-beam display, all operation of the winches should be done while observing the winch/pole unit.

Android app

The Winch Status Android app is available on the Google Play Store. It requires an Android device running version 9 of Android or later that supports Bluetooth.

The app shows information about the winches, including line out, line speed, battery voltage, and internal winch temperature ([Figure 3](#))). The app receives this information from the hand controller using Bluetooth.

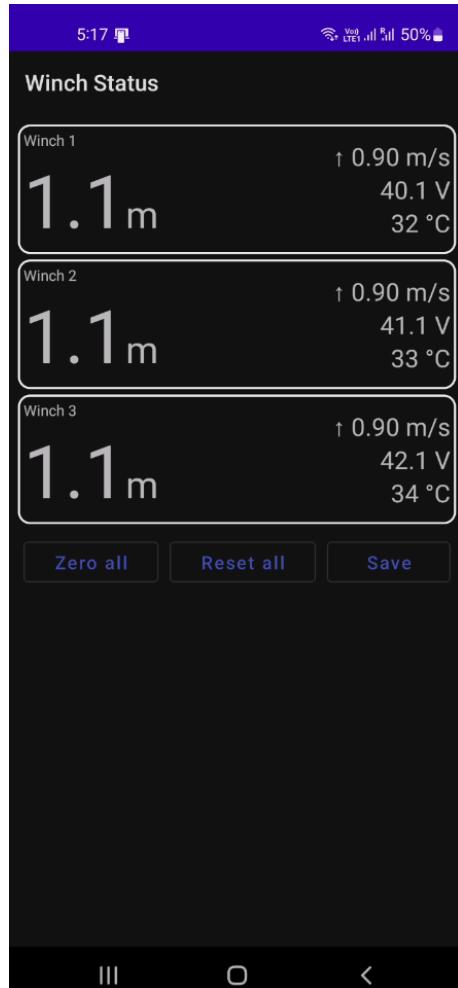


Figure 3. Screenshot from the Android app.

Charging the batteries

The hand controller contains rechargeable batteries. To charge this, connect the supplied USB cable to the unit and to a USB power supply (the USB port on a computer is fine) and *turn the unit on*.

Charging a completely flat battery will take about 4 hours - no harm will occur to the battery if it is connected to the charger for longer than this. A fully charged battery will power a unit for about 40 hours.

Note that the unit will be operating and transmitting whenever USB power is supplied, but will not charge the battery until the power switch is turned on (the on/off switch connects or disconnects the battery from the system - it does not affect supply of USB power to the unit's electronics). This means that a unit with a flat, faulty, or absent battery can be used normally by connecting USB power - it will operate as per normal and charge the battery if present.

No external indication is given as to whether the battery is being charged (there is an internal LED that shows the charging state).

WARNING

Charging will only occur when the on/off switch on the hand controller or range extender is in the on position.

Routine maintenance

After each use of the system:

- gently wash down the winches and poles in freshwater
- separate out the telescopic parts of the poles and allow any internal water to dry before reassembling

NOTE The winch batteries are best stored in a partially discharged state. It is recommended that the batteries are charged prior to a calibration rather than immediately after a calibration.

Technical Manual

This is the Technical Manual for the Aqualyd wireless echosounder calibration winch system. This section provides details on how the system works, the main components, and information to assist with repair and modifications of the system.

System description

The overall system consists of a hand controller, three winches, and an optional range extender. Communication between these units occurs via a 2.4 GHz mesh network, provided by Digi XBee3 radio modules. The hand controller broadcasts a message at 10 Hz that contains the state of all three in/out switches (up, down, stationary) and the potentiometer (0-255). Each winch unit listens to these messages, picks out the relevant in/out switch state and sends speed and direction commands to the motor controller, which operates the stepper model to rotate the winch drum. The relationship between the speed setting on the hand controller and the actual motor speed is determined by calculations done by the code running in the winch unit. At every 5th broadcast, each winch replies with winch status information which the hand controller sends via bluetooth to an Android app.

The system is provided in two parts: 1) a transit/storage case that contains the hand controllers and three winch units, and 2) a tube that contains three telescopic poles ([Figure 4](#)).

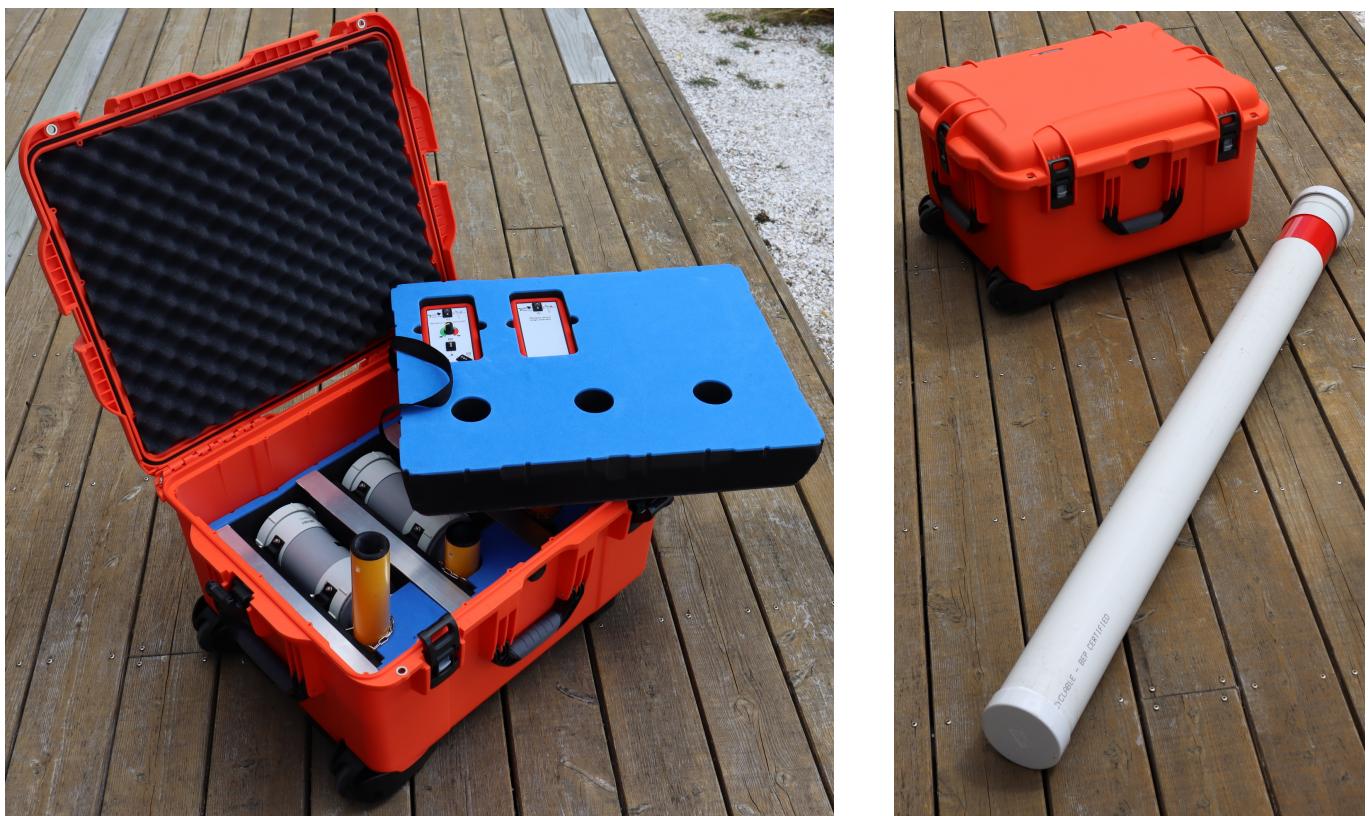


Figure 4. Supplied winch system showing (left) the transit case with included winches and controllers, and (right) the transit case and pole tube.

Winches

The motors are of NEMA 23 size with an integrated 4.25:1 planetary gearbox, supplied by StepperOnline (model 23HS30-2804S-PG4). The motor is driven from a Pololu Tic T246 motor controller which is controlled via serial communication with a microPython programm running on the XBee3 radio module in each winch unit.

The acceleration and deceleration applied when the motor speed is changed is determined by a programmable setting in the Tic T246, as well as the maximum motor speed, and command timeout

when no hand controller messages are received.

The winches were designed to hold a 6 kg load and are able to lift and lower 6 kg at slow speeds. Operation at higher speeds is only possible with smaller loads. The winch units operate with a 10-40 V DC input, but 36 V is needed to achieve sufficient motor torque to hold a 6 kg line load.

Hand controller

The hand controller contains a Digi XBee3 radio module, switches, a potentiometer, and rechargeable battery. The XBee3 is integrated in a SparkFun Thing Plus XBee3 board (P/N WRL-15454) which provides power to the XBee3 via USB or a Lithium-Polymer battery. Battery management circuitry is also included that will charge the battery when USB power is provided.

A switch on the hand controller sets whether the hand controller operates as a controller or as a range extender. In range extender mode the unit sends no control messages to the winches.

Software

The hand controller runs a microPython program on the XBee3 module to translate buttons presses and speed setting into the message that is broadcast to the winches. The XBee3 in each winch also runs a microPython program that receives these messages, decodes them and sends motor speed and direction commands to the motor controller. The code that runs on these XBee3 modules is available on [github](#).

Uploading the microPython code to the XBee3 module in the hand controller is done via the USB connector on the hand controller. Uploading to the XBee3 module in the winches requires a separate board that provides serial communication access to the XBee3 (e.g. an XBee Grove Development Board). Modifying the parameters in the Pololu motor controller can be done via the USB connector on the Pololu unit.

Changing winch identification

Changing the winch identification may be necessary when replacing a faulty winch.

Each winch has an identification number (1, 2, 3). This is used by each winch to select the appropriate part of the message sent by the hand controller. This number is stored in the NI parameter in the XBee3 unit and is read when powering up. Changing this number can be done using the Digi XCTU software (via USB) or the Digi XBee mobile app (via Bluetooth). The Bluetooth password is **aqualyd**.

Note that the hand controller only sends out messages to winches with identification codes of 1, 2, or 3. If the winch NI parameter is set to any other value that winch will not act on any commands from the hand controller.

Poles

The poles are telescopic and made of a 50/50 mix of carbon fibre and fibreglass. They are originally made for window washing and replacements are readily available from cleaning suppliers.

Communication messages

The message broadcast from the hand controller to the winches consists of a single string containing six ASCII characters.

The first three characters specify the required winch motion for each winch (first character for winch 1, second for winch 2 and the third for winch 3). The value of each character is **0**, **1**, or **2**. **0** means to stop the winch, **1** to pay out line, and **2** to take in line.

The last three characters are an integer number between 0 and 255 that gives the position of the speed dial.

For example, a message of **000105** will ensure that all winches are stopped and a message of **011000** will cause winches 2 and 3 to pay line out at the minimum speed. A message of **201255** will cause winch 1 to take line in and winch 3 to pay line out, both at the maximum speed. Winch 2 will not rotate.

The winch status message generated by each winch unit is forwarded by the hand controller using the Xbee3 User Data Frame mechanism over the Bluetooth Low Energy communication link. The hand controller simply repeats the messages it receives from the winches without altering the content. The message is a comma separated ASCII string in the form:

w,v.v,t,pp.pp,ss.ss

where the fields indicate:

Field	Content	Decimal places	Units
w	Winch identification (1, 2, or 3)		
v.v	Battery voltage	1	V
t	Winch internal temperature	0	°C
pp.pp	Line paid out (can include leading negative sign)	2	m
ss.ss	Line speed (can include leading negative sign)	2	m s^{-1}

A negative line paid out value indicates the line has been taken in more than paid out. A negative line speed indicates the line is being taken in.

Assembling/disassembling the winch unit

tbc

Access to winch electronics

tbc

Removing the drum and bearings

tbc

Appendix A: Specifications

Parameter	Value	Units
Maximum line speed	1	m/s
Minimum line speed	0.02	m/s
Maximum stationary load	6	kg
Maximum load at 1 m/s line speed	~1.5	kg
Maximum load at 0.5 m/s line speed	~3	kg
Winch supply voltage	10-40	V DC
Winch supply voltage for design performance	36	V DC
Current usage at 6 kg load, 0.02 m/s	<0.1	A
Peak current usage at 3 kg load, 0.5 m/s	0.07	A
Recommended minimum current rating of power supply	1.5	A
Maximum current usage based on motor specs	3.4	A
Wireless communication protocol	XBee DigiMesh	
DigiMesh network identification	0xA1A1	
DigiMesh network channel	0x1A	
DigiMesh wireless channel	26 (2480 MHz)	
Hand controller/range extender battery	Nokia BL-5C	
Battery chemistry	Lithium Ion	
Battery voltage	3.7	V
Battery rating	1.05	Ah
Battery rating	3.8	Wh

Appendix B: Supplied Parts

A wireless system consists of the following components:

Component	Quantity
Transit/storage case (Nanuk 960)	1
Case foam (lower tray)	1
Case foam (upper tray)	1
Winch unit (short pole)	2
Winch unit (long pole)	1
Hand controller	2
Pole transit/storage pipe	1
Short pole	2
Long pole	1
Pole attachment cord	3
Pole attachment eyebolt	3
Charging cord (USB)	1
User & Technical manual	1
Hose clamps (46-70 mm diameter)	6

Appendix C: Schematics


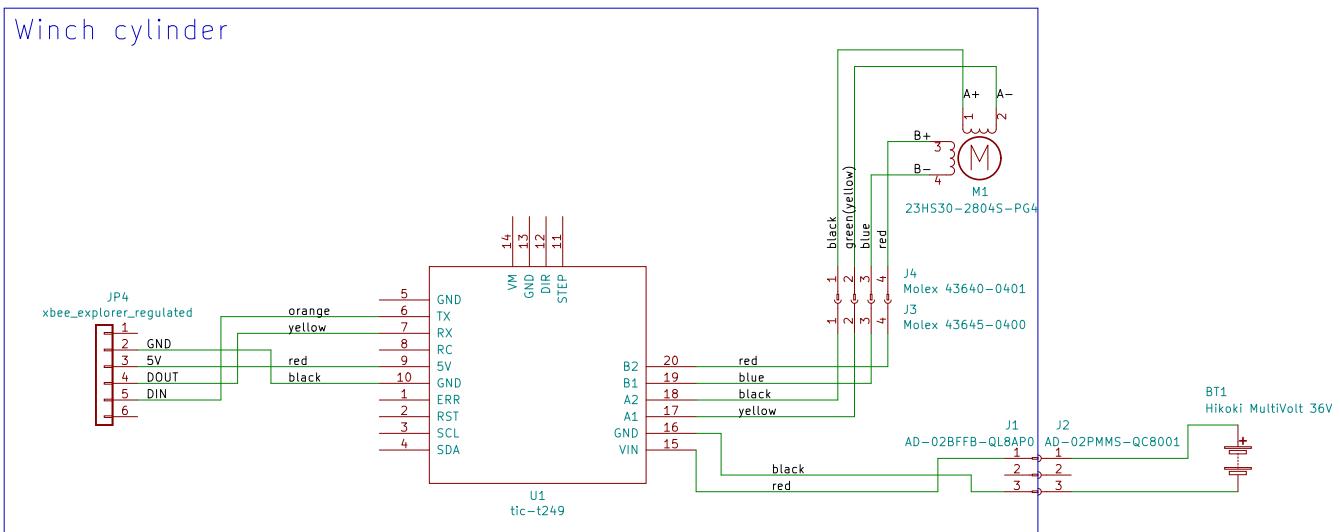


Figure 5. Wiring schematic for the winch unit.

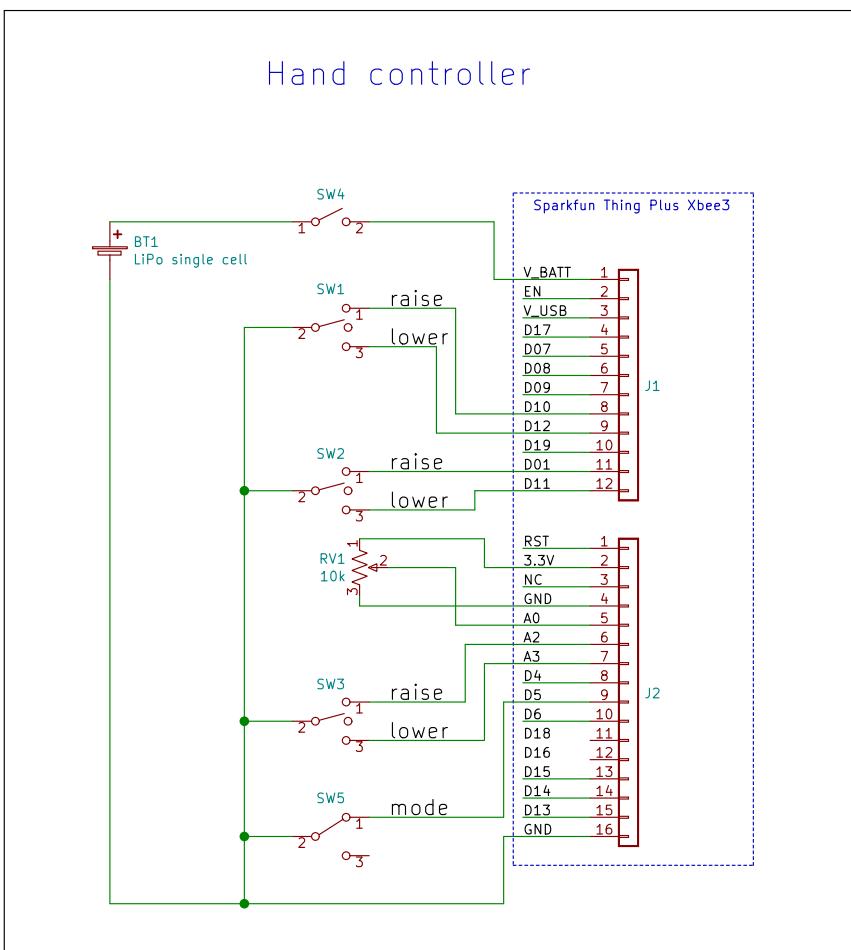

Wiring colour standard:

- SW1, SW2, SW3 terminal 1: yellow
 - SW1, SW2, SW3 terminal 2: black
 - SW1, SW2, SW3 terminal 3: orange
 - RV1 terminal 1: red
 - RV1 terminal 2: green
 - RV1 terminal 3: black
 - BT1 +ve: red
 - BT1 gnd: black

Versioning:
v1.0 – original
v1.1 – moved SW2 to different XBee3 pins
v2.0 – range extender is now part of the controller

Figure 6. Wiring schematic for the hand controller and range extender