Yealink T46U

User Guide



Version	Date	Comments
1.0	23/11/2021	Initial release

The information contained within this document, or subsequently provided, whether verbally or in documentary form, is confidential to Gamma and is provided to the organisation named within this document only. It shall not be published, disclosed or reproduced wholly or in part to any other party without our prior written consent. Gamma has made all reasonable efforts to ensure the accuracy and validity of the information provided herein and we make no warranties or representations as to its accuracy. Gamma should be notified of all requests for disclosure of Gamma supplied information under the Freedom of Information Act.

Contents

Introduction 5

What's in the box 5

Assembling the phone 6

Getting to know your T46U 8

LED Indicators *9*

Phone Icons *9*

Line Key Icons *10*

Icon indicators ..... ***Error! Bookmark not defined.***

Entering Characters on the T46U 10

Making a call 10

Using the Keypad *10*

Redialling a number *10*

Using the Directory *11*

Placing a new call when a call is already active. *11*

Using Call History *11*

Answering an incoming call 11

Answering an incoming call when on another call *11*

Reject an incoming call *12*

Switching between Handset, Speakerphone and Headset modes 12

Muting a call 12

Hold / Resume Calls 12

Call Forwards 12

Forward incoming calls manually *13*

Call Transfer 13

Blind Transfer *13*

Warm (Consultative) Transfer *13*

Conferencing 13

Contacts 15


© Gamma. All rights reserved. Confidential.

Introduction

This user guide will help you navigate and use your Yealink T46U handset. It will give you an overview of your handset and walk you through tasks so that you can successfully use your Yealink T46U.

The T46U will arrive pre-configured and needs to be connected to the internet and powered up using Power over Ethernet (PoE) or via an AC (10W / 5V / 2A) power supply


What's in the box

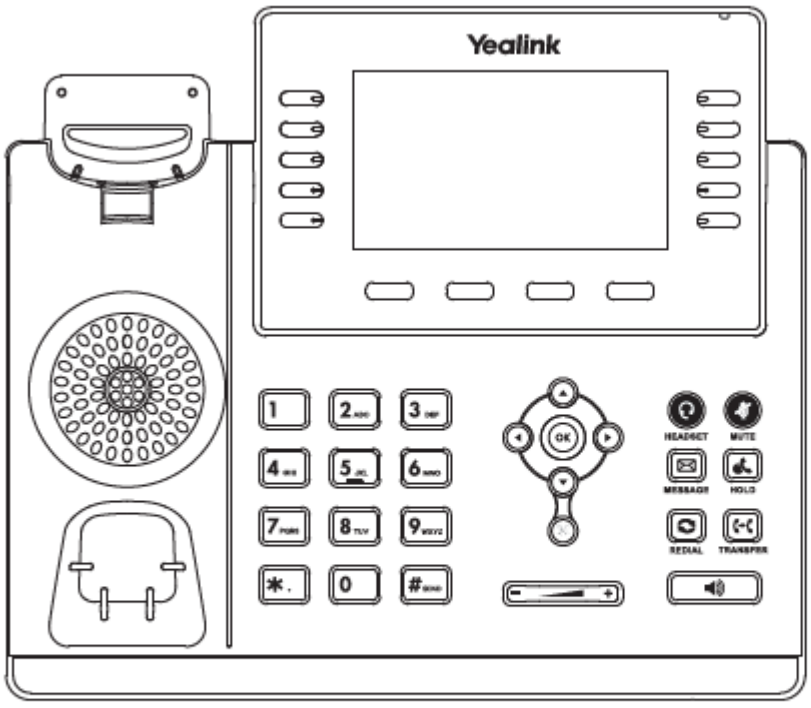

IP Phone




Handset



Handset Cord



Ethernet Cable
(2m CAT5E UTP Cable)




Stand


© Gamma. All rights reserved. Confidential.

Assembling the phone

1. Attach the stand, as shown below:

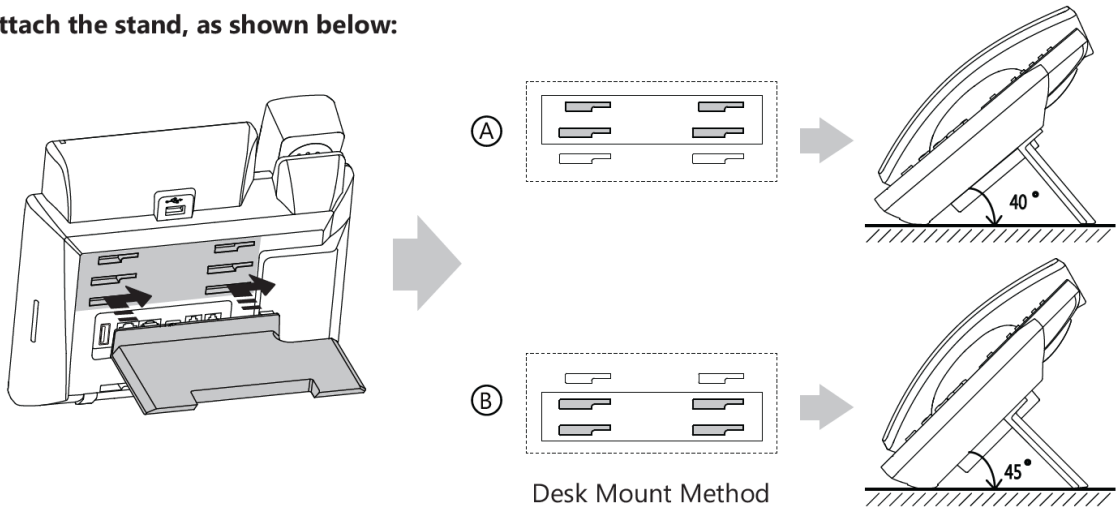


2. Connect the handset / headset to the device

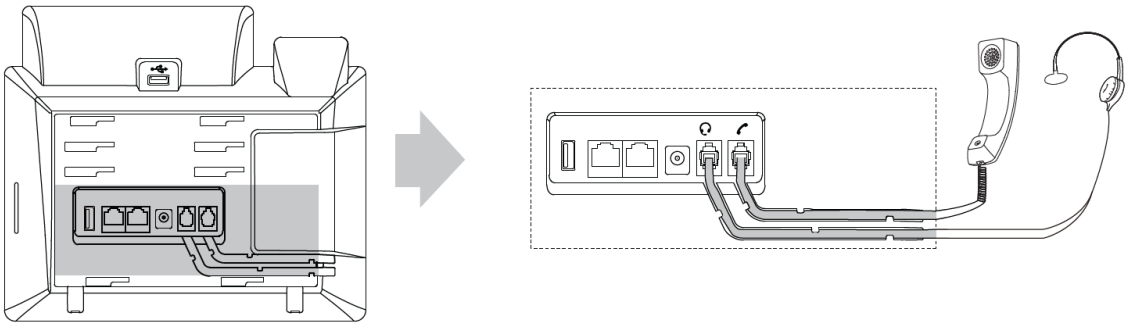

© Gamma. All rights reserved. Confidential

3. Connect to the network / power

You have two options for network and power connections. Your system administrator will advise you which one to use.

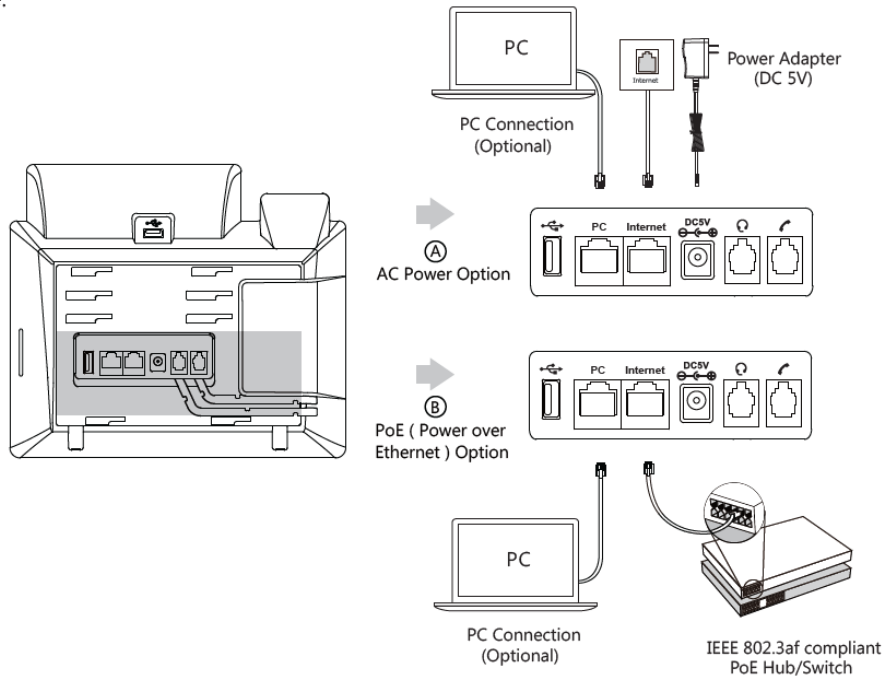


Note: The T46U should be used with the Yealink original power supply, 5V/2A only. The use of 3rd party power adapters may cause damage to the device. If using PoE, you need to make sure that the PoE hub/switch is PoE compliant.

When the device starts, it automatically begins the initialisation process. After this has been completed, which can take serval minutes, your device is ready to use with Horizon.

© Gamma. All rights reserved. Confidential.

Getting to know your T46U

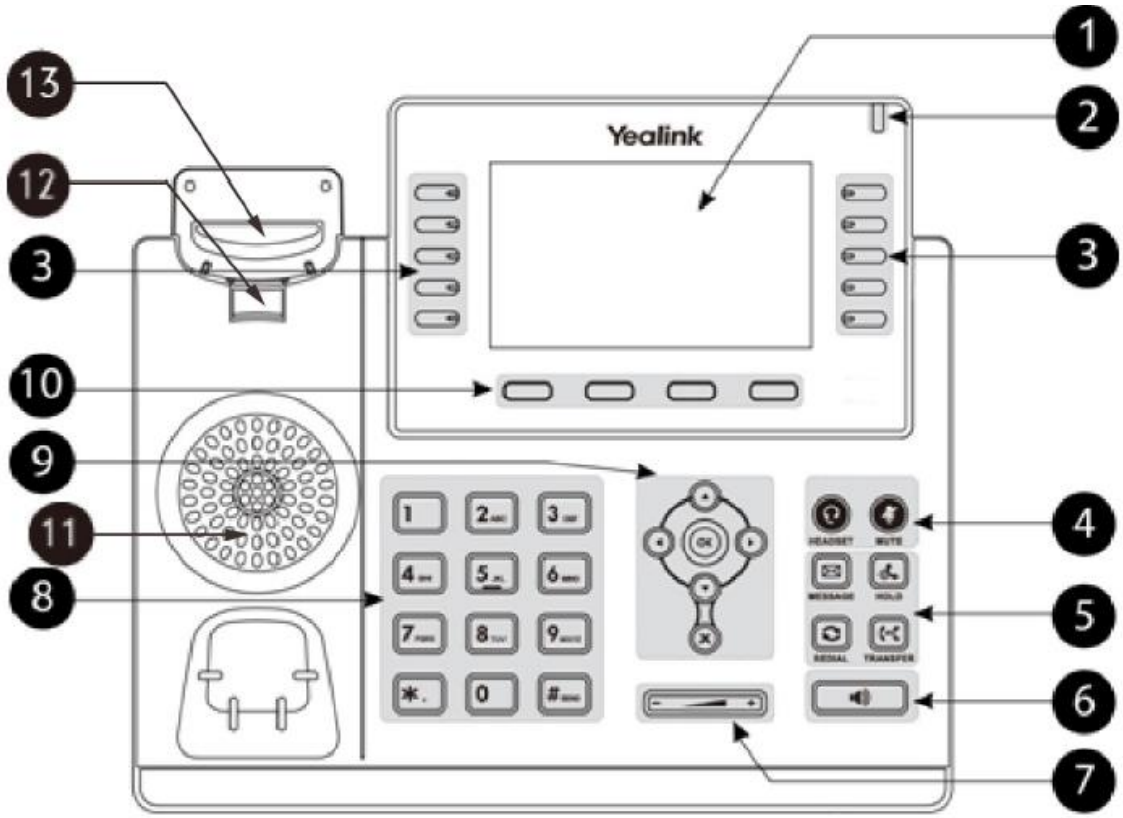

Number	Item	Description
1	Phone Screen	
2	Power LED Indicator	Indicates call status, message status and system status of the device
3	Line Keys	Access your phone lines & features
4	HEADSET key	Toggles the headset on/off. Glows green when headset is active
	MUTE key	Toggles the microphone on/off. Glows green when active.
5	MESSAGE key	Access your voicemail
	HOLD key	Places call on hold or resumes a held call
	REDIAL key	Redial the previous number
	TRANSFER key	Starts the call transfer process
6	Speakerphone key	Toggles the device loudspeaker. Glows green when active
7	Volume Key	Adjust the volume of the handset, headset and speaker
8	Keypad	Allows you to enter numbers, letters and special characters.
9	Navigation keys	• Scroll through information and options displayed • Access call history and directory
	OK key	Confirms the action or answers an incoming call
	Cancel key	Cancels an action or rejects an incoming call
10	Soft key	Access device features
11	Speaker	Provides ringer and speakerphone functionality.

© Gamma. All rights reserved. Confidential

12	Reversible tab	Secures the handset in the cradle when the phone is mounted vertically.
13	Hookswitch	Connects or disconnects the device from a phone line.

LED Indicators

Power

LED Status	Description
Solid red	The phone is initialising
Fast flashing (0.3s)	The phone is ringing
Slow flashing (1s)	The phone has a voicemail
Solid red for 0.5s and off for 3s	The phone is in power-saving mode.

Line Keys

LED Status	Description
Solid green	Active call
Fast flashing green	Incoming call
Fast flashing green	Active call is placed on hold
Off	The line is inactive.

Phone Icons

Icon	Description	Icon	Description
	Wired network is unavailable		Phone lock
	Wired network is unreachable		Missed calls
	Speakerphone (hands-free)		Call forward always enabled
	Call forward busy enabled		Call forward no-answer enabled
	Handset mode		Bluetooth is enabled.
	Headset mode		Voicemail
	Do not disturb		Bluetooth is paired and connected
	Phone warning		Wi-fi connection is successful
	Mute		Wi-fi connection is unreachable
	Ringer is off		Wi-fi connection has failed

© Gamma. All rights reserved. Confidential.

Line Key Icons

Icon	Description	Icon	Description
	Line is registered successfully		Do not disturb is enabled
	Registration failed		Call forwarding is enabled
	Registration in progress		

Entering Characters on the T46U

Task	Action
Switch input modes	Press **ABC**, **abc**, **2aB** or **123** soft key to switch the input modes
Enter letters	Press **ABC**, **abc**, **2aB** or **Abc** mode. Press a keypad key repeatedly to view the character options and stop when the letter you wish to enter is displayed. Wait 1s and then enter the next letter
Enter numbers	Select **123** mode and press the corresponding keys
Enter special characters	Select **ABC**, **abc**, **2aB** or **ABC** mode, press * or # key at least once to enter one of the following special characters: ***** key: *.,'?!\-()@/:_;+&%=<>£₾$¥¤[]{}~^¡¿§#"| **#** key: # In **123** mode, you can press the * key to choice the following special characters: *:/@[].
Insert space	Press **ABC**, **abc**, **2aB** or **Abc** mode and press the **0** key.
Move cursor	Press the left or right navigation key to position the cursor.
Delete one or more characters	Position the cursor to the right of the character and press the **Delete** soft key.

Making a call

Using the Keypad

You can make a call using the keypad by either picking up the handset receiver or pressing the headset or speakerphone buttons and dialling a number on the keypad. Alternatively, you can dial the number and pick up the handset or press the speakerphone or headset key.

Redialling a number

The T46U keeps a record of all the calls made or received. You can go to the call history using the navigation keys or pressing the "History" soft key, or you can press the Redial button to call the last number dialled.

© Gamma. All rights reserved. Confidential

Using the Directory

You can place a call to a contact directly from your directory. To do this, complete the following steps.

1. Select **Directory** (**Dir**)
2. Select the desired contact group or All Contacts.
3. Highlight the desired contact and select Send.

Placing a new call when a call is already active.

When you are on a call, you can place your current call on hold and place a new call by completing the following steps:

1. Press the **HOLD** key, or select **Hold** to place the original call on hold
2. Select **New Call**
3. Enter the telephone number or select the relevant contact from the directory
4. Select **Send**.

Using Call History

You can dial a number using the Call History of the device, which contains the details of calls that were recently made, received, or missed.

1. Press **History** or go to **Menu** → **History**
2. Select the desired call list
3. Highlight the contact and select **Send**.

Answering an incoming call

When receiving a call, you can answer the call in one of the following ways:

- Pick up the handset
- Press the Speakerphone button
- Press the Headset button
- Press **Answer** or the line key that has the flashing green LED indicator.

Answering an incoming call when on another call

You can answer a call when there is already an active call on your phone if you have Call Waiting enabled on Horizon.

When you are in an active call and an incoming call arrives on the phone, a call waiting tone beeps, and the incoming call information is displayed. Press "**Answer**".

© Gamma. All rights reserved. Confidential.

Reject an incoming call

You can reject a call manually, and the call will receive the call forwarding busy treatment. The rejected calls are displayed in the Received Calls list in your Call History list.

You can also reject an incoming call using Do Not Disturb by going to **Menu** > **Features** > **DND** or by selecting the **DND soft key**.

Switching between Handset, Speakerphone and Headset modes

You can select your desired mode before placing a call, or you can switch modes during the call.

When a call is ringing, you can either pick up the handset, press the **Speakerphone** button to answer the call via the speaker or press the **HEADSET** key to answer with your headset. This can also be done in the call as well by pressing the **HEADSET** or Speakerphone buttons.

Muting a call

When you're on a call, you can mute your audio so that the other party on the call cannot hear you, though you can hear them. To do this, you simply press the **MUTE** button. When activated, the **MUTE** button glows red. To unmute the call, press the **MUTE** button again and the buttons light will switch off.

If you have selected the **MUTE** button whilst the phone is idle (i.e., there is no active call), the **MUTE** button will glow red, and the microphone will be muted on the next active call until the user has hit the **MUTE** button to turn it off.

Hold / Resume Calls

You can place an active call on hold and resume the call when you're ready by simply pressing the **HOLD** button to place the call on hold or to resume it, or by pressing the corresponding line key (**Hold** / **Resume**).

Call Forwards

You can set up the Call Forward Always, Call Forward Busy and Call Forward No Answer from the T46U device. For full details on these features, please see the Horizon Features guide.

1. Go to **Menu** → **Features** → **Call Forward**

© Gamma. All rights reserved. Confidential

2. Select the desired forwarding type and select **Enabled** or **On** from the corresponding field
3. Enter the telephone number that you want to forward to in the **Forward To** field
    a. You can also press **Directory** and select the desired contact from the Directory list.
4. If you select the **No Answer Forward** option, enter the desired ring time to wait before forwarding the call in the **After Ring Time** field
5. Select **Save**.

To deactivate call forwards, you simply select the call forwarding type to **Disabled** or **Off** in step 2.

Forward incoming calls manually

You can manually forward the call to another contact whilst your phone is ringing. To do this, press the **Forward** key when the phone is ringing and then enter the number you want to forward the call to before clicking **Send**.

Call Transfer

Blind Transfer

You can transfer a call to another number immediately without consulting with the other party first, which is called a blind transfer.

1. Press the **TRANSFER** key or the Transfer line key during a call
2. Enter the number or select the contact from the placed call list that you want to transfer to
    a. You can alternatively press the **Directory** (**Dir**) button and select the desired contact from the Directory list
3. Press **B Transfer** or **TRANSFER** key to complete the transfer.

Warm (Consultative) Transfer

You can transfer a call to another number and speak to the other party first before you transfer the call through to them. This is a warm, or consultative, transfer.

1. Press the **TRANSFER** key or the Transfer line key during a call
2. Enter the number or select the contact from the placed call list that you want to transfer to
    a. You can alternatively press the **Directory** (**Dir**) button and select the desired contact from the Directory list
3. Once the contact has answered, press **Transfer** or **TRANSFER** key to complete the transfer.

Conferencing

You can set up a network conference on the device with up to 2 other contacts.

© Gamma. All rights reserved. Confidential.

1. Place a call to the first party.
2. Select **Conference (Conf)**, and then the active call is placed on hold
3. Dial the next party.
4. When the second party answers the call, select **Conference (Conf)** to add the second party to the conference
5. Select **Conference (Conf)** to place a new call, then the active conference call is placed on hold.
6. Enter the number of the new party and press the **OK** or **Send** key.
7. When the new party answer the call, select **Conference (Conf)** to add the new party to the conference.

© Gamma. All rights reserved. Confidential

Contacts

Name	Richard James
Role	Cloud PBX Product Manager
✉	richard.james@gamma.co.uk

© Gamma. All rights reserved. Confidential.