

Joint Altitude and Beamwidth Optimization in UAV-Enabled Multiuser Networks

A Performance Analysis of the Fly-Hover-and-Communicate Protocol

Andreas Manitsas

amanitsb@ece.auth.gr

Institution: Department of Electrical & Computer Engineering, Aristotle University of Thessaloniki
(AUTH)

Course: UAV13 – Advanced Topics in Wireless Communications

Date: July 2026

Abstract

Unmanned Aerial Vehicles (UAVs) are increasingly being deployed as flexible aerial base stations to provide on-demand wireless connectivity. This report investigates the performance trade-offs associated with the joint optimization of UAV flying altitude and directional antenna beamwidth. Utilizing a fly-hover-and-communicate protocol, where the ground area is partitioned into a tessellation of hexagonal cells, we analyze three fundamental multiuser communication models: downlink multicasting, downlink broadcasting, and uplink multiple access. Analytical expressions for the system throughput are derived from first principles, and numerical simulations are conducted to reproduce and validate the theoretical frameworks. The findings demonstrate that optimal 3D placement and antenna configuration critically depend on the specific communication paradigm. Notably, increasing altitude enhances multicast performance but degrades broadcast capacity, whereas the uplink multiple access sum rate remains fundamentally independent of altitude. Finally, the study explores practical network dimensioning by determining the minimum UAV fleet required to satisfy specific target rates under varying ground terminal densities.

Contents

1	The Fly-Hover-and-Communicate Protocol	3
1.1	Why the Ground Area is Partitioned into Hexagonal Cells	3
2	Practicality of the Fly-Hover-and-Communicate Protocol	3
2.1	Impact of Fading, Interference, and Limited Energy	3
2.2	Dense Urban vs. Rural LoS Environments	4
2.3	Cooperative Multi-UAV Scenarios	4
3	Derivation of the Downlink Broadcast Sum Rate ($\bar{R}_{BC}$)	4
3.1	Antenna and Channel Model Fundamentals	4
3.1.1	Coverage Geometry	5
3.1.2	User Distribution Assumptions	5
3.2	Local Signal-to-Noise Ratio (SNR) and User Rate	5
3.2.1	Integration Limits and Sum Rate Derivation	6
4	Numerical Results and Paper Reproduction	7
5	References	9

1 The Fly-Hover-and-Communicate Protocol

The fly-hover-and-communicate protocol is a localized service model designed to serve a large geographical area by dividing the communication process into distinct spatial and temporal phases.

- **Clustering:** The total area and its ground terminals (GTs) are partitioned into smaller, disjoint clusters.
- **Sequential Service:** The UAV flies to the center of each cluster one by one.
- **Hovering:** Instead of communicating while moving, the UAV stops and hovers statically above the cluster center for a specific time duration (T_i).
- **Communication:** During this hovering period, it establishes links and exchanges data exclusively with the GTs located within that specific cluster. Once the data transfer is complete, it flies to the next cluster center. Assuming the UAV's flying speed is sufficiently high, the total mission completion time is heavily dominated by these hovering durations.

1.1 Why the Ground Area is Partitioned into Hexagonal Cells

The decision to partition the ground area into a tessellation of regular hexagonal cells is driven by the geometry of the UAV's antenna and the need for efficient 2D coverage.

- **Circular Antenna Footprint:** The UAV is equipped with a directional antenna with an adjustable half-power beamwidth Θ . When hovering at an altitude H , the antenna's main lobe projects a circular coverage area (a disk) on the ground with a radius of $\bar{r} = H \tan \Theta$.
- **Tessellation Efficiency:** To cover a geographical area without leaving unserved gaps or creating overlapping interference zones, the space must be tiled. Out of the three regular polygons that can perfectly tile a 2D plane (triangles, squares, and hexagons), the regular hexagon is the closest geometric approximation to a circle.
- **Complete Coverage:** By defining the radius of these hexagonal cells to be exactly equal to the antenna's footprint radius $\bar{r}$, the system guarantees that when the UAV hovers precisely over the cell's center, every single user within that hexagonal cell falls safely inside the main lobe's coverage disk.

2 Practicality of the Fly-Hover-and-Communicate Protocol

Jointly optimizing a UAV's continuous 3D trajectory along with dynamic multi-user scheduling and resource allocation forms a highly complex problem. The fly-hover-and-communicate protocol is practical because it decouples the spatial mobility problem from the communication problem. By discretizing the operation—using the Traveling Salesman Problem (TSP) for transit and static hovering for data transmission, the system transforms an continuous optimization challenge into a manageable, low-complexity framework that simplifies synchronization, channel estimation, and scheduling.

2.1 Impact of Fading, Interference, and Limited Energy

- **Fading:** The model assumes a deterministic line-of-sight (LoS) channel. Introducing small-scale fading (such as Rayleigh, Rician, or Nakagami- m) replaces deterministic path loss with probabilistic signal variations. The optimization objective would necessarily shift from maximizing deterministic Shannon capacity to optimizing ergodic capacity or

minimizing outage probability, requiring additional fading margins that would likely force the UAV to lower its altitude or narrow its beamwidth to maintain reliable links.

- **Interference:** The current framework assumes orthogonal access across cells or a single active UAV. If inter-cell or external interference is introduced, the system becomes limited by the Signal-to-Interference-plus-Noise Ratio (SINR) rather than just SNR. To manage this, interference avoidance or cancellation techniques (like Successive Interference Cancellation in NOMA) would be required, and the optimal beamwidth Θ would shrink to avoid capturing or causing spatial interference.
- **Limited Energy:** The paper bypasses the energy costs of flying and hovering. In reality, maintaining a static hover consumes significant propulsion energy. Introducing a finite energy budget would strictly limit the total hovering time ($\sum T_i$), shifting the fundamental objective from pure throughput maximization to energy efficiency (maximizing bits per Joule).

2.2 Dense Urban vs. Rural LoS Environments

In rural environments, a pure LoS path is virtually guaranteed, meaning path loss strictly increases with the distance $\sqrt{H^2 + r^2}$. Therefore, for broadcasting, the optimal altitude is mathematically driven to its absolute minimum (H_{min}).

In dense urban environments, severe blockage from buildings creates a probabilistic mix of LoS and Non-Line-of-Sight (NLoS) links. Increasing the UAV's altitude initially improves the probability of establishing a clear LoS link (escaping the urban clutter), which significantly boosts channel gain before free-space path loss eventually takes over. Consequently, the optimal altitude would no longer be at the boundary constraints (H_{min} or H_{max}), but rather at a specific intermediate altitude that optimally balances LoS probability against distance-dependent path loss.

2.3 Cooperative Multi-UAV Scenarios

If multiple UAVs cooperate and share the same spectrum, the altitude and beamwidth trends observed in the single-UAV model would break down. For instance, in the multicast model, continuously increasing the altitude ($H \rightarrow H_{max}$) expands the coverage footprint. In a multi-UAV setup, this expansion would cause severe overlapping coverage and co-channel interference between adjacent UAVs. To preserve spatial multiplexing and limit interference, cooperating UAVs would be forced to operate at much lower altitudes with highly focused, narrow beamwidths

3 Derivation of the Downlink Broadcast Sum Rate ($\bar{R}_{BC}$)

We select the downlink broadcasting (BC) model to re-derive the sum rate expression from first principles.

3.1 Antenna and Channel Model Fundamentals

The UAV is equipped with a directional antenna with an adjustable half-power beamwidth $\Theta \in (0, \pi/2)$. The antenna gain G is approximated by a step function:

$$G = \begin{cases} \frac{G_0}{\Theta^2}, & 0 \leq \theta \leq \Theta \\ 0, & \text{otherwise} \end{cases}$$

where $G_0 \approx 2.2846$ is a constant derived from the antenna's radiation pattern. Assuming a rural Line-of-Sight (LoS) environment, the channel power gain $h(r)$ at a horizontal distance r from the projection center of the UAV is modeled as:

$$h(r) = \frac{\beta_0}{H^2 + r^2}$$

where β_0 is the channel power gain at a reference distance of 1 meter, and H is the UAV's altitude.

3.1.1 Coverage Geometry

When the UAV hovers at altitude H , the conical main lobe of the directional antenna projects a circular disk onto the ground. Using basic trigonometry, the radius of this coverage disk is $\bar{r} = H \tan \Theta$. The total area of this continuous circular footprint $\mathcal{A}'_i$ is:

$$A'_s = \pi \bar{r}^2 = \pi H^2 \tan^2 \Theta$$

3.1.2 User Distribution Assumptions

The Ground Terminals (GTs) are assumed to be uniformly and continuously distributed across the entire region with a spatial density of ρ GTs/m². Therefore, the average number of users strictly bounded within the UAV's instantaneous coverage footprint is:

$$K'_s = \rho A'_s = \rho \pi H^2 \tan^2 \Theta$$

3.2 Local Signal-to-Noise Ratio (SNR) and User Rate

In the broadcasting model, the UAV transmits independent data streams to the K'_s users via Frequency Division Multiple Access (FDMA). The total available bandwidth W and the total transmit power P_d are equally partitioned among all users.

The received SNR for a single user at distance r is:

$$\gamma_{BC}(r) = \frac{\left(\frac{P_d}{K'_s}\right) Gh(r)}{N_0 \left(\frac{W}{K'_s}\right)} = \frac{P_d Gh(r)}{N_0 W}$$

By defining the system constant $a = \frac{P_d G_0 \beta_0}{N_0 W}$ and substituting G and $h(r)$, the SNR becomes:

$$\gamma_{BC}(r) = \frac{a}{\Theta^2 (H^2 + r^2)}$$

The individual achievable rate for this user (normalized by the allocated bandwidth fraction) is:

$$R_{BC}(r) = \frac{1}{K'_s} \log_2(1 + \gamma_{BC}(r)) = \frac{1}{\rho \pi H^2 \tan^2 \Theta} \log_2 \left(1 + \frac{a}{\Theta^2 (H^2 + r^2)} \right)$$

3.2.1 Integration Limits and Sum Rate Derivation

To obtain the total broadcast sum rate $\bar{R}_{BC}(H, \Theta)$, we integrate the individual rates over the uniform continuous user distribution bounded within the circular coverage footprint. We utilize polar coordinates (r, θ_{az}) centered directly beneath the UAV. The azimuth angle θ_{az} spans a full circle $[0, 2\pi]$, and the radius r spans from the center to the edge of the footprint $[0, H \tan \Theta]$:

$$\bar{R}_{BC}(H, \Theta) = \int_0^{2\pi} \int_0^{H \tan \Theta} \rho R_{BC}(r) r dr d\theta_{az}$$

Integrating over the azimuth θ_{az} yields a factor of 2π . Substituting $R_{BC}(r)$ into the expression:

$$\begin{aligned} \bar{R}_{BC}(H, \Theta) &= 2\pi\rho \int_0^{H \tan \Theta} \left[\frac{1}{\rho\pi H^2 \tan^2 \Theta} \log_2 \left(1 + \frac{a}{\Theta^2(H^2 + r^2)} \right) \right] r dr \\ &= \frac{2}{H^2 \tan^2 \Theta} \int_0^{H \tan \Theta} \log_2 \left(1 + \frac{a}{\Theta^2(H^2 + r^2)} \right) r dr \end{aligned}$$

To evaluate this integral, we apply integration by substitution. Let $x = H^2 + r^2$, which gives $dx = 2r dr$. The integration limits transform as follows:

- Lower limit: $r = 0 \implies x = H^2$
- Upper limit: $r = H \tan \Theta \implies x = H^2(1 + \tan^2 \Theta) = \frac{H^2}{\cos^2 \Theta}$

The integral simplifies to:

$$\bar{R}_{BC}(H, \Theta) = \frac{1}{H^2 \tan^2 \Theta} \int_{H^2}^{\frac{H^2}{\cos^2 \Theta}} \log_2 \left(1 + \frac{a/\Theta^2}{x} \right) dx$$

Using the standard integration by parts formula $\int \log_2(1 + \frac{c}{x}) dx = x \log_2(1 + \frac{c}{x}) + c \log_2(x + c)$, with $c = a/\Theta^2$, we evaluate across the boundaries:

$$\begin{aligned} \bar{R}_{BC}(H, \Theta) &= \frac{1}{H^2 \tan^2 \Theta} \left[\frac{H^2}{\cos^2 \Theta} \log_2 \left(1 + \frac{a \cos^2 \Theta}{\Theta^2 H^2} \right) \right. \\ &\quad + \frac{a}{\Theta^2} \log_2 \left(\frac{H^2}{\cos^2 \Theta} + \frac{a}{\Theta^2} \right) - H^2 \log_2 \left(1 + \frac{a}{\Theta^2 H^2} \right) \\ &\quad \left. - \frac{a}{\Theta^2} \log_2 \left(H^2 + \frac{a}{\Theta^2} \right) \right] \end{aligned}$$

Distributing the $\frac{1}{H^2 \tan^2 \Theta}$ term across the evaluated polynomial:

- First term: $\frac{1}{H^2 \tan^2 \Theta} \cdot \frac{H^2}{\cos^2 \Theta} = \frac{1}{\sin^2 \Theta}$
- Third term: $\frac{-H^2}{H^2 \tan^2 \Theta} = \frac{-1}{\tan^2 \Theta}$
- Grouping the second and fourth terms (logarithmic subtraction becomes division):

$$\frac{a}{\Theta^2 H^2 \tan^2 \Theta} \log_2 \left(\frac{\frac{H^2}{\cos^2 \Theta} + \frac{a}{\Theta^2}}{H^2 + \frac{a}{\Theta^2}} \right)$$

Simplifying the argument inside the third logarithm by multiplying the numerator and denominator by $\Theta^2 \cos^2 \Theta$:

$$\frac{\left(\frac{H^2 \Theta^2 + a \cos^2 \Theta}{\Theta^2 \cos^2 \Theta}\right)}{\left(\frac{\Theta^2 H^2 + a}{\Theta^2}\right)} = \frac{\Theta^2 H^2 + a \cos^2 \Theta}{\Theta^2 H^2 \cos^2 \Theta + a \cos^2 \Theta}$$

Bringing all the terms back together successfully yields Equation (8) from the paper:

$$\begin{aligned} \bar{R}_{BC}(H, \Theta) &= \frac{1}{\sin^2 \Theta} \log_2 \left(1 + \frac{a \cos^2 \Theta}{\Theta^2 H^2}\right) - \frac{1}{\tan^2 \Theta} \log_2 \left(1 + \frac{a}{\Theta^2 H^2}\right) \\ &\quad + \frac{a}{\Theta^2 H^2 \tan^2 \Theta} \log_2 \left(\frac{\Theta^2 H^2 + a \cos^2 \Theta}{\Theta^2 H^2 \cos^2 \Theta + a \cos^2 \Theta}\right) \end{aligned}$$

4 Numerical Results and Paper Reproduction

To validate the analytical derivations of the fly-hover-and-communicate protocol, the system parameters were simulated using Python to reproduce the numerical results presented in the reference paper. The system parameters include a total bandwidth $W = 10$ MHz, downlink power $P_d = 10$ dBm, uplink power $P_u = -10$ dBm, noise power spectral density $N_0 = -169$ dBm/Hz, and a base user density $\rho = 0.005$ GTs/m².

Figure 1 illustrates the system performance across the three communication models:

- **Downlink Multicasting:** As altitude H increases, the multicast sum rate $\bar{R}_{MC}$ strictly increases. The optimal beamwidth Θ_{MC}^* maximizing the rate is shown to be non-increasing with H .
- **Downlink Broadcasting:** The broadcast sum rate $\bar{R}_{BC}$ decreases with both altitude H and beamwidth Θ . This confirms the analytical conclusion that smaller altitudes and narrower beams are desirable for maximizing broadcast throughput.
- **Uplink Multiple Access:** The MAC sum rate $\bar{R}_{MAC}$ is completely independent of the UAV altitude H . Furthermore, the optimal beamwidth Θ_{MAC}^* remains effectively constant at approximately 1.3195 rad regardless of variations in user density ρ .

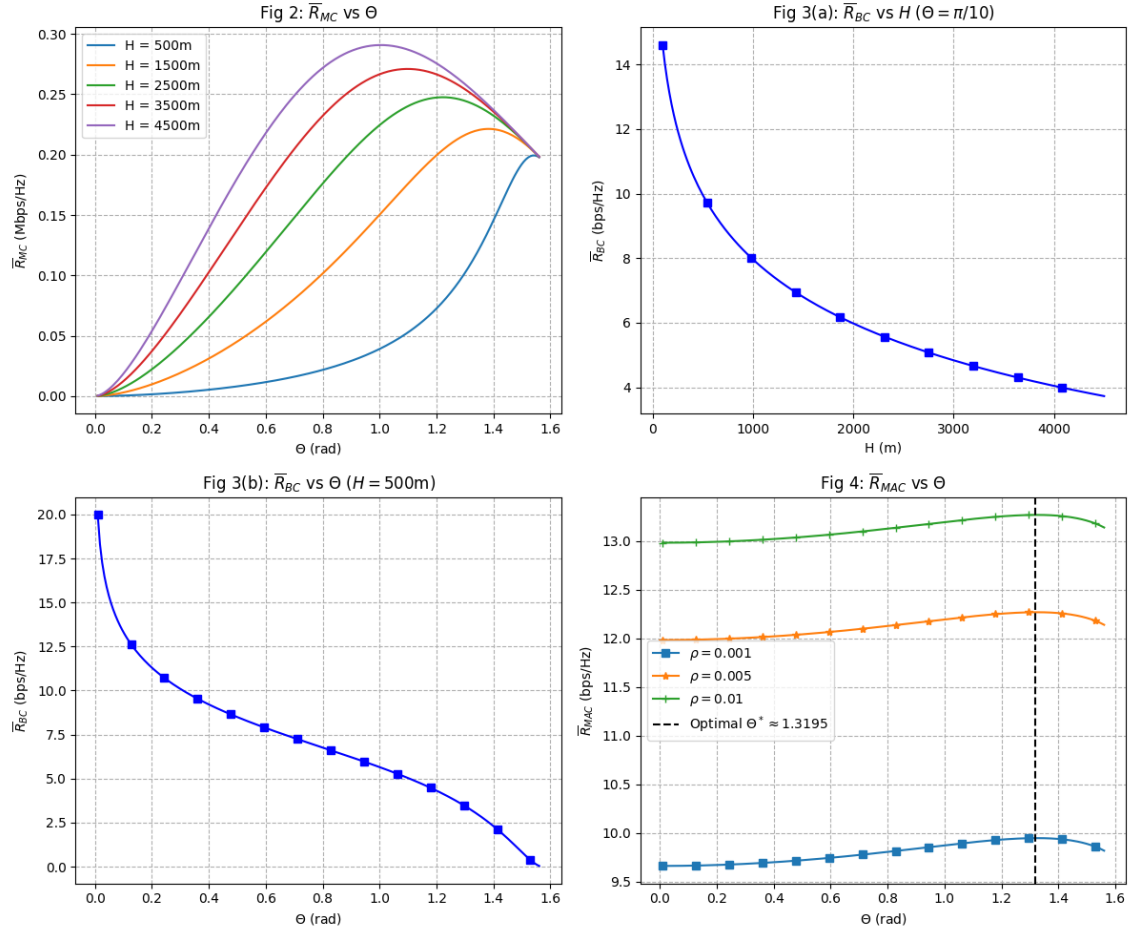


Figure 1: Reproduction of paper results: Multicast rate vs. Θ (top-left), Broadcast rate vs. H and Θ (top-right, bottom-left), and Uplink MAC rate vs. Θ (bottom-right).

5 References

1. H. He, S. Zhang, Y. Zeng and R. Zhang, “Joint Altitude and Beamwidth Optimization for UAV-Enabled multiuser Communications,” in *IEEE Communications Letters*, vol. 22, no. 2, pp. 344-347, Feb. 2018, doi: 10.1109/LCOMM.2017.2772254.
2. Course material from UAV13: Advanced Topics in Wireless Communications, Aristotle University of Thessaloniki (AUTH), 2026