


Closing the system

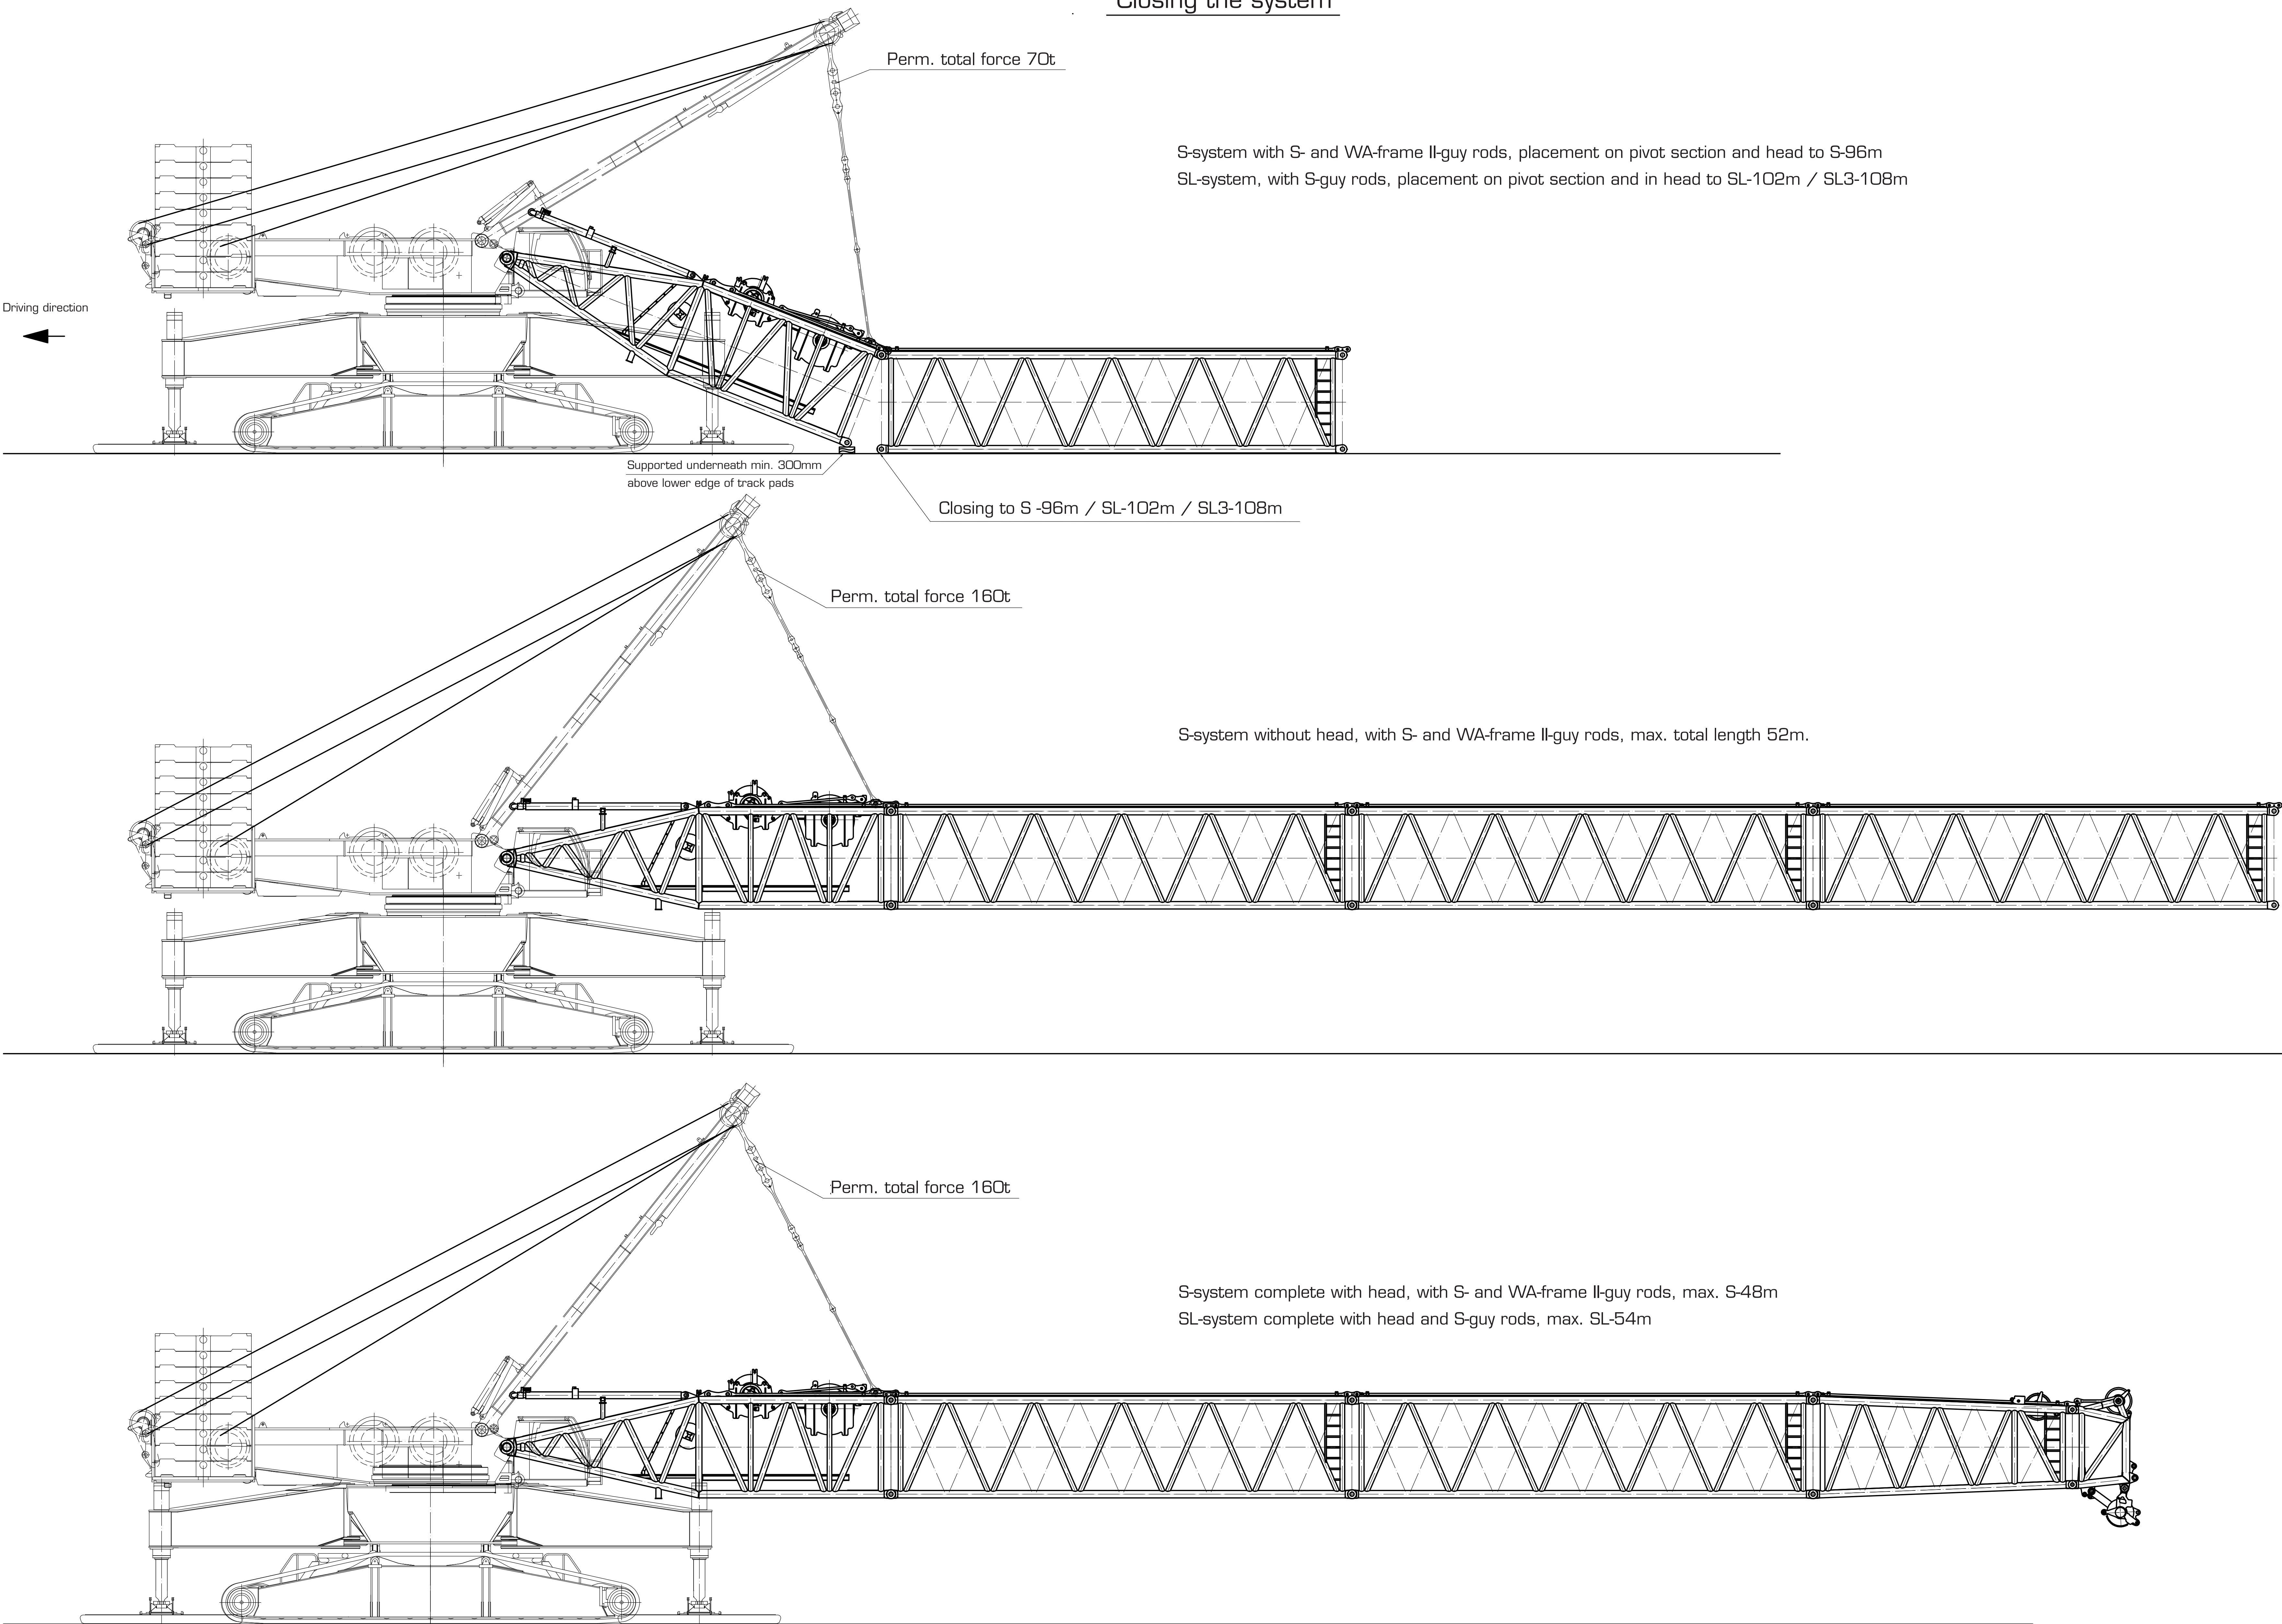


Caution Assembly note:


- Support base and ballast according to erection chart according to boom length
- Turntable set against travel direction or sideways
- S-pivot section supported underneath to min. 300mm above lower edge of track pads - S-pivot section supported underneath to min. 300mm above lower edge of track pads
- Assembly without hook block

For support base 17m x 10m pay attention to danger of collision of S-pivot section with support


Statically checked:	Administrator	Date	Name
	Department manager		
	Comment:		

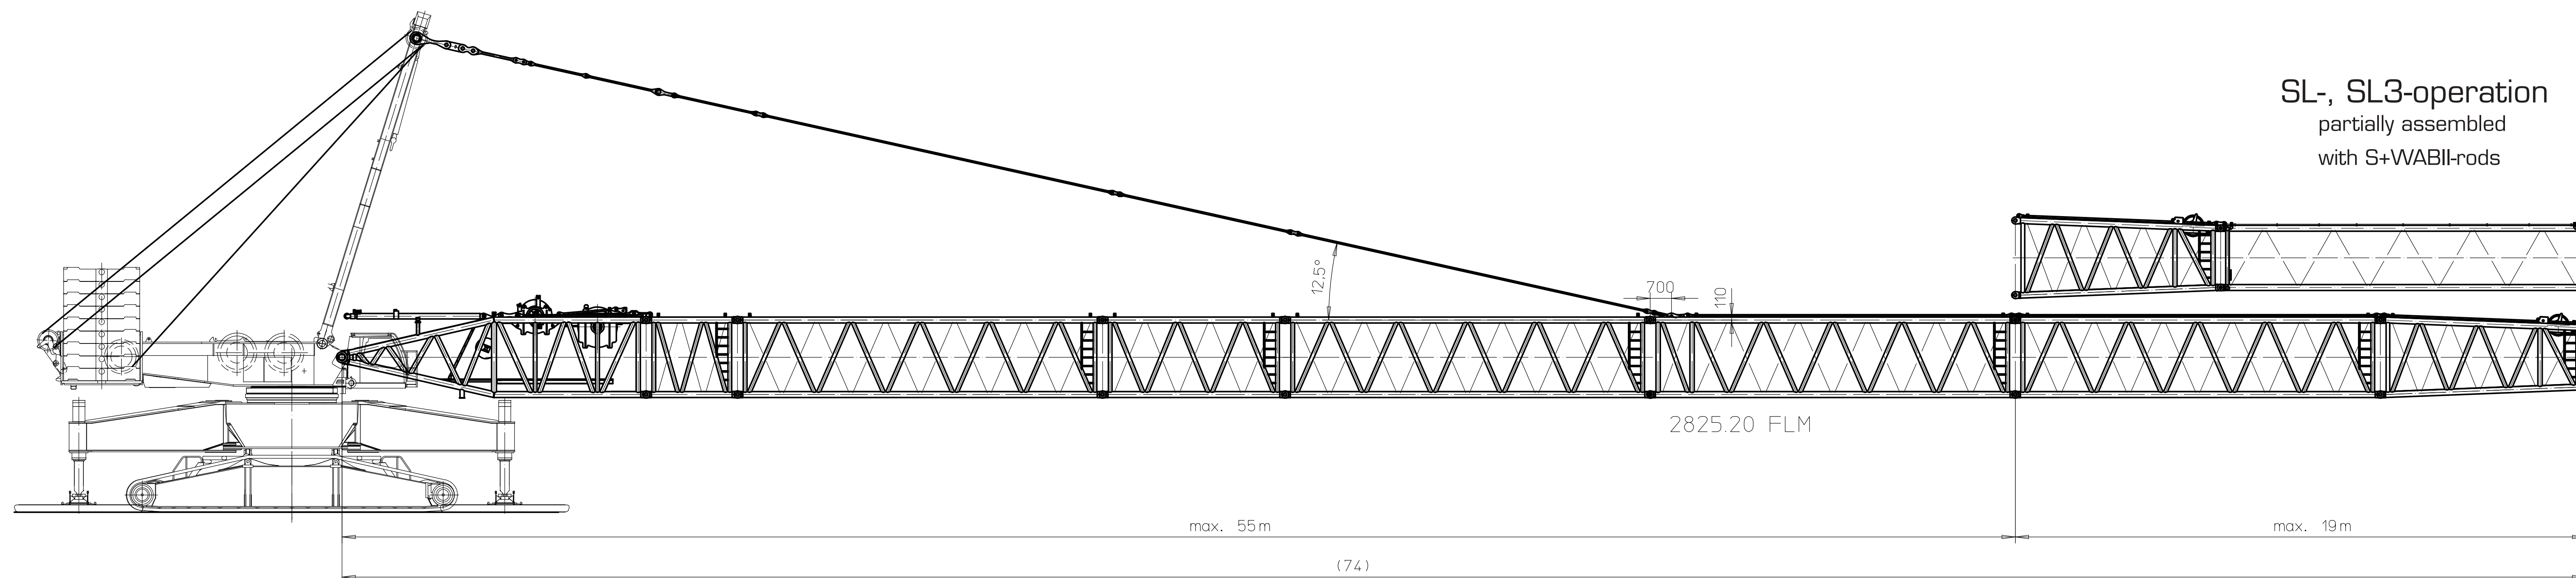


SL-, SL3-operation
partially assembled
with S+WABII-rods

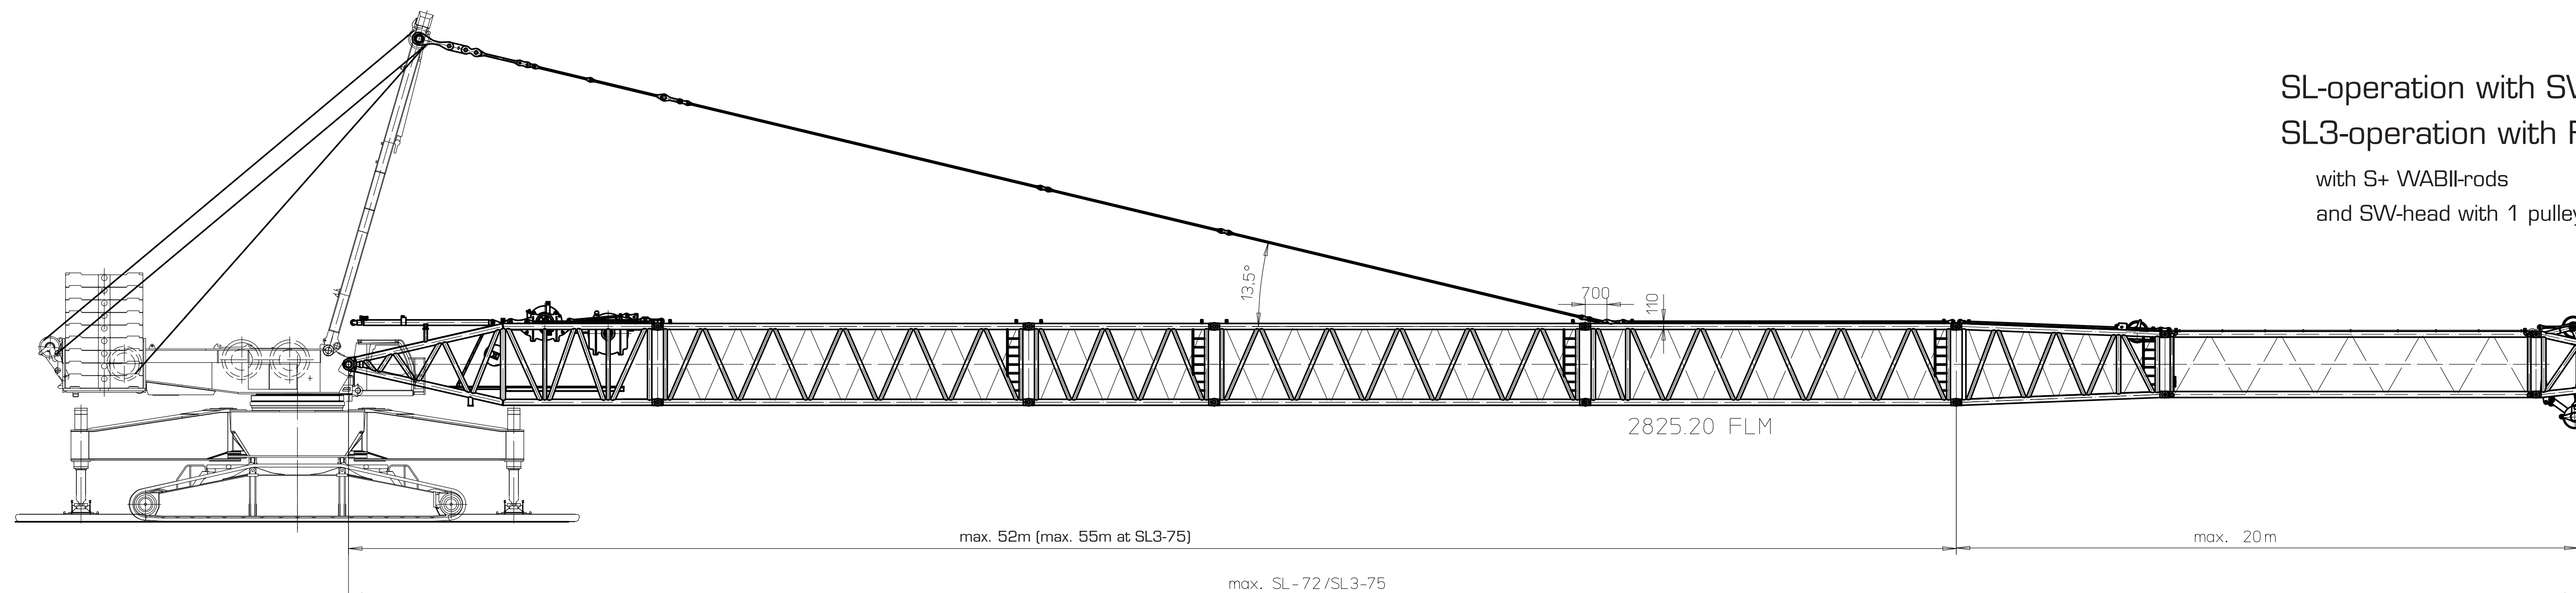

SL-operation with SW-head
SL3-operation with F-adapter
with S+ WABII-rods
and SW-head with 1 pulley set or F-adapter

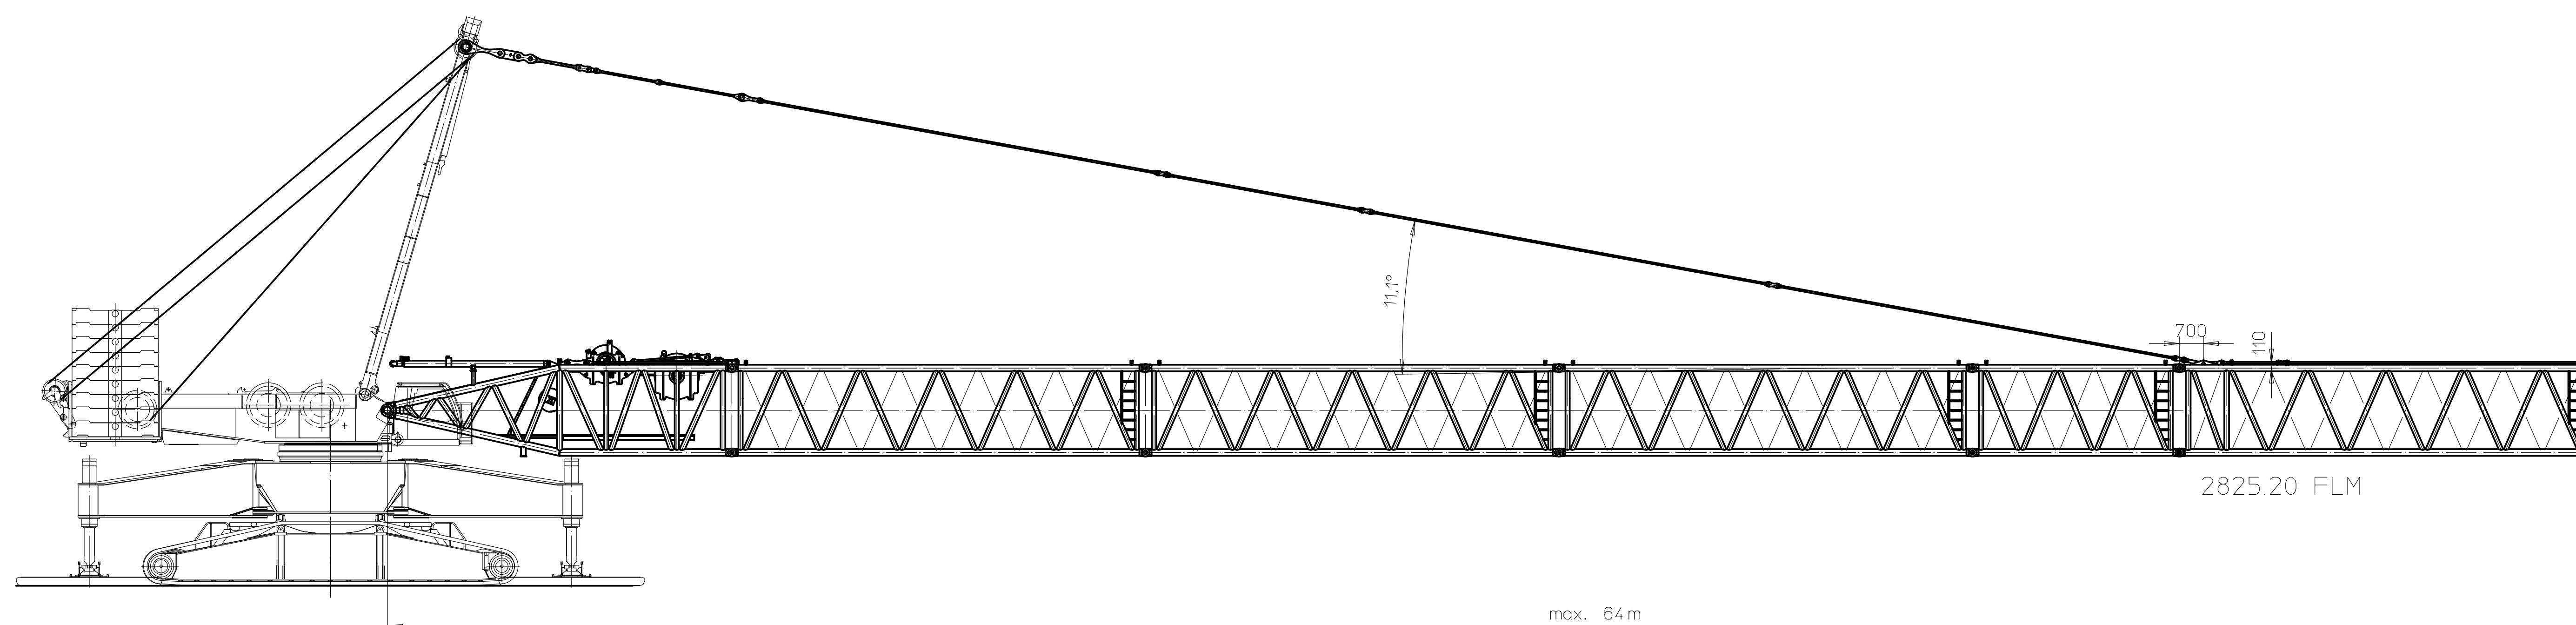

S-operation
partially assembled
with S+WABII-rods

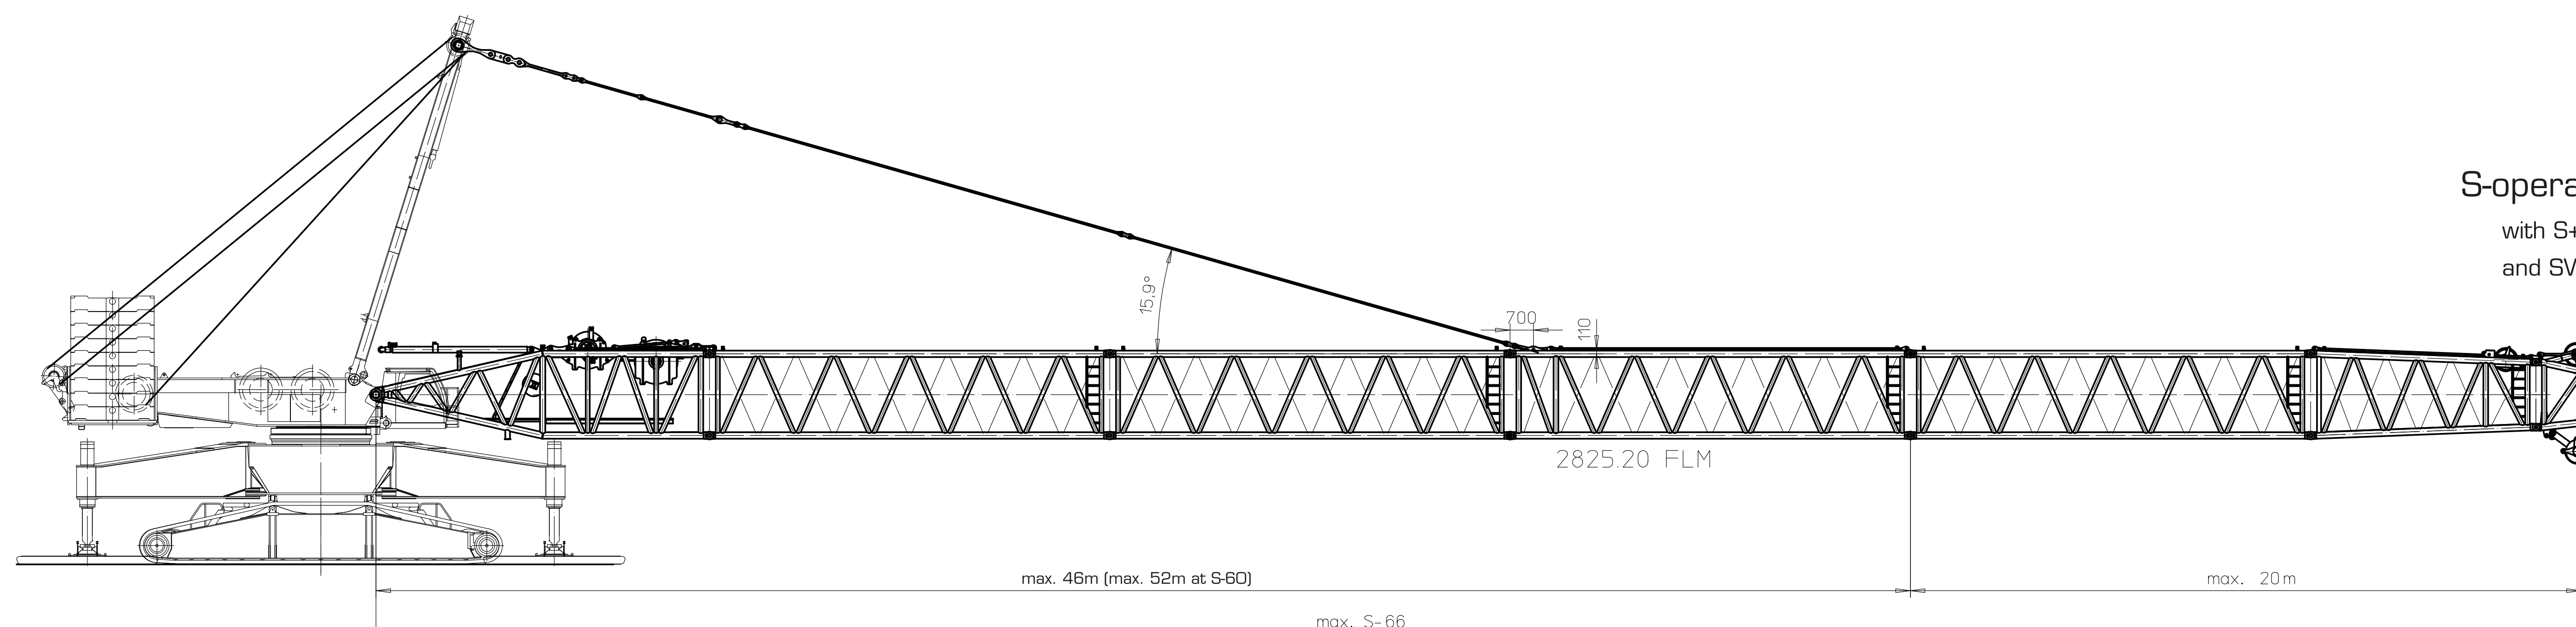

S-operation with SW-head
with S+WABII-rods
and SW-head with 2 pulley sets

Caution Assembly note:
- Support base and ballast according to erection chart
according to boom length
- Turntable set against travel direction or sideways
- Assembly without hook block