



SLD-operation with SW-head
with S+WABII-rods
and SW-head with 1 pulley set

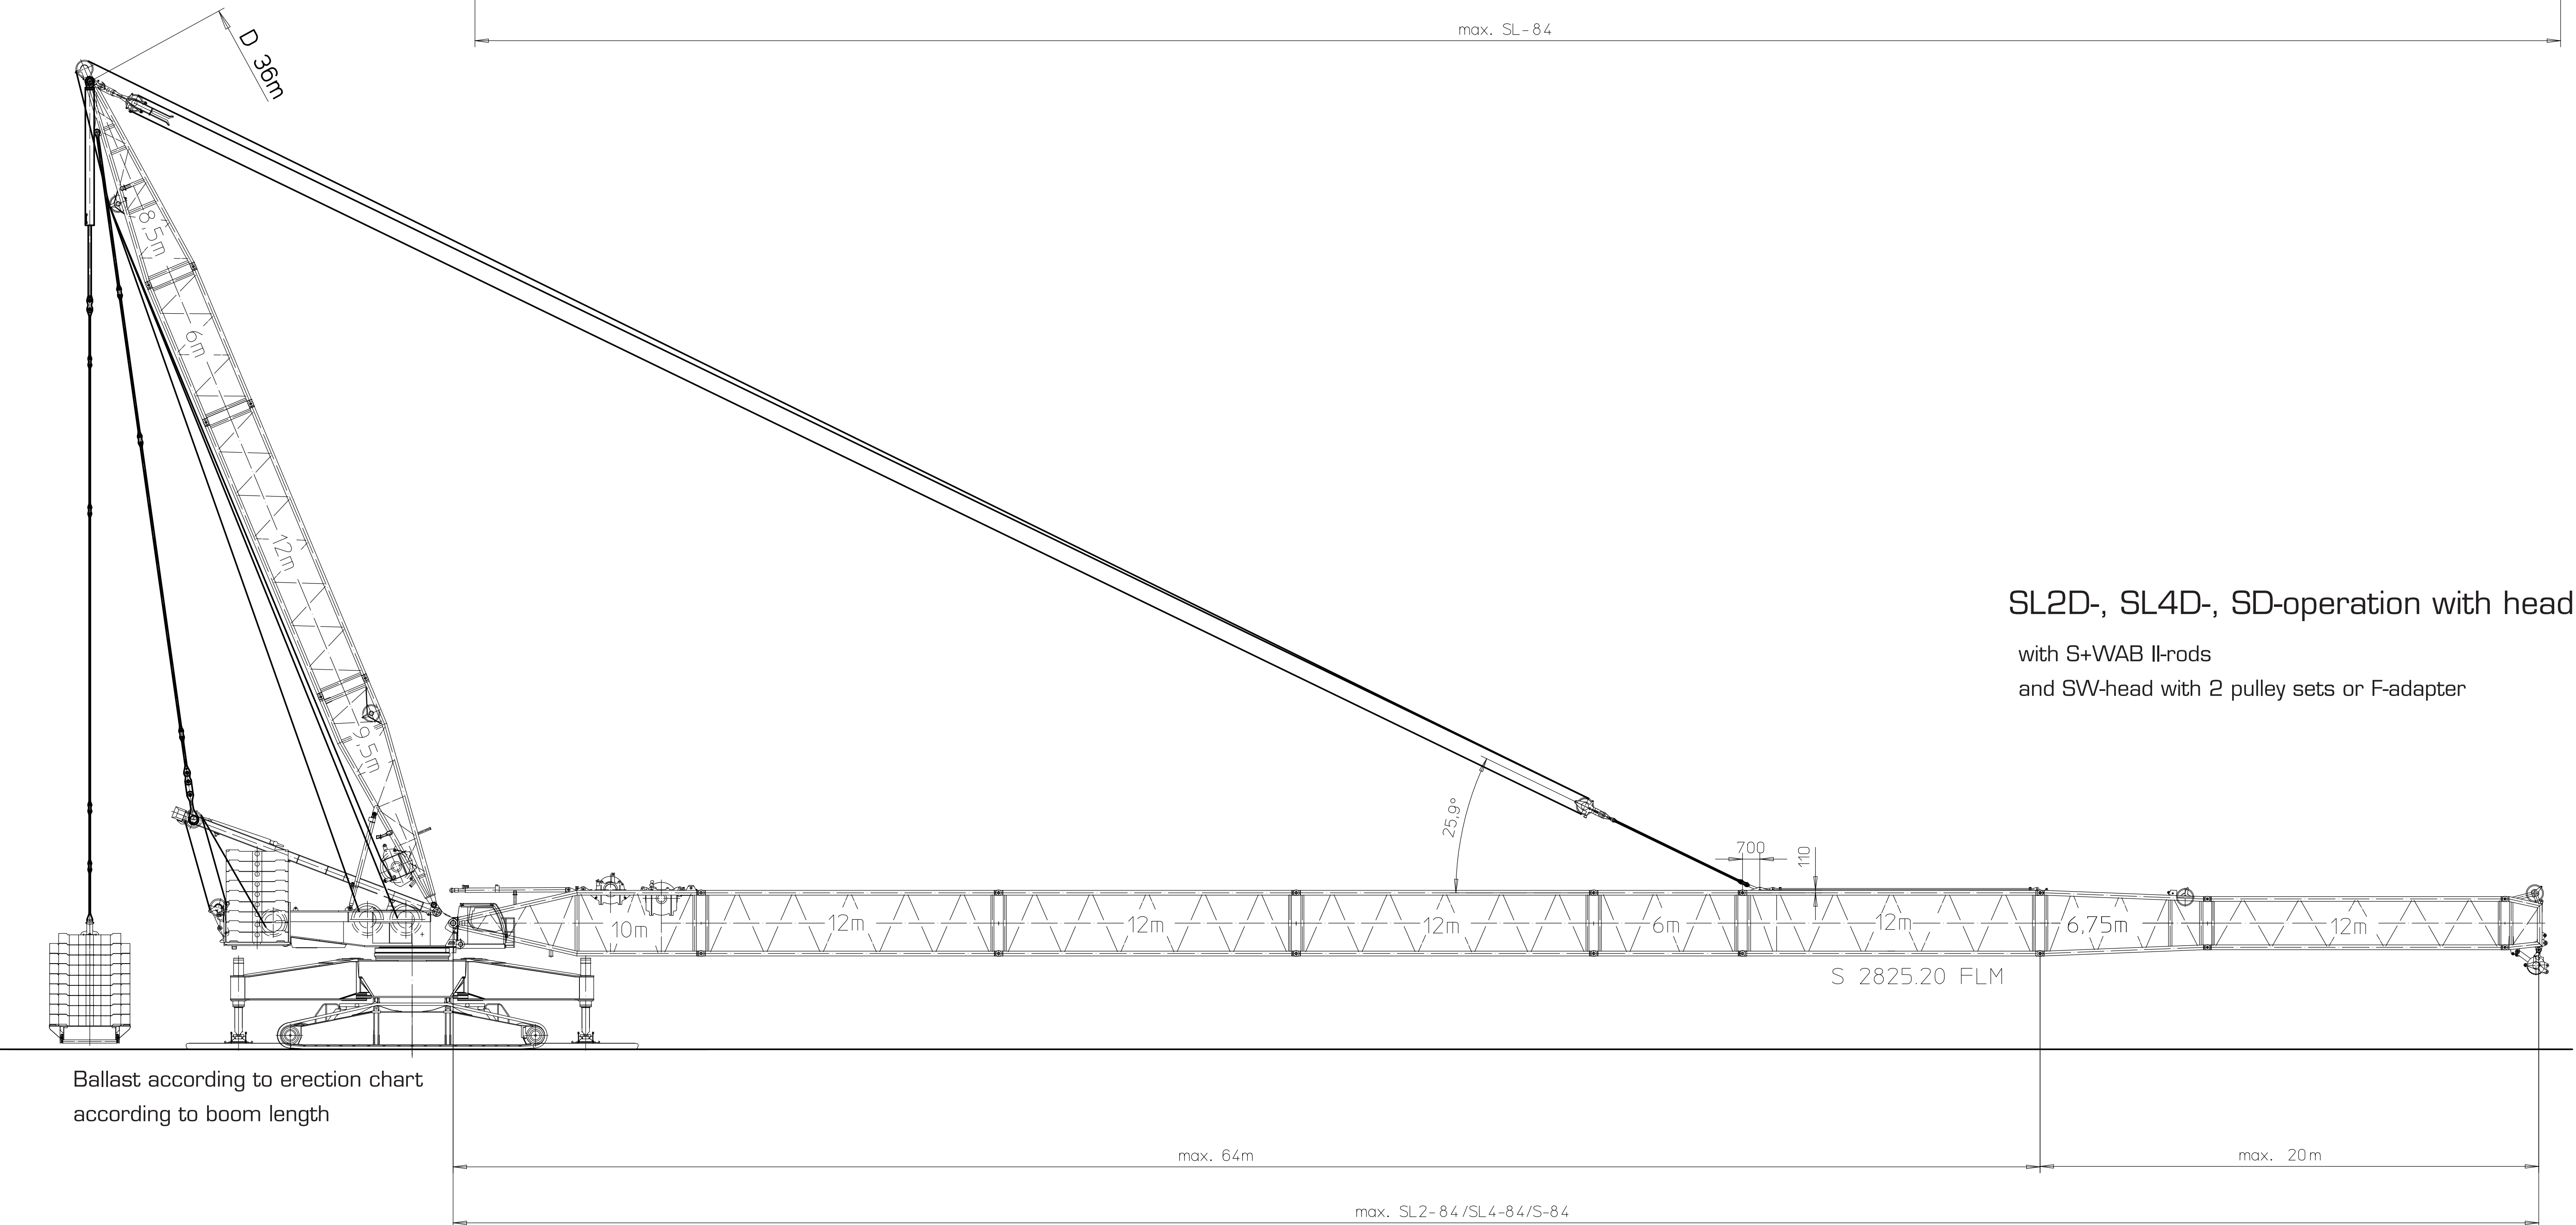


SL2D-, SL4D-, SD-operation with head
with S+WAB II-rods
and SW-head with 2 pulley sets or F-adapter

Assembly without hook block

Statically checked:	Administrator	Date	Name
	Department		
	Manager		
Comment:			

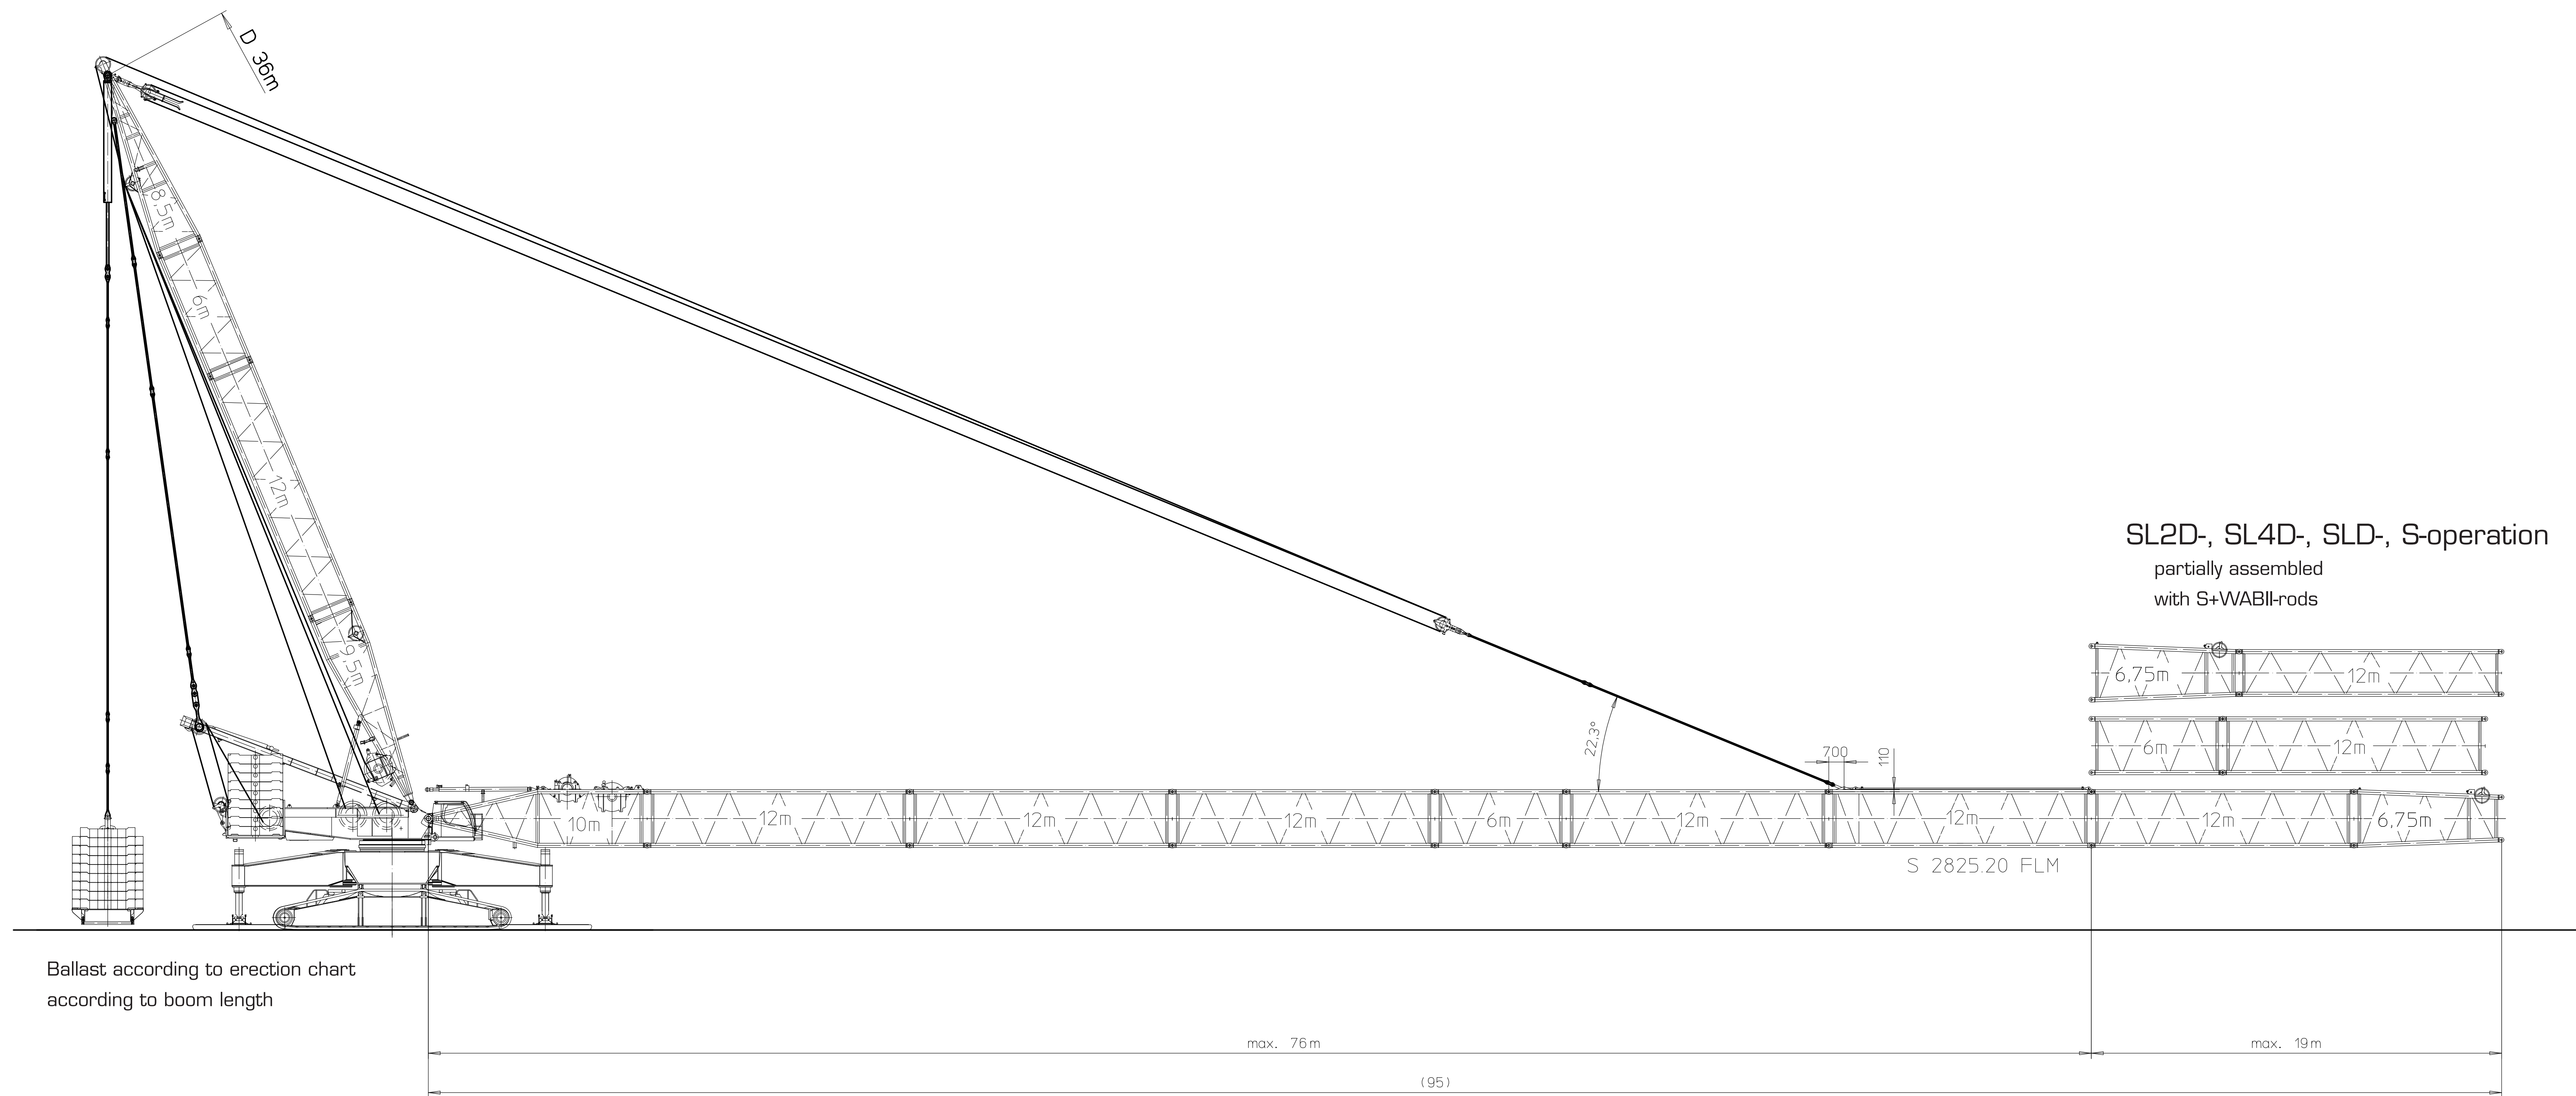

SL2D-, SL4D-, SLD-, S-operation
partially assembled
with S+VWABII-rods

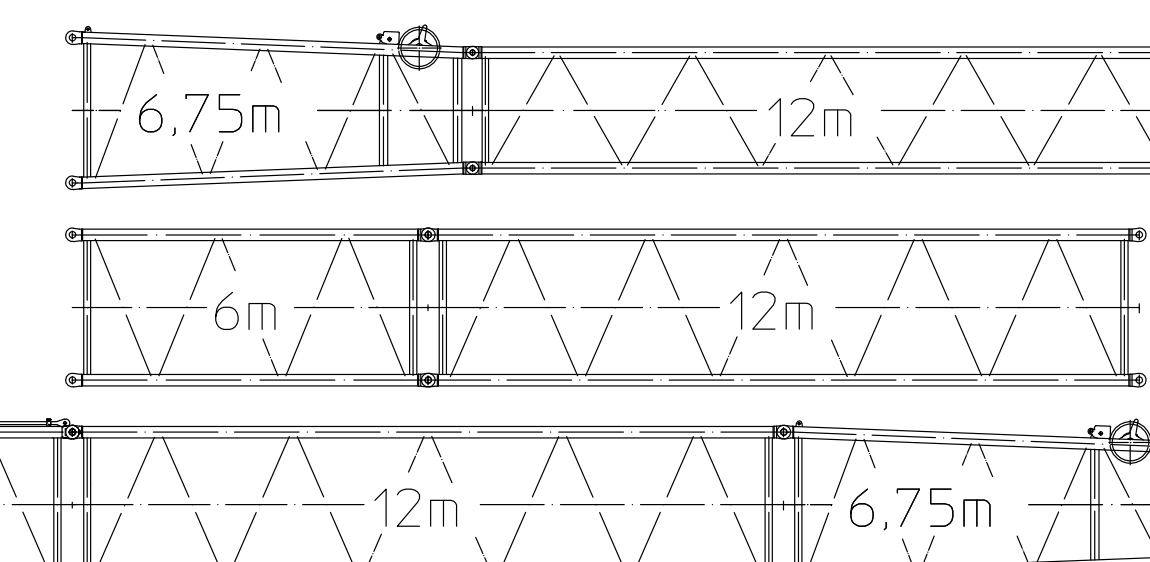

S 2825.20 FLM

max. 76 m

(95)

max. 19 m