




Place crawler carrier 1 on the ground.

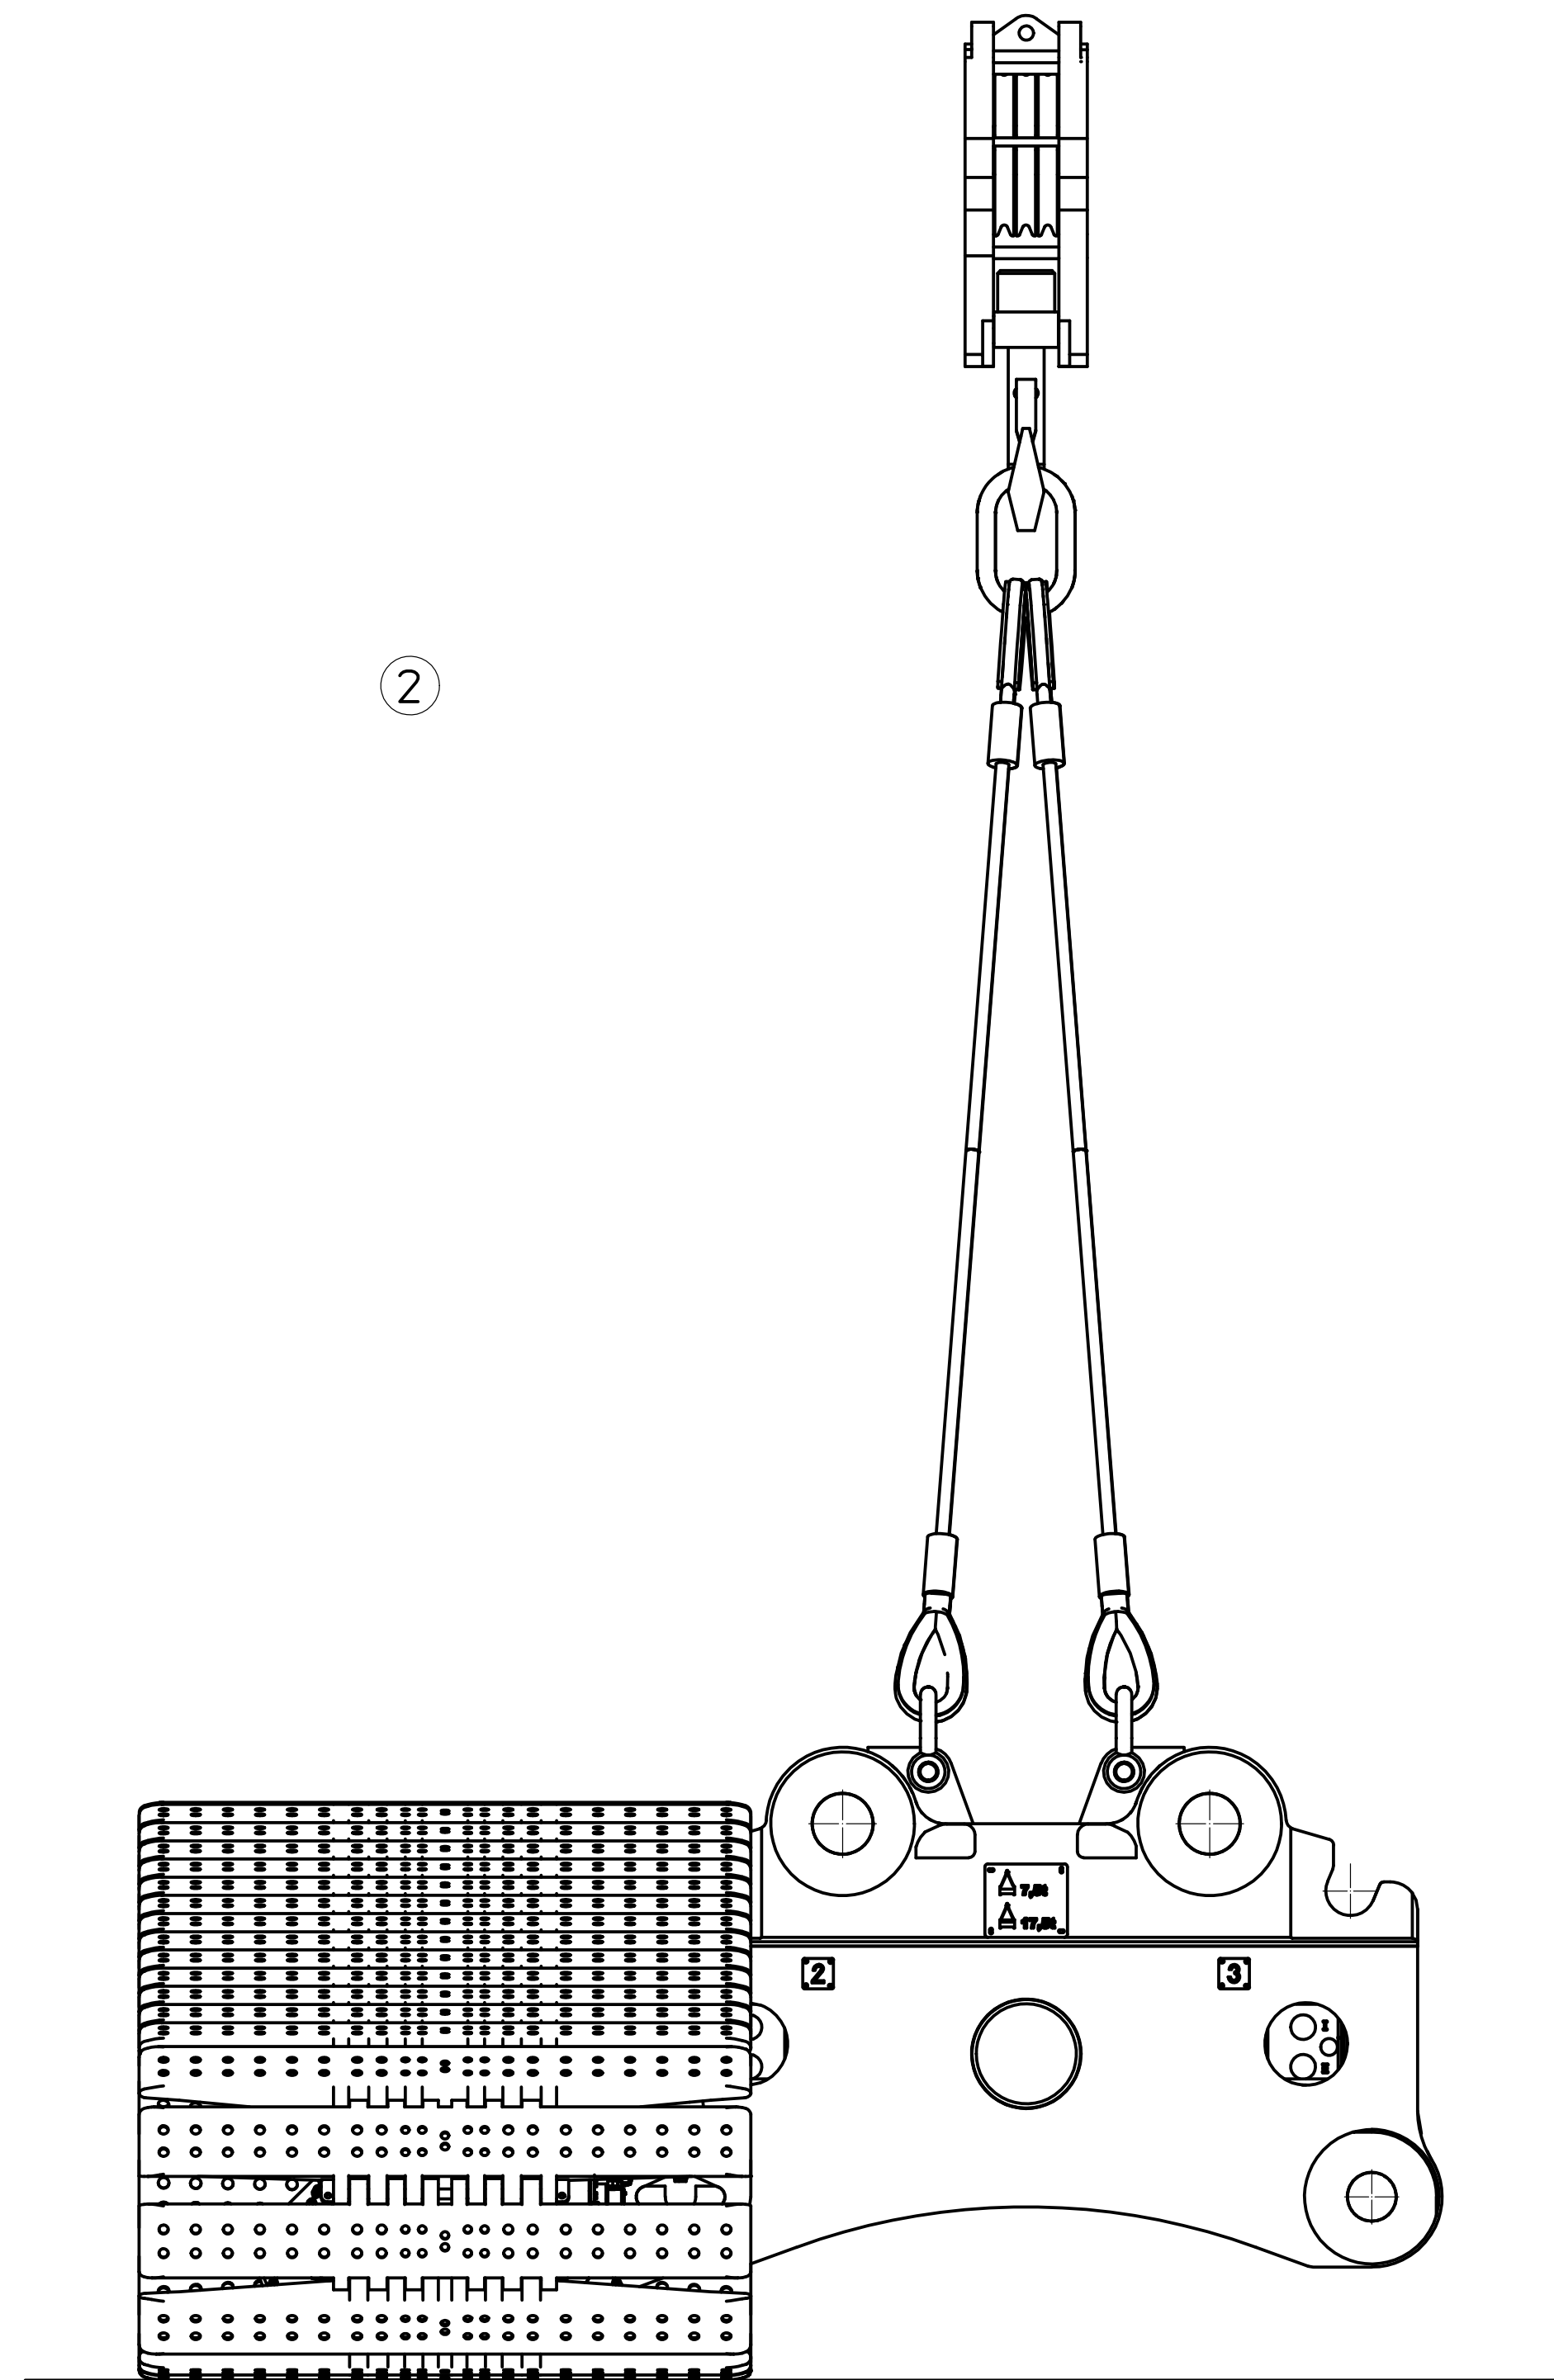

Install center section on crawler carrier.

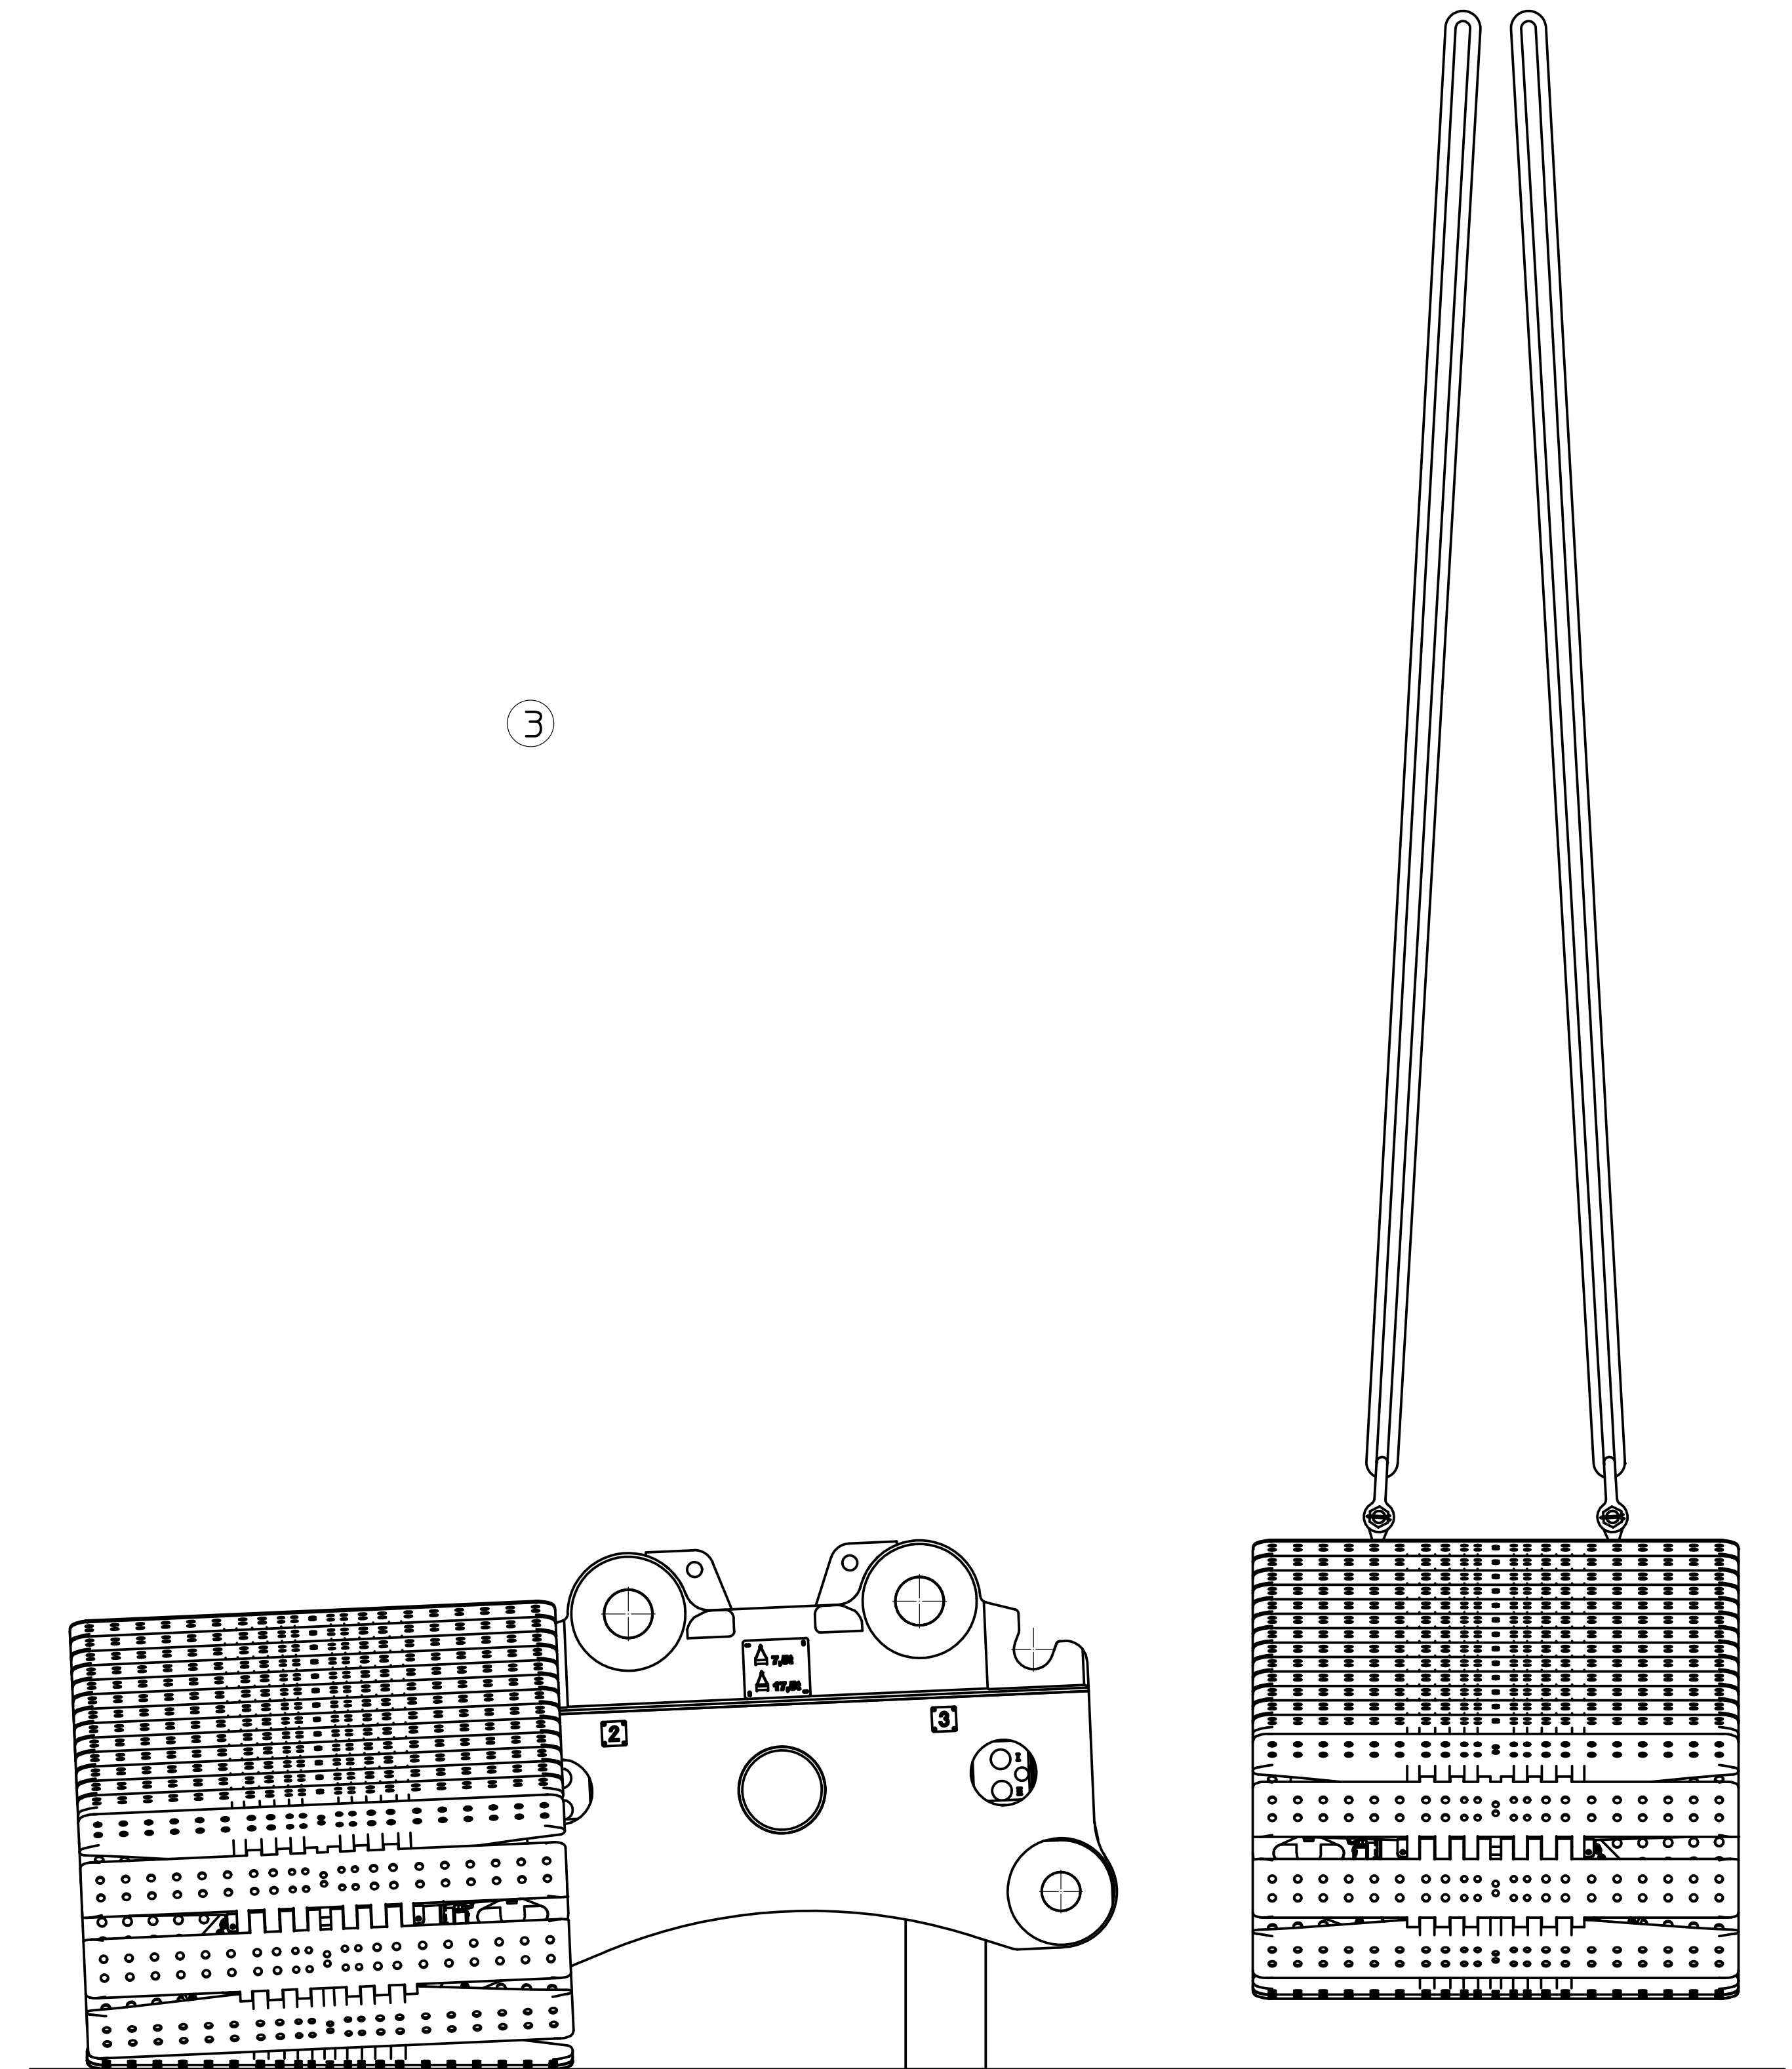

Slant and support center section and crawler carrier 1 from below.

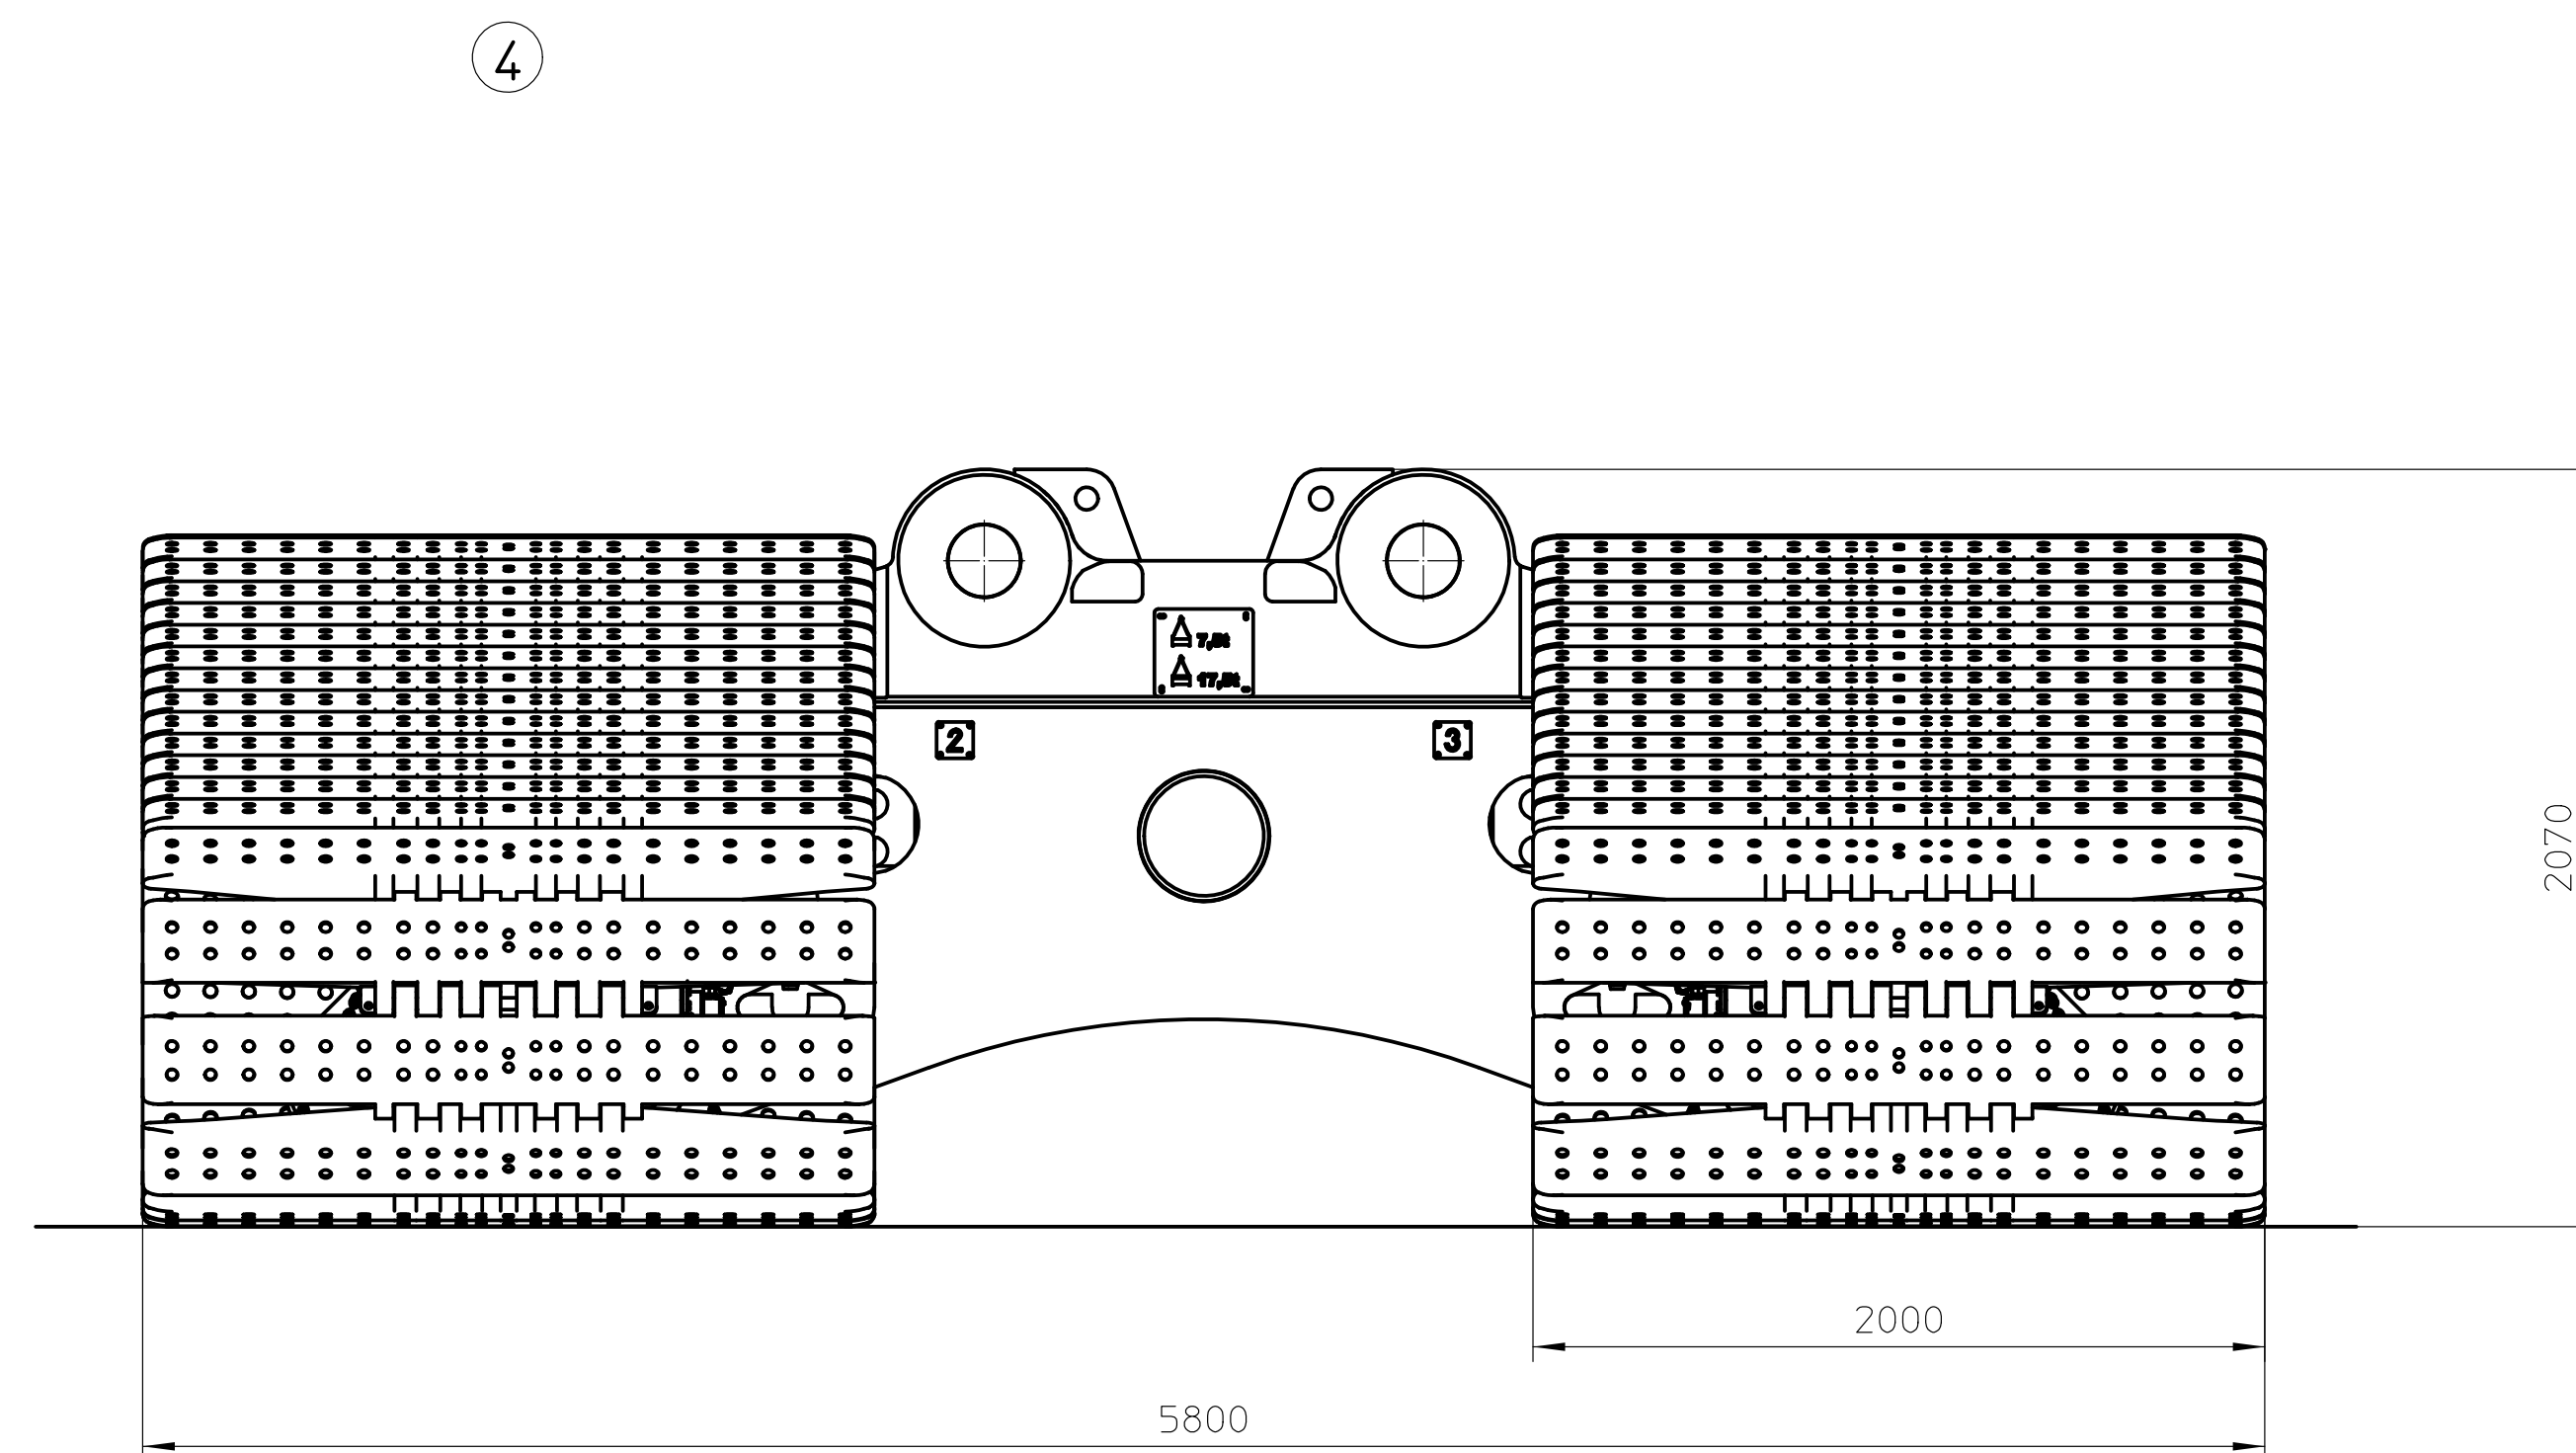

Install crawler carrier 2 and remove support.

Page 1 of 1

U(m)= F(m2)=

kg

LWE_CAD

| 2009/10/22 | twgrb3 |

1:20

ASSEMBLY CRAWLER

1666-720.00.01.002- 000

988070408