


As of a boom length of 132m, close boom on the auxiliary guying. If the lower pins can be plugged during closing, support must take place so that the max. distance to the stack is 0.9m.

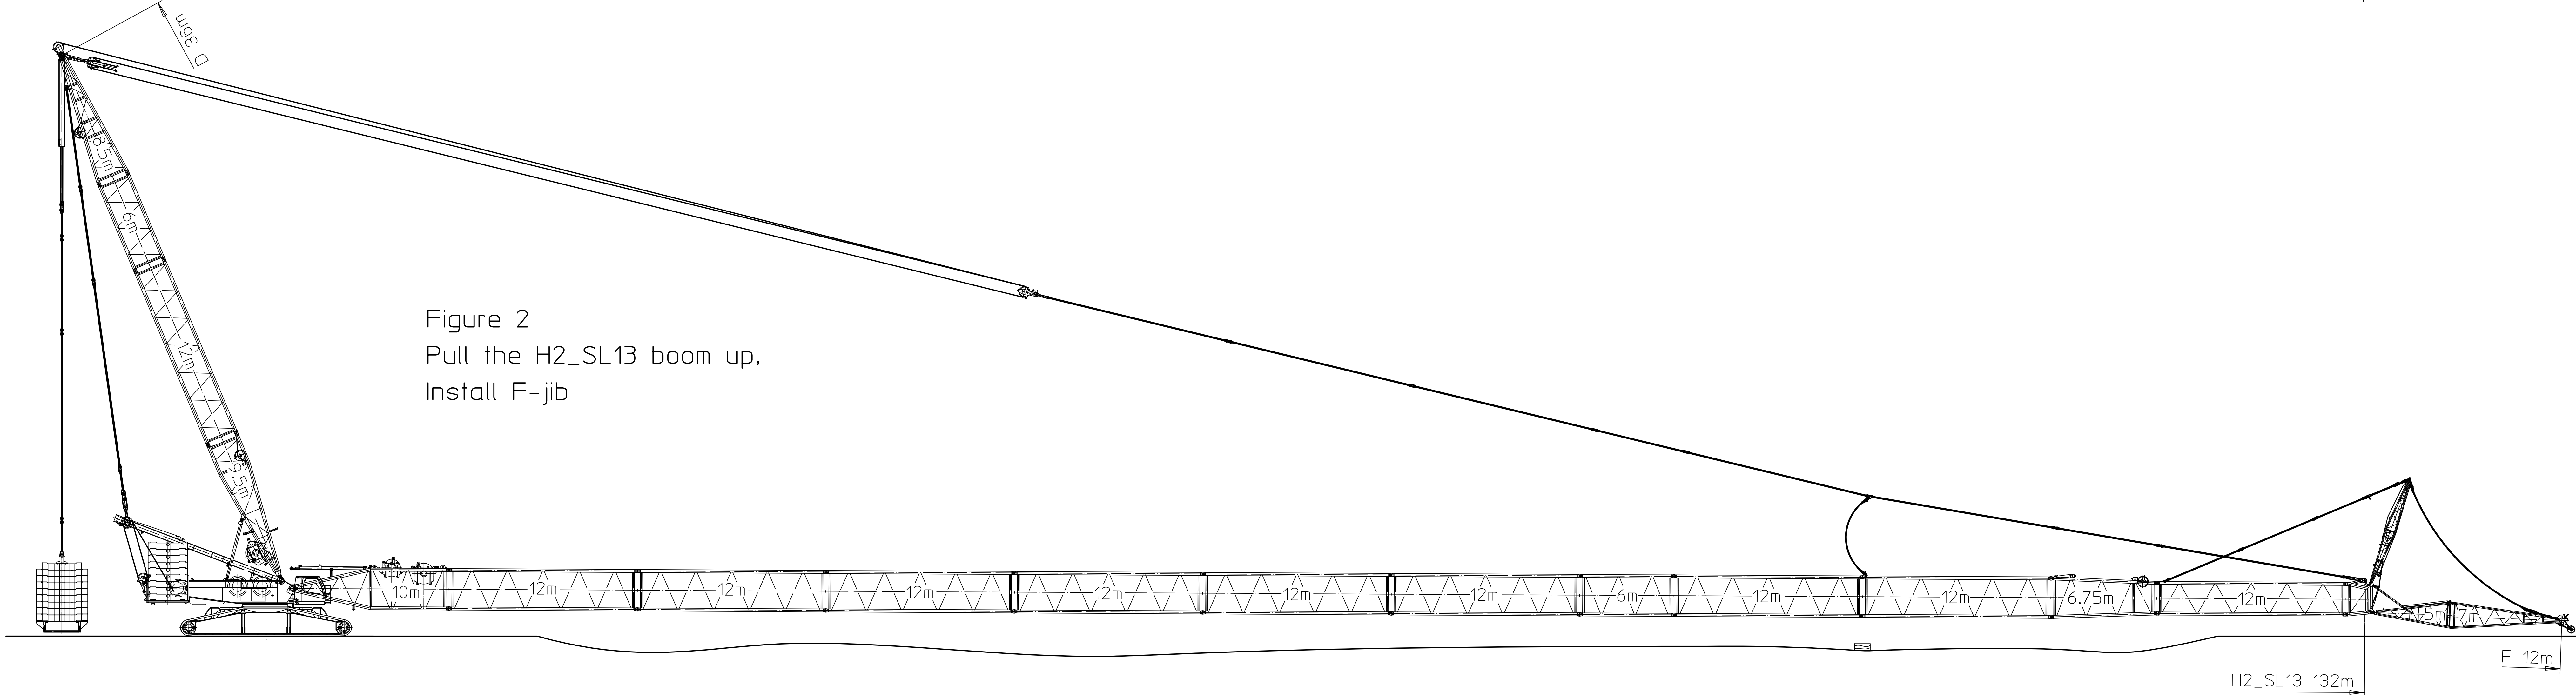

Support H2_SL13DFB/B2

Static inspected	Administrator	Date	Name	Signature
	Team leader			
	Dep. manager		Henkel	
Comment:				

Fertiggewicht/Weight/Poids		Tolerierung Tolerance tolérance	ISO 8015	Weitere Anforderungen siehe Teilleistungs- further specifications see parts master record autres spécifications cf. nomenclature
Dokumentation Distribution Documentation		Rechtbearbeitung rectifying rectifying technique	ISO 2768-mk	
Bearbeitung/Finish/Usinage		Schweißkonstruktionen welded structure Constructions soudées	ISO 13920 BF	
Projektion E		Datum Date/Date	Name Name/Non	Für die Herstellung der Liefergegenstände gültig for the delivery of all items the master documents apply
1:150		06.03.2017	SAR	Les documents de fabrication appliqués à tous les réflecteurs de l'usine de fabrication
Bezeichnung/Description/Dénomination		Zeilungs Nr./Drawing No./N° de dessin		
ASSEMBLY DRAWING		1666-720.00.03.028-000		
H2_SL13.SUBSTRUCTURE		Ident Nr./Ident No./N° d'ident		
		9803 3048		