

Fig.1 – For assembly on supports, the SA-frame must be positioned vertically!  
Fig.2 – When winches 1+2 with rope are installed,  
or winch 1 with rope is installed, then the SA-frame  
can also be placed down on supports.



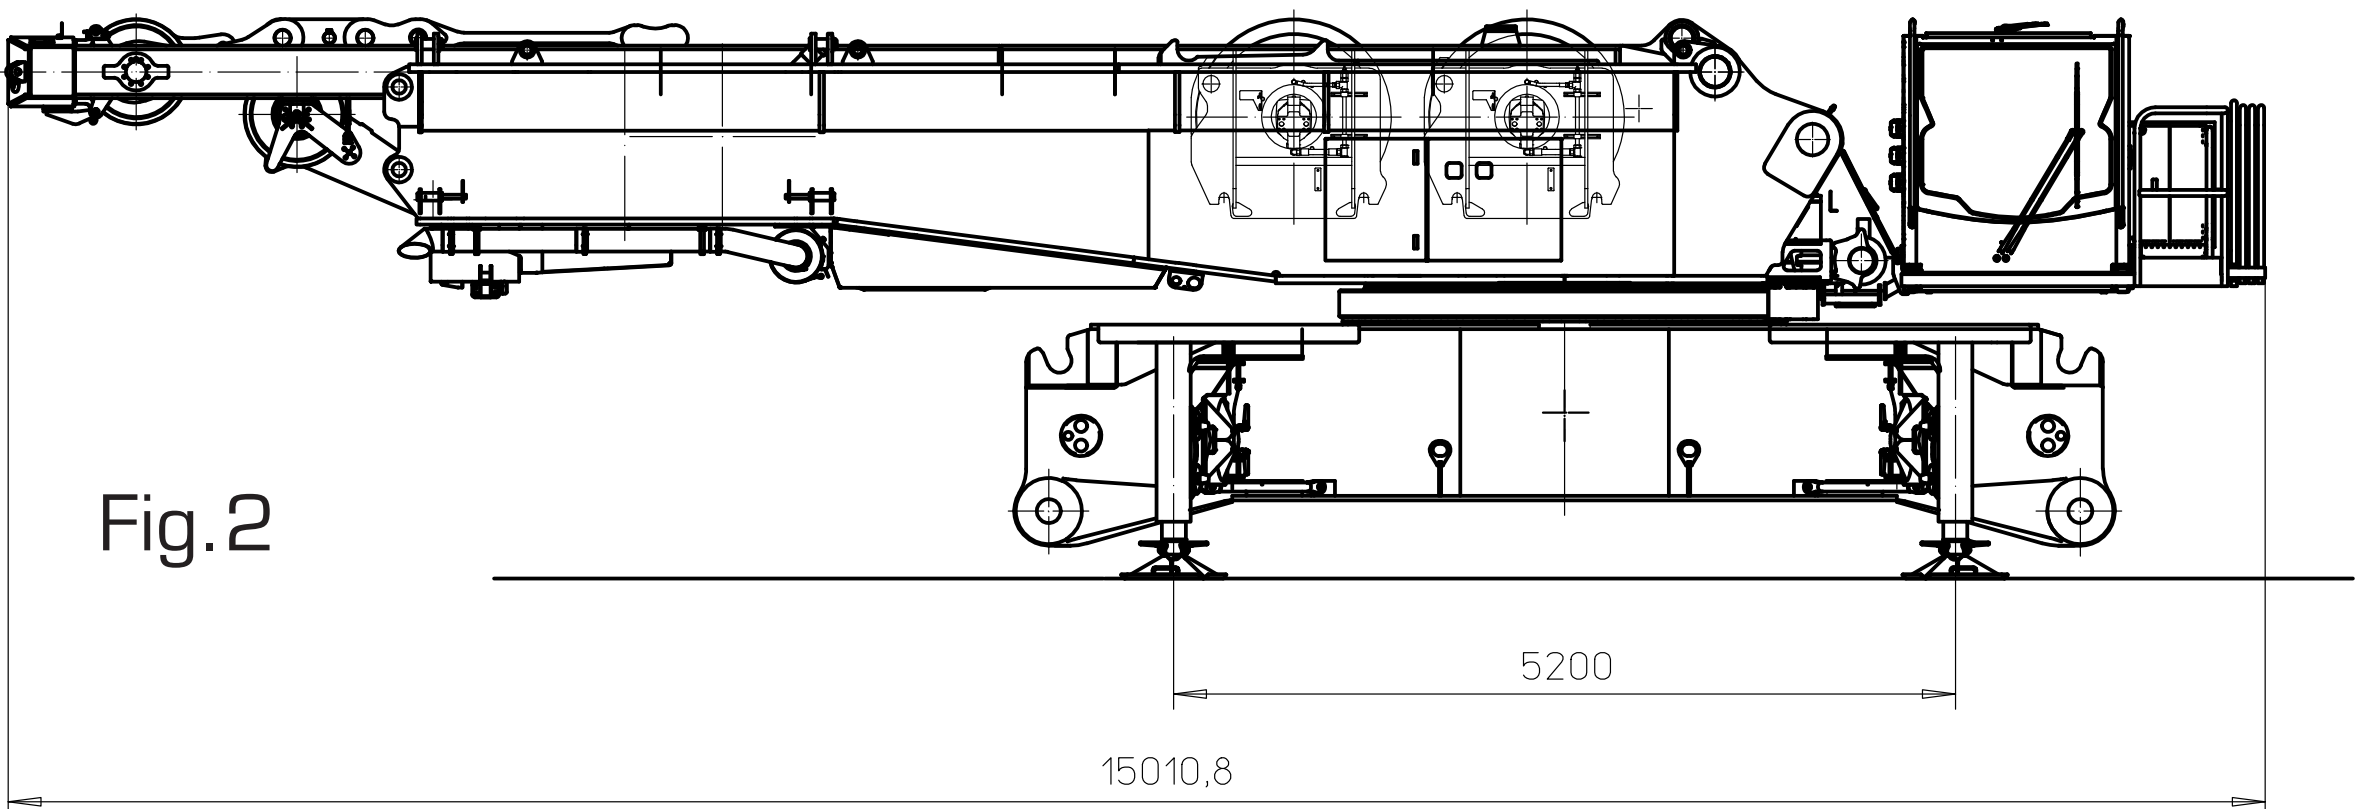


Fig.3 – For supported assembly, the SA-frame can be placed down, however the turntable may not be turned - Danger of tipping!

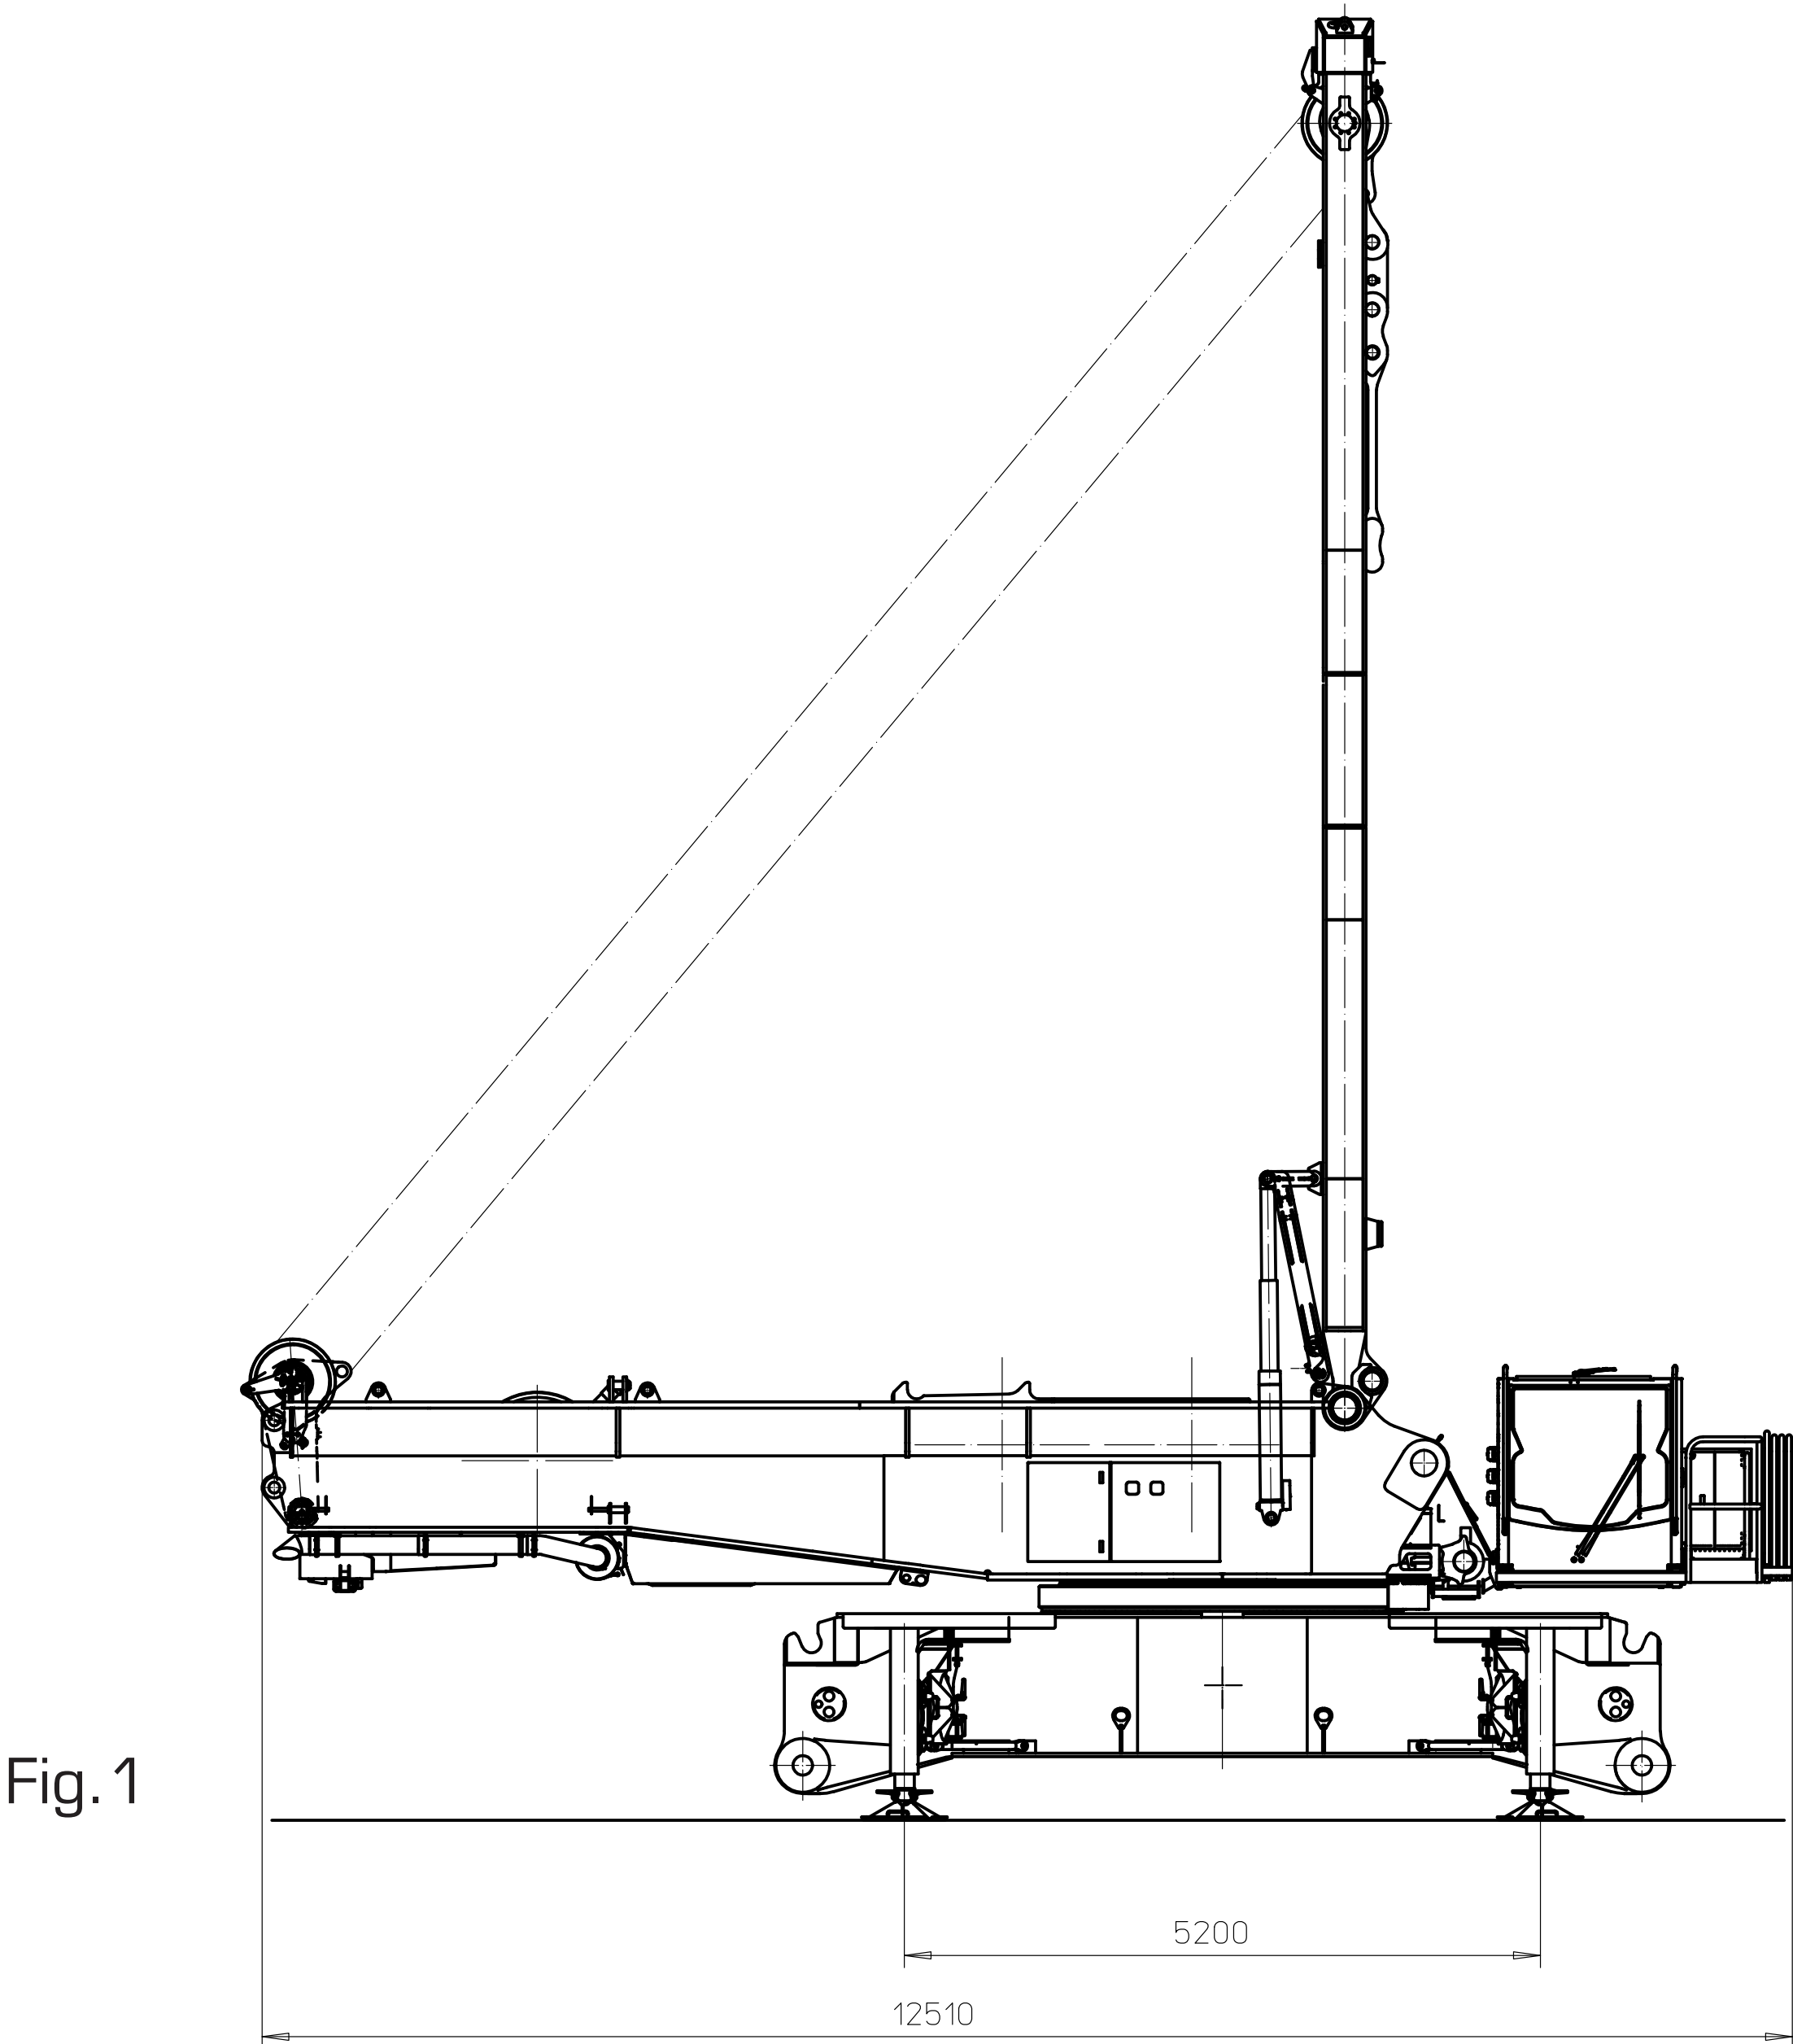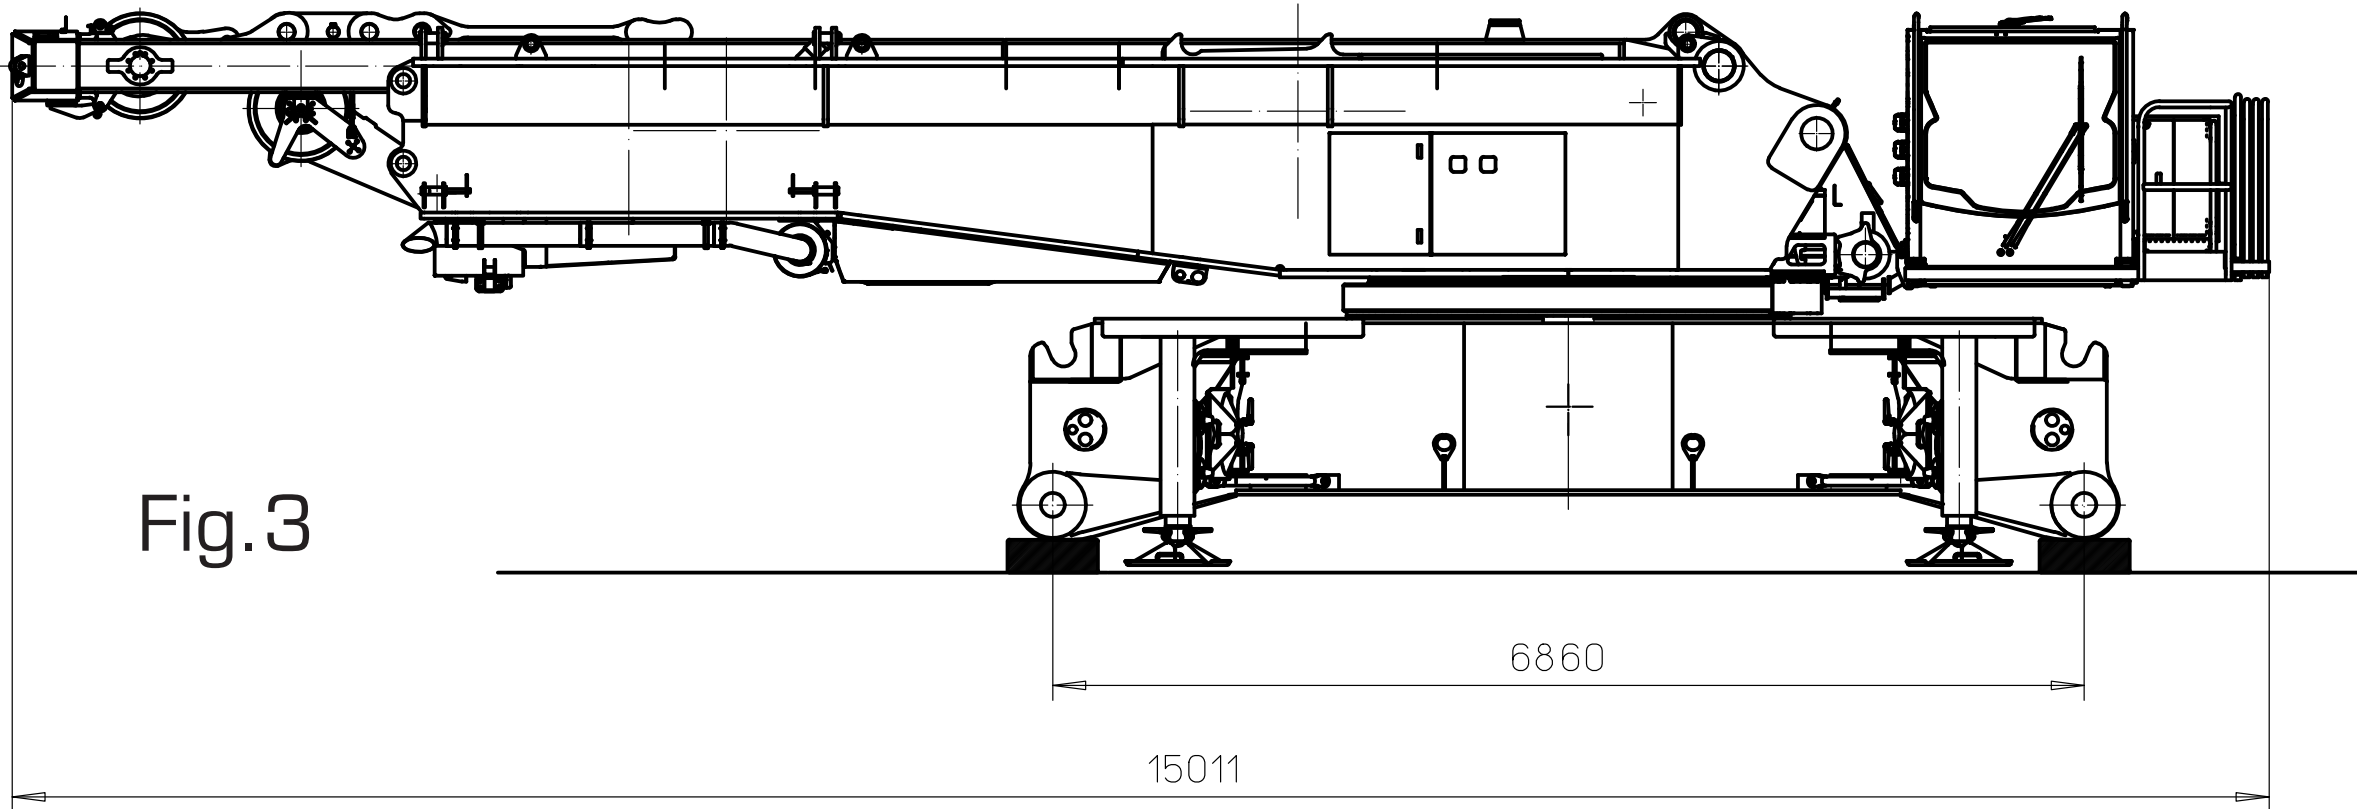

Applies for with or without Quick Connection

965222008 Assembly drawing Turntable

LWE\_CAD

06.12.2007 KAU

Statically checked:	Administrator	Date	Name
	Department manager		
Comment:			

ASSEMBLY  
ON SUPPORTS

1666-720.00.02.002-001  
9863 915 08