



1

Driving direction
←

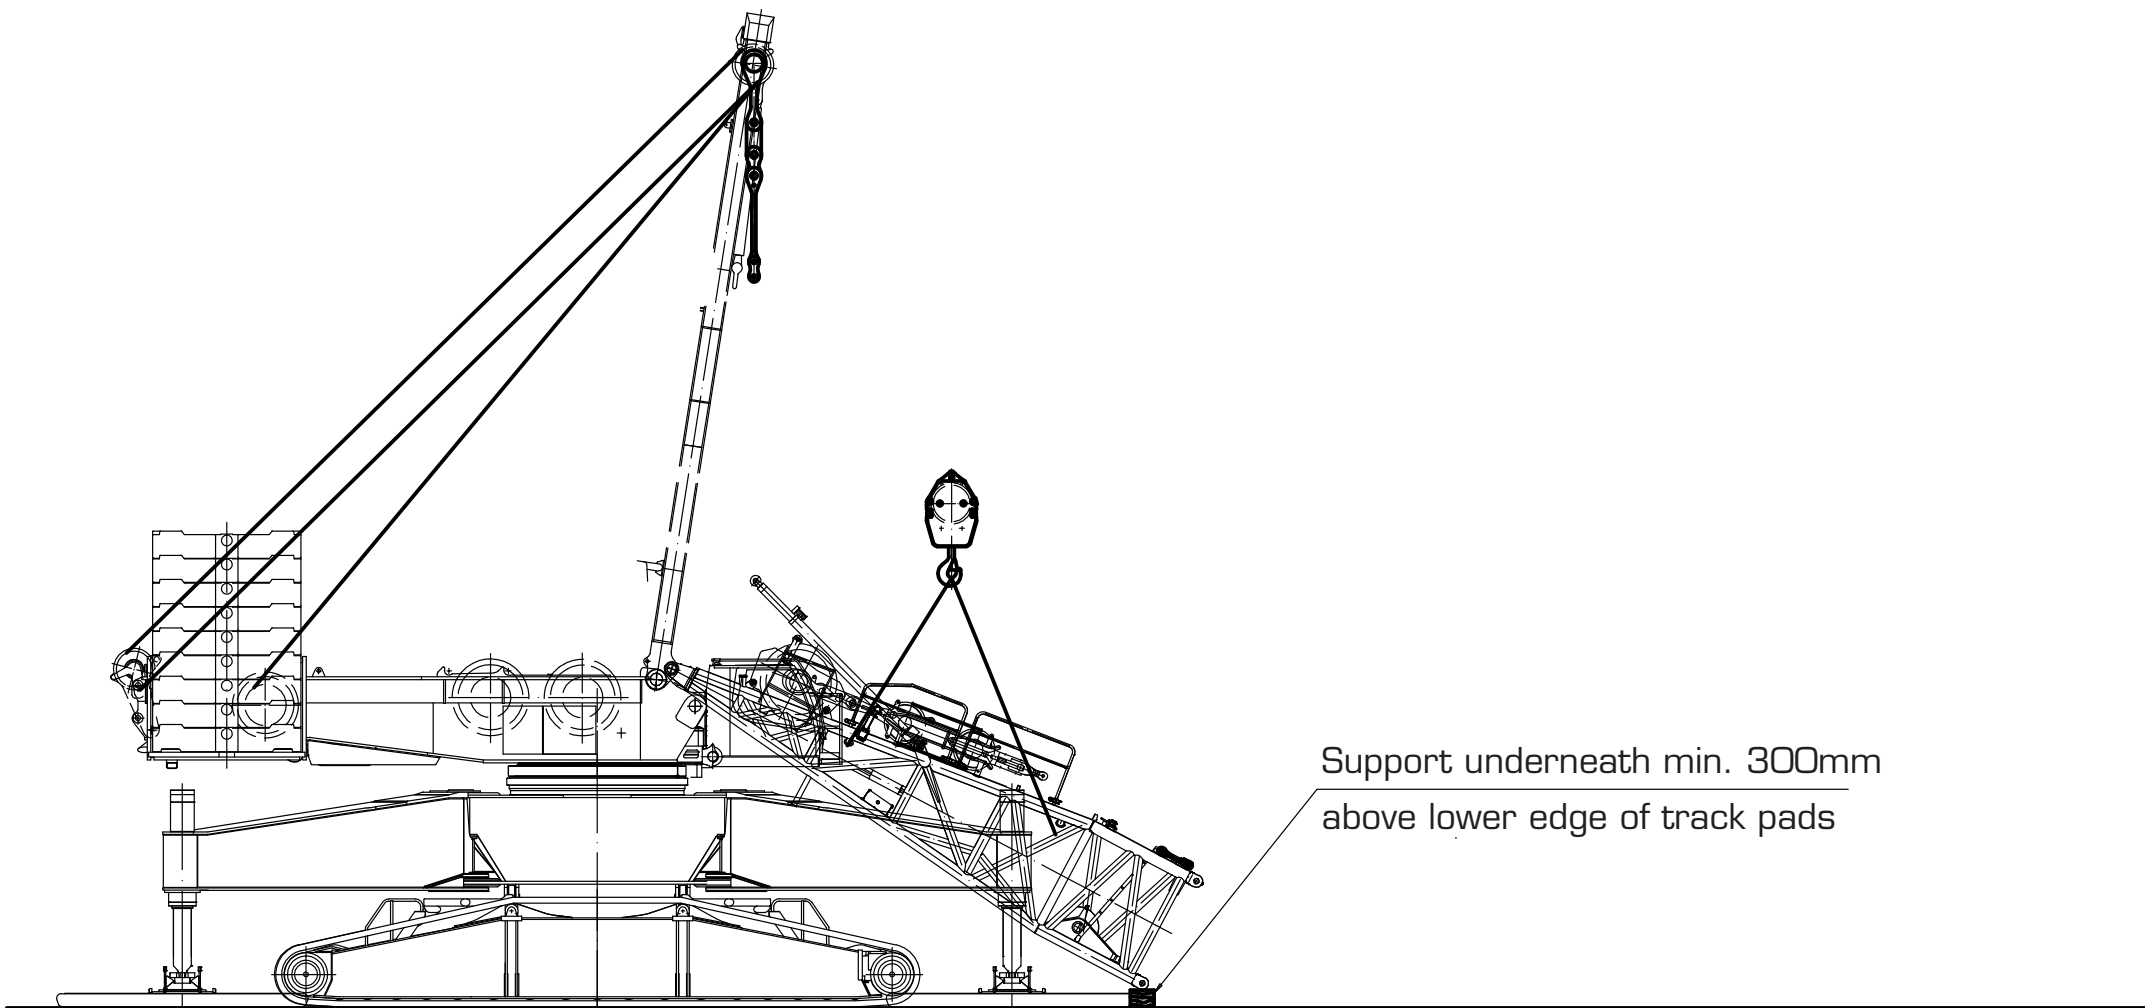


Install D-pivot section

3

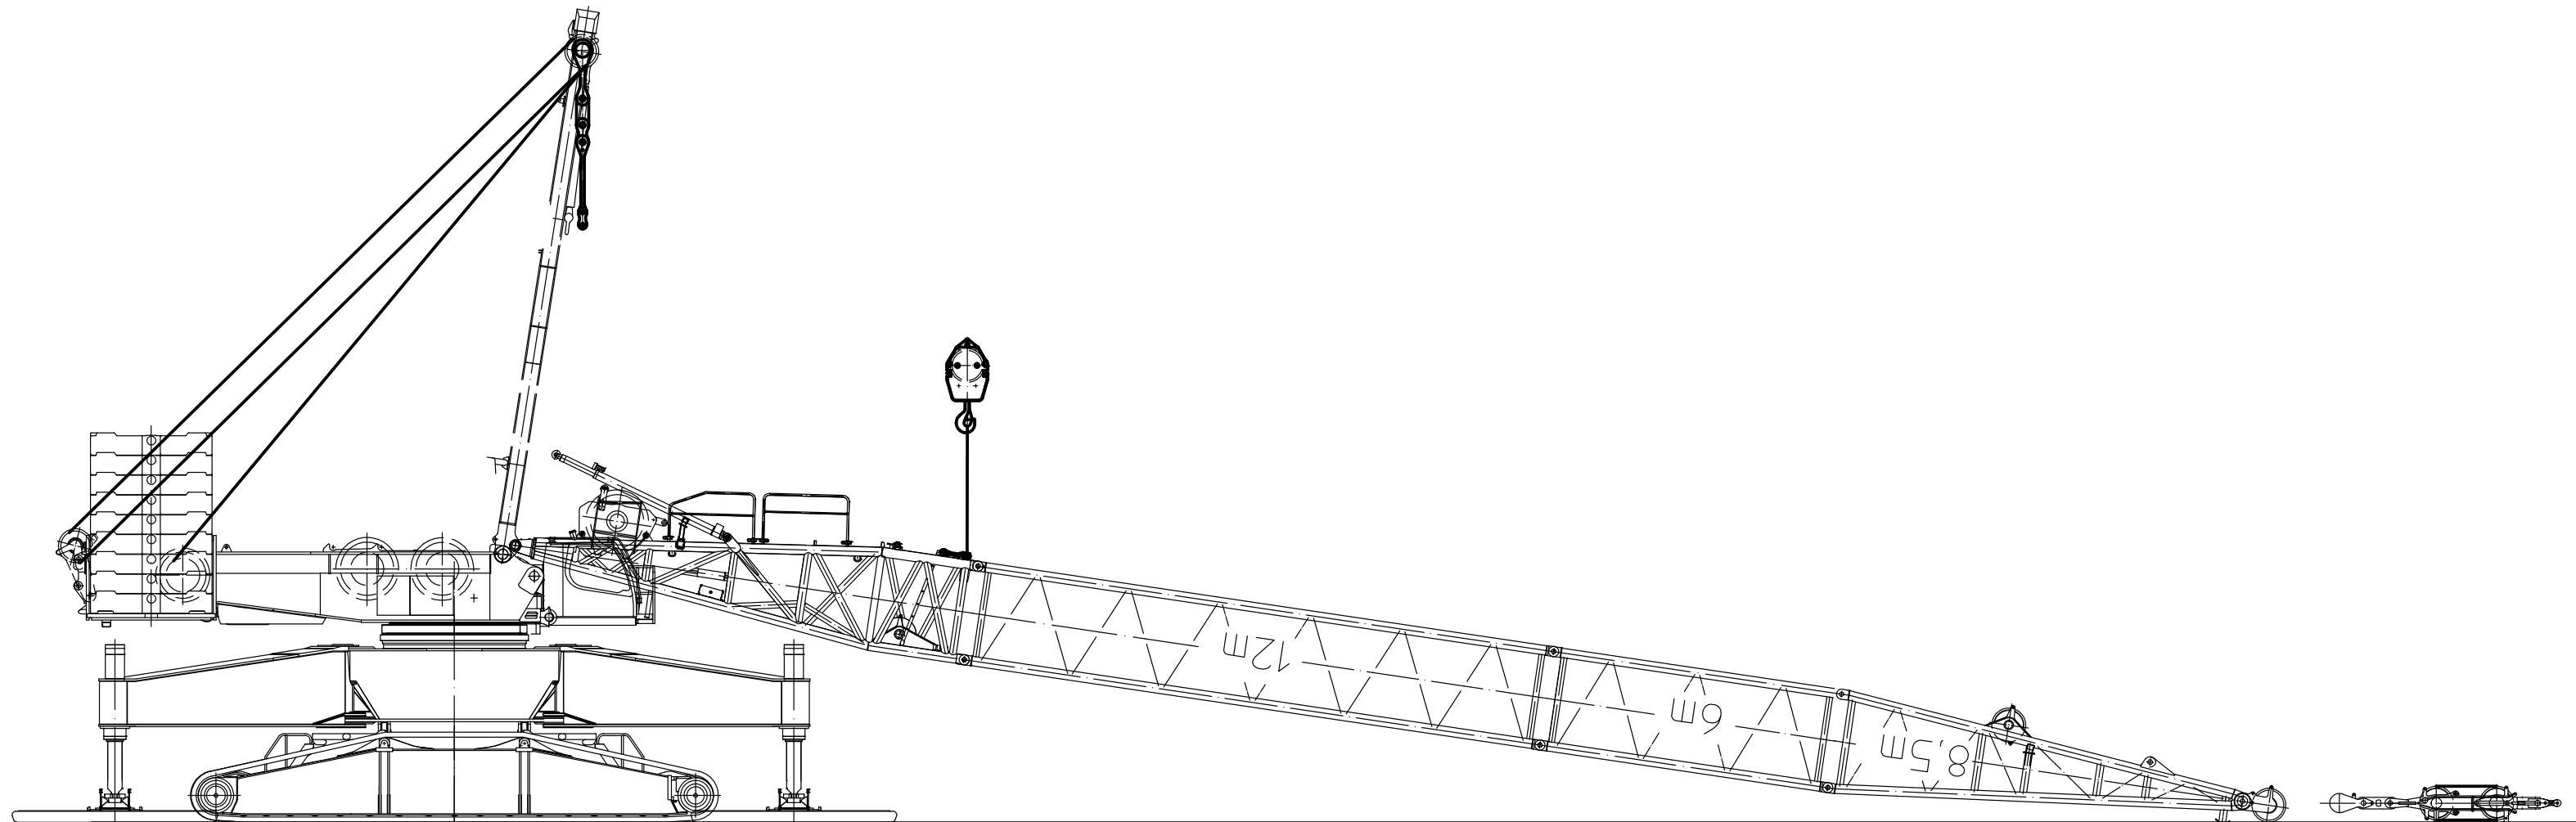


Close the derrick with the auxiliary crane.

5

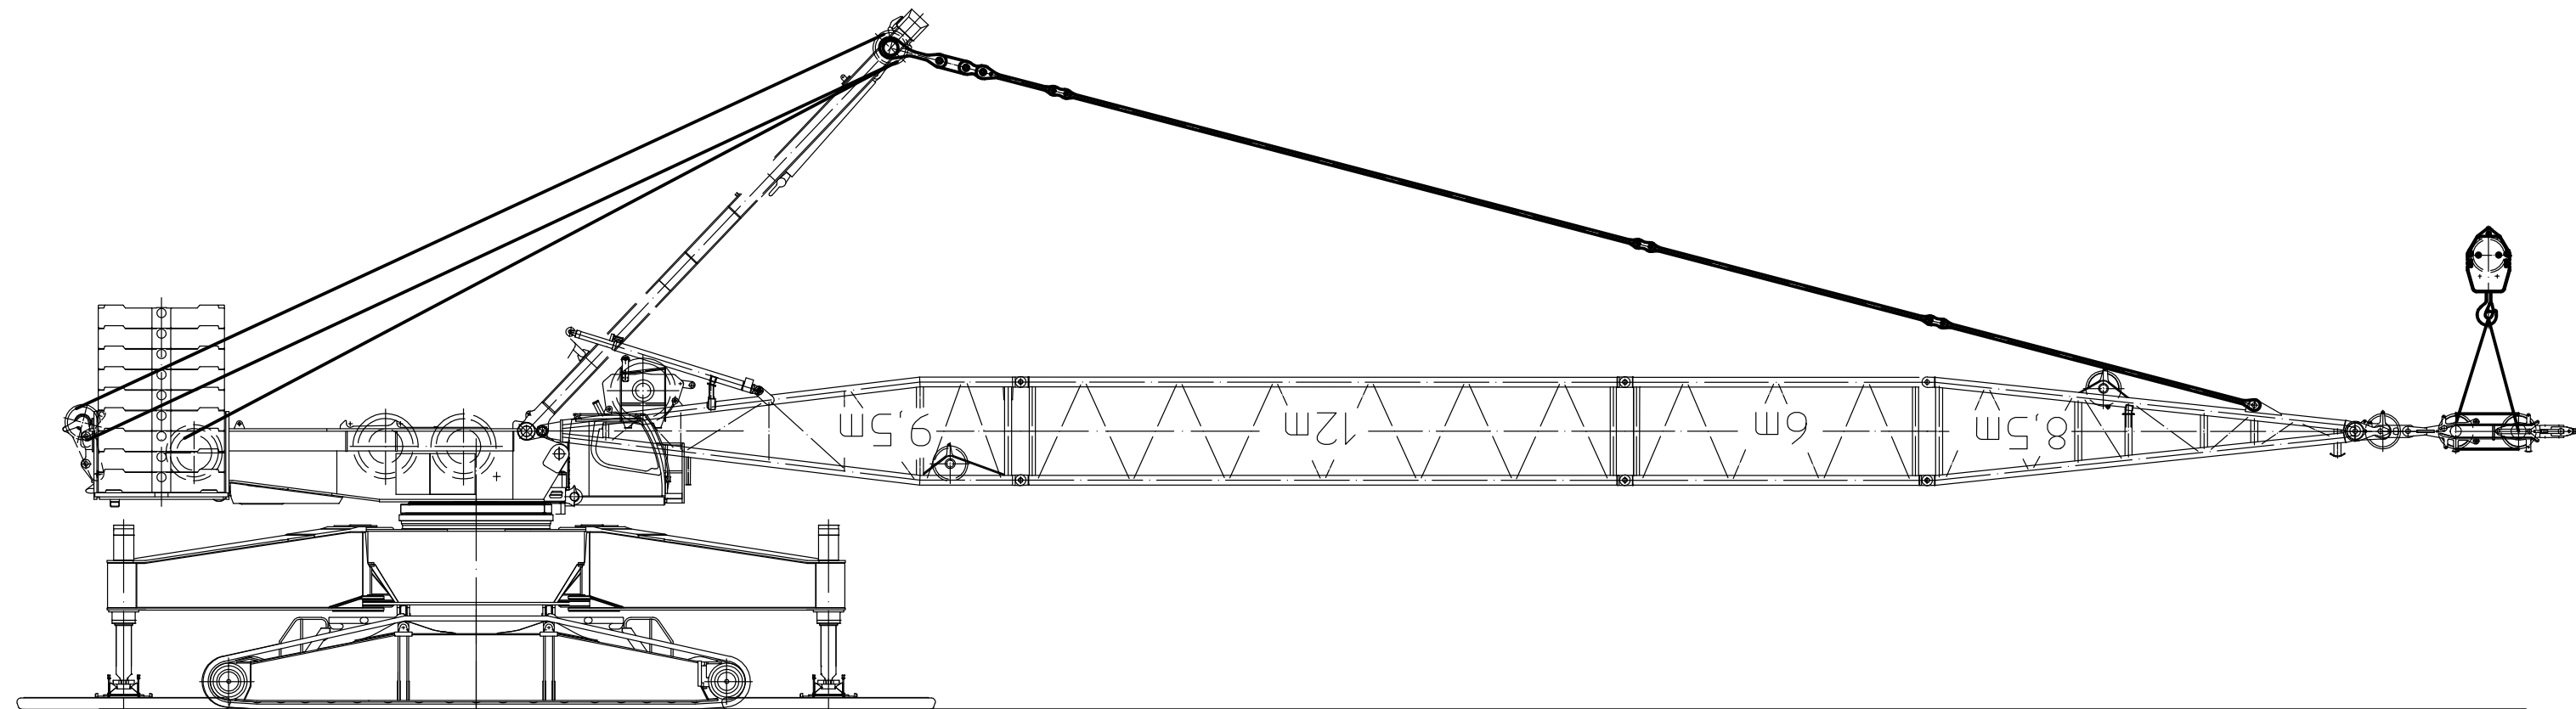


Pull derrick up
install pulley block

6

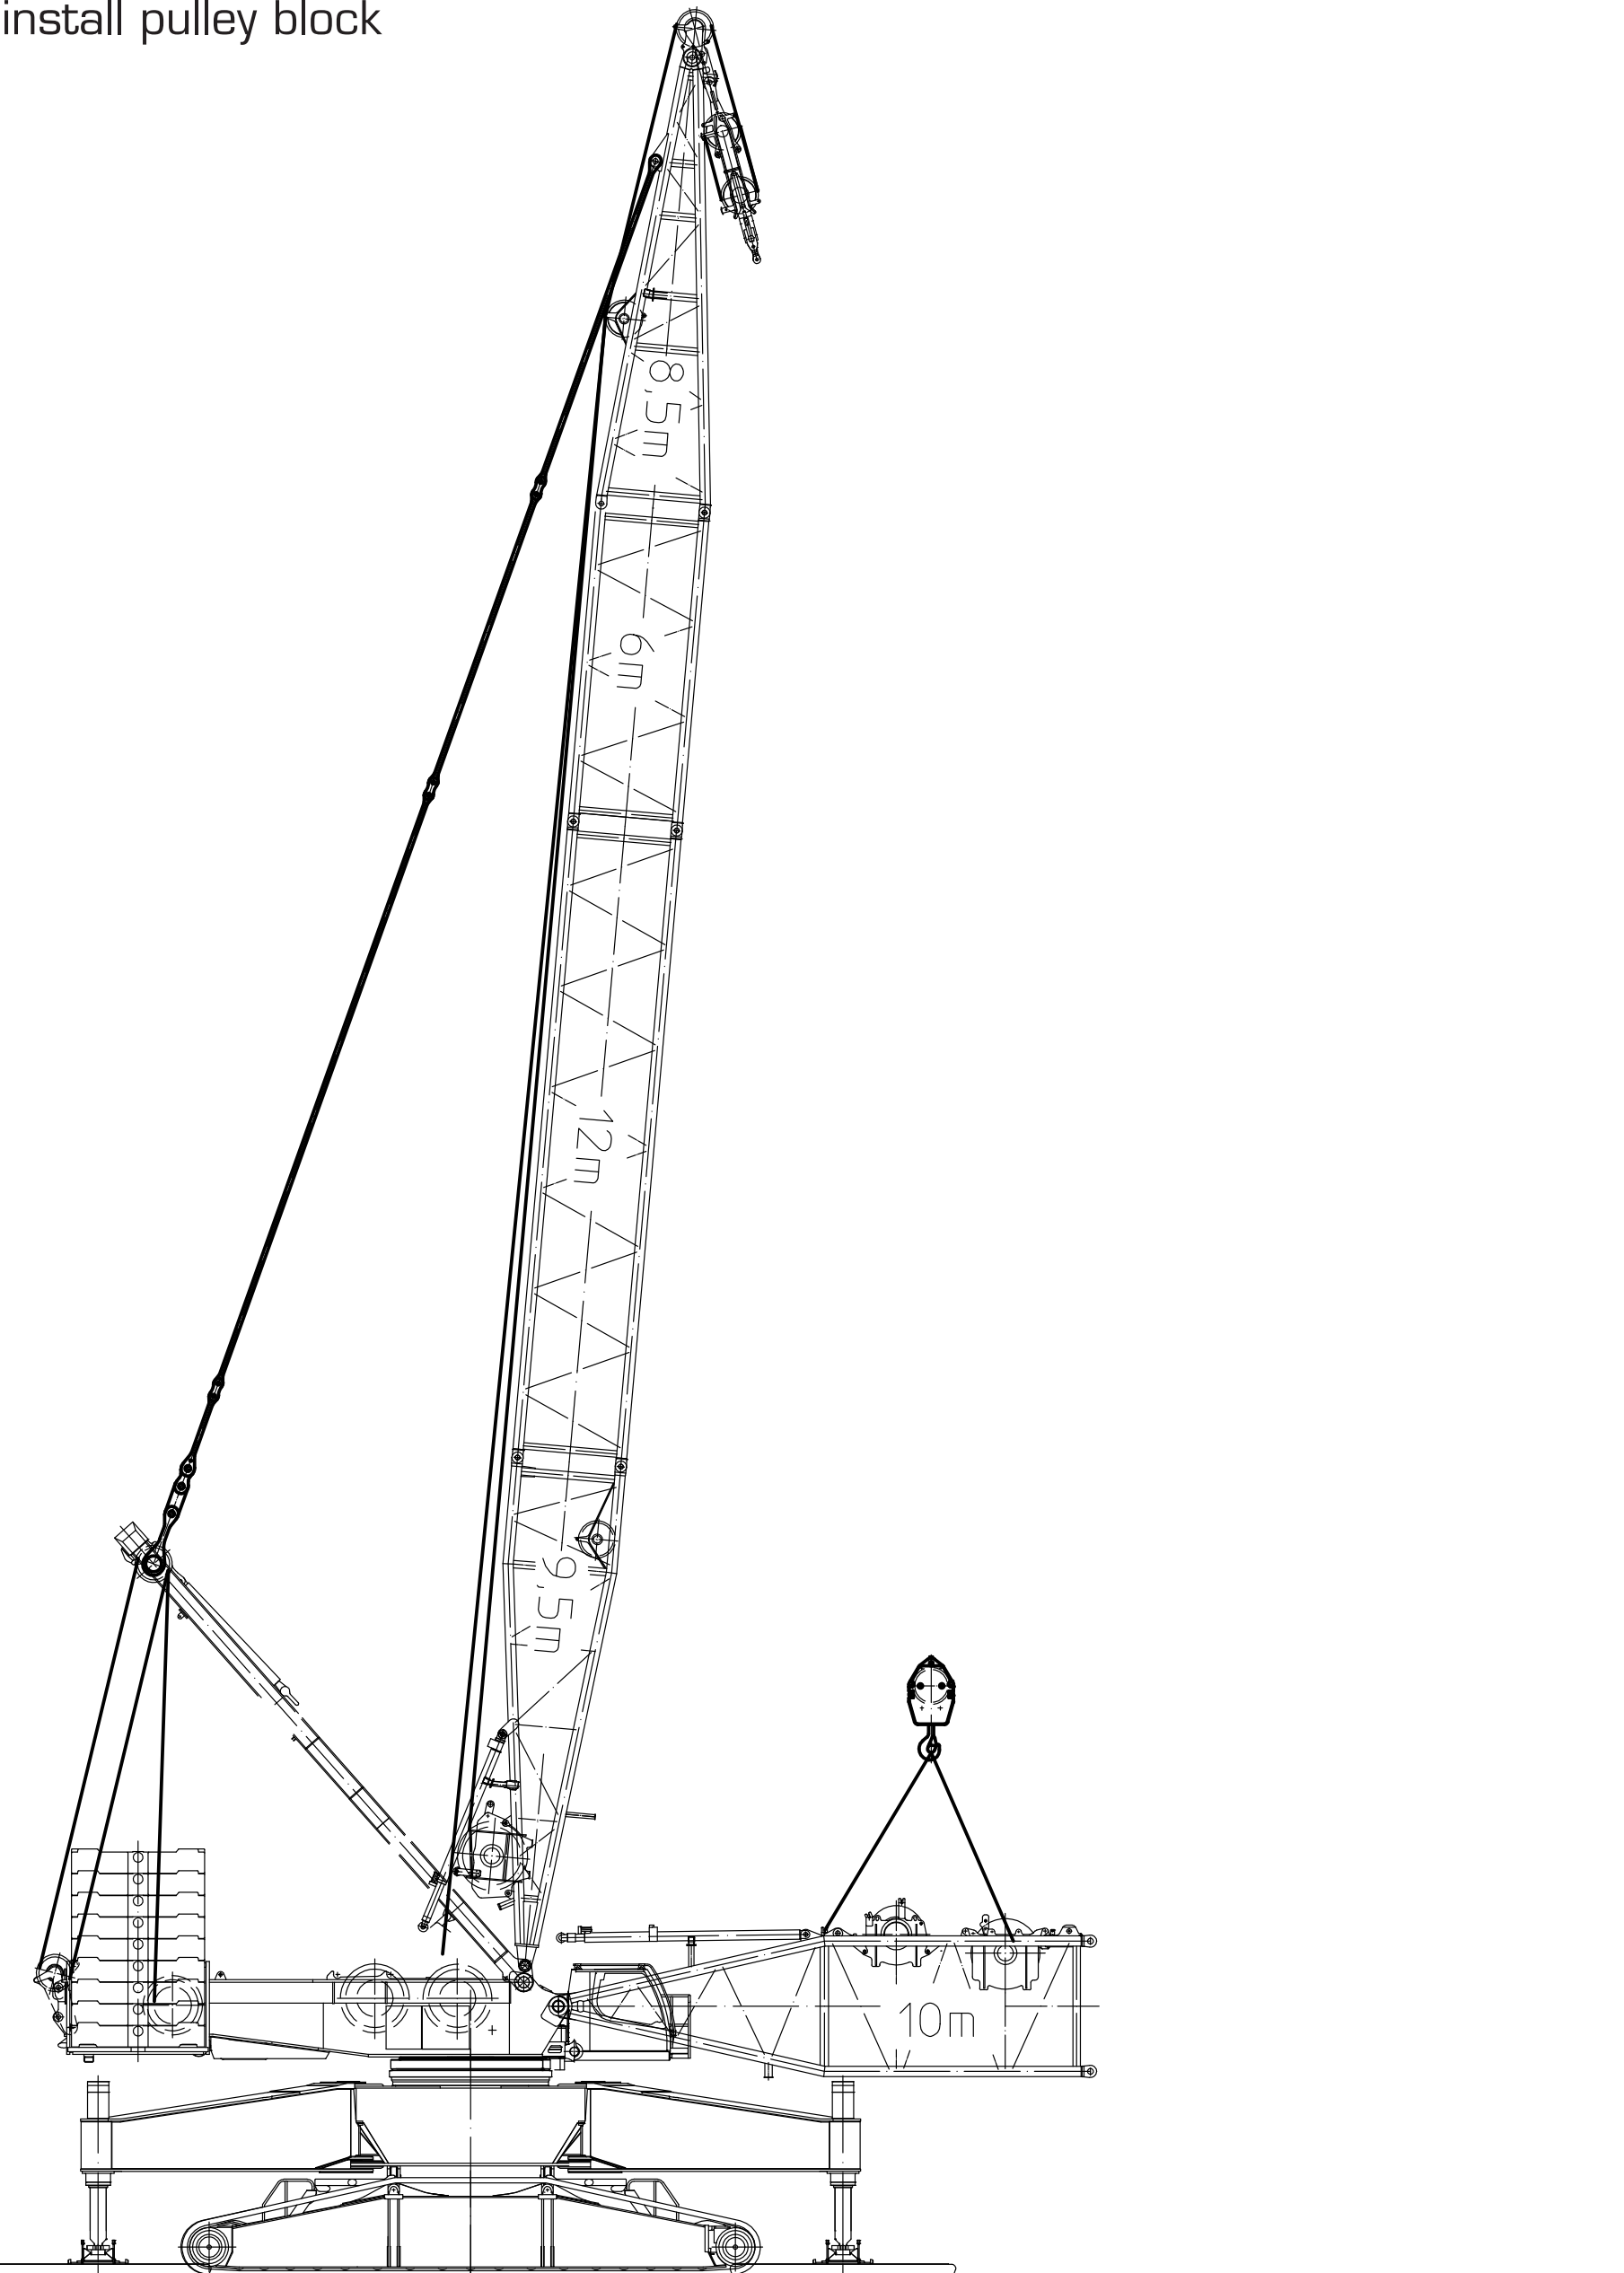


Install S-pivot section

2

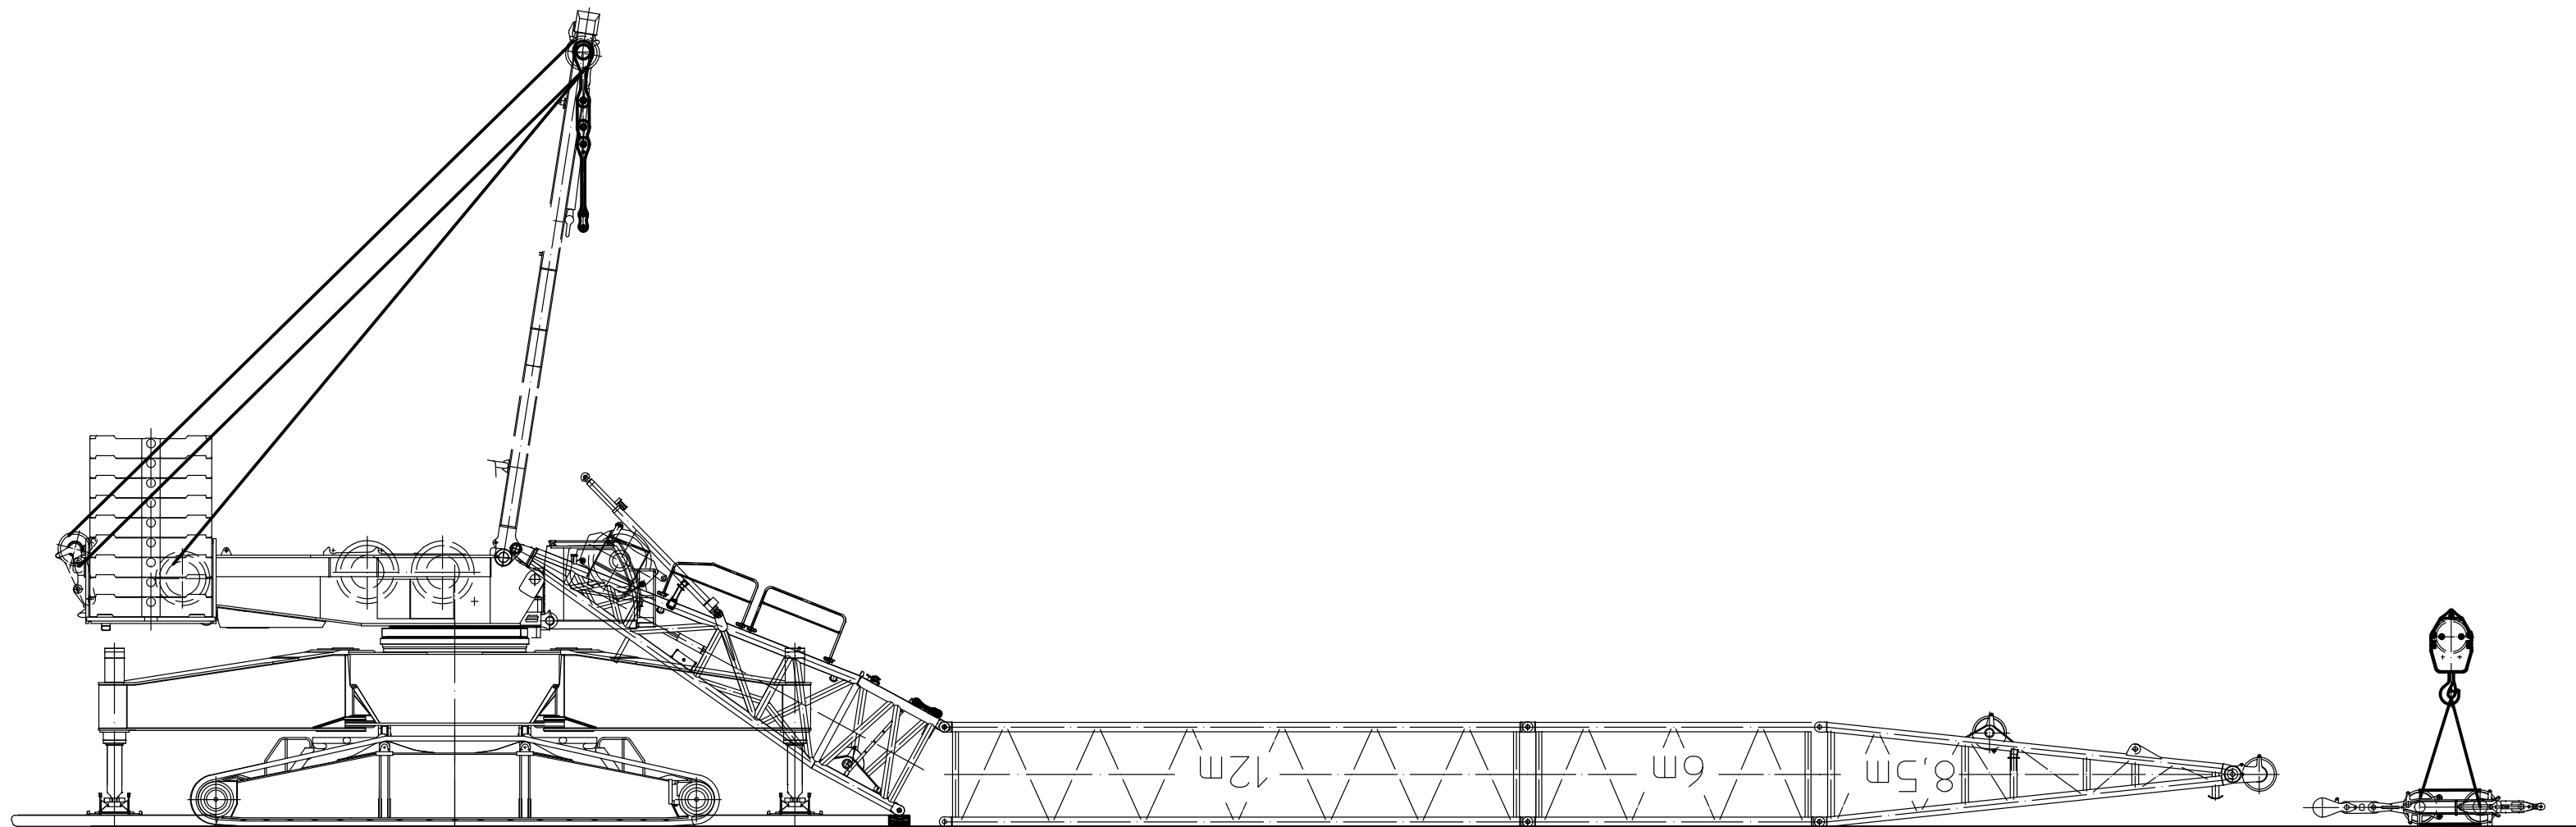


Install D-intermediate sections and D-end section
Place the pulley block with the auxiliary crane in front of D-end section.

4

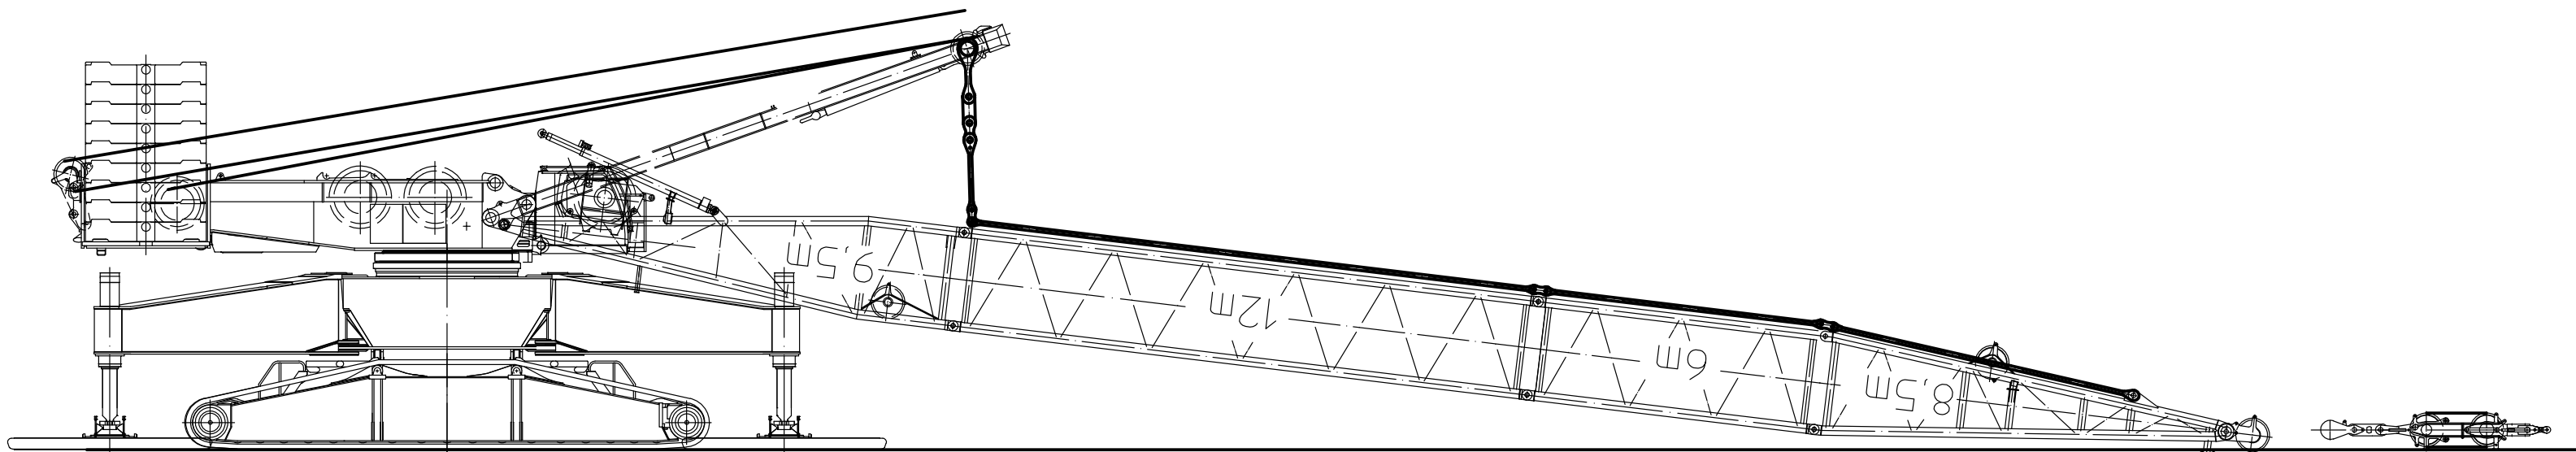

Pin SA-frame rods with derrick rods.

7

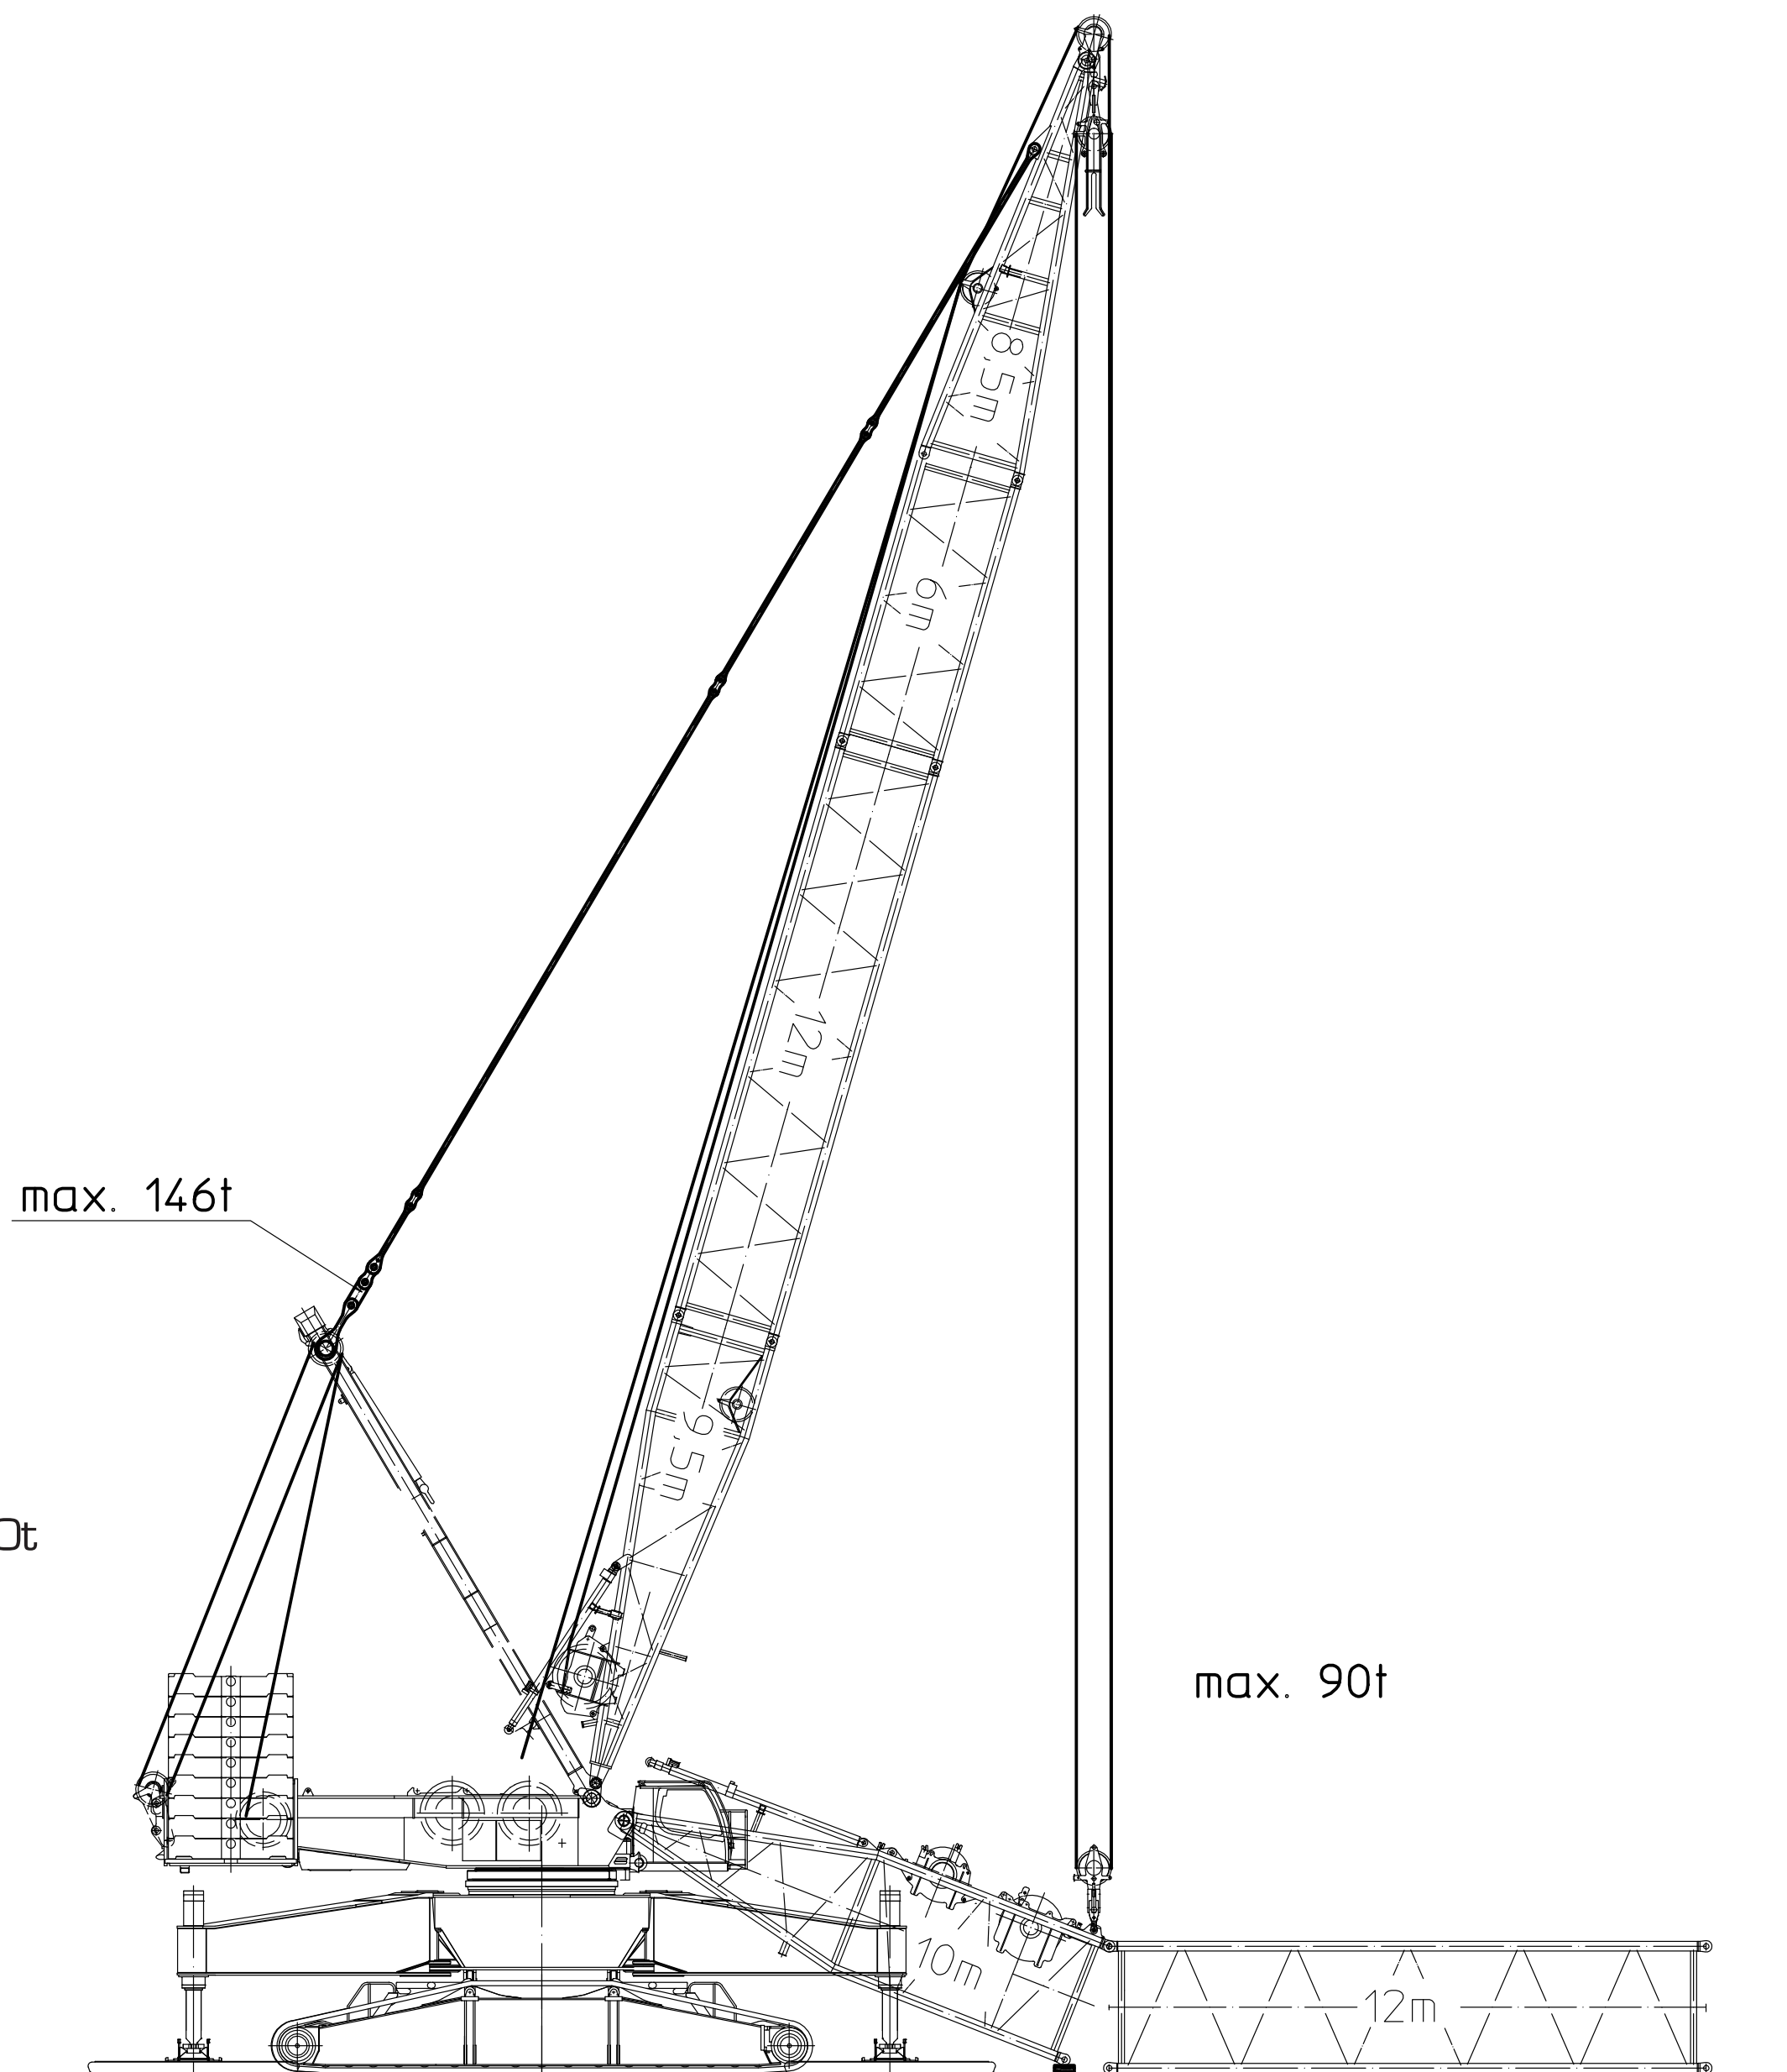

Attaching the S-booms
Close S-boom with pulley block

Support underneath min. 300mm
above lower edge of track pads

Turntable ballast min. 150t

Statically checked:	Administrator	Date	Name
	Department manager		
	Comment: Change 001 Statically irrelevant		


Page 01 of 02

LWE_CAD


04.11.2009 | SAR

D-ASSEMBLY
NARROW TRACK


1666-720.00.03.012-001
9880 937 08

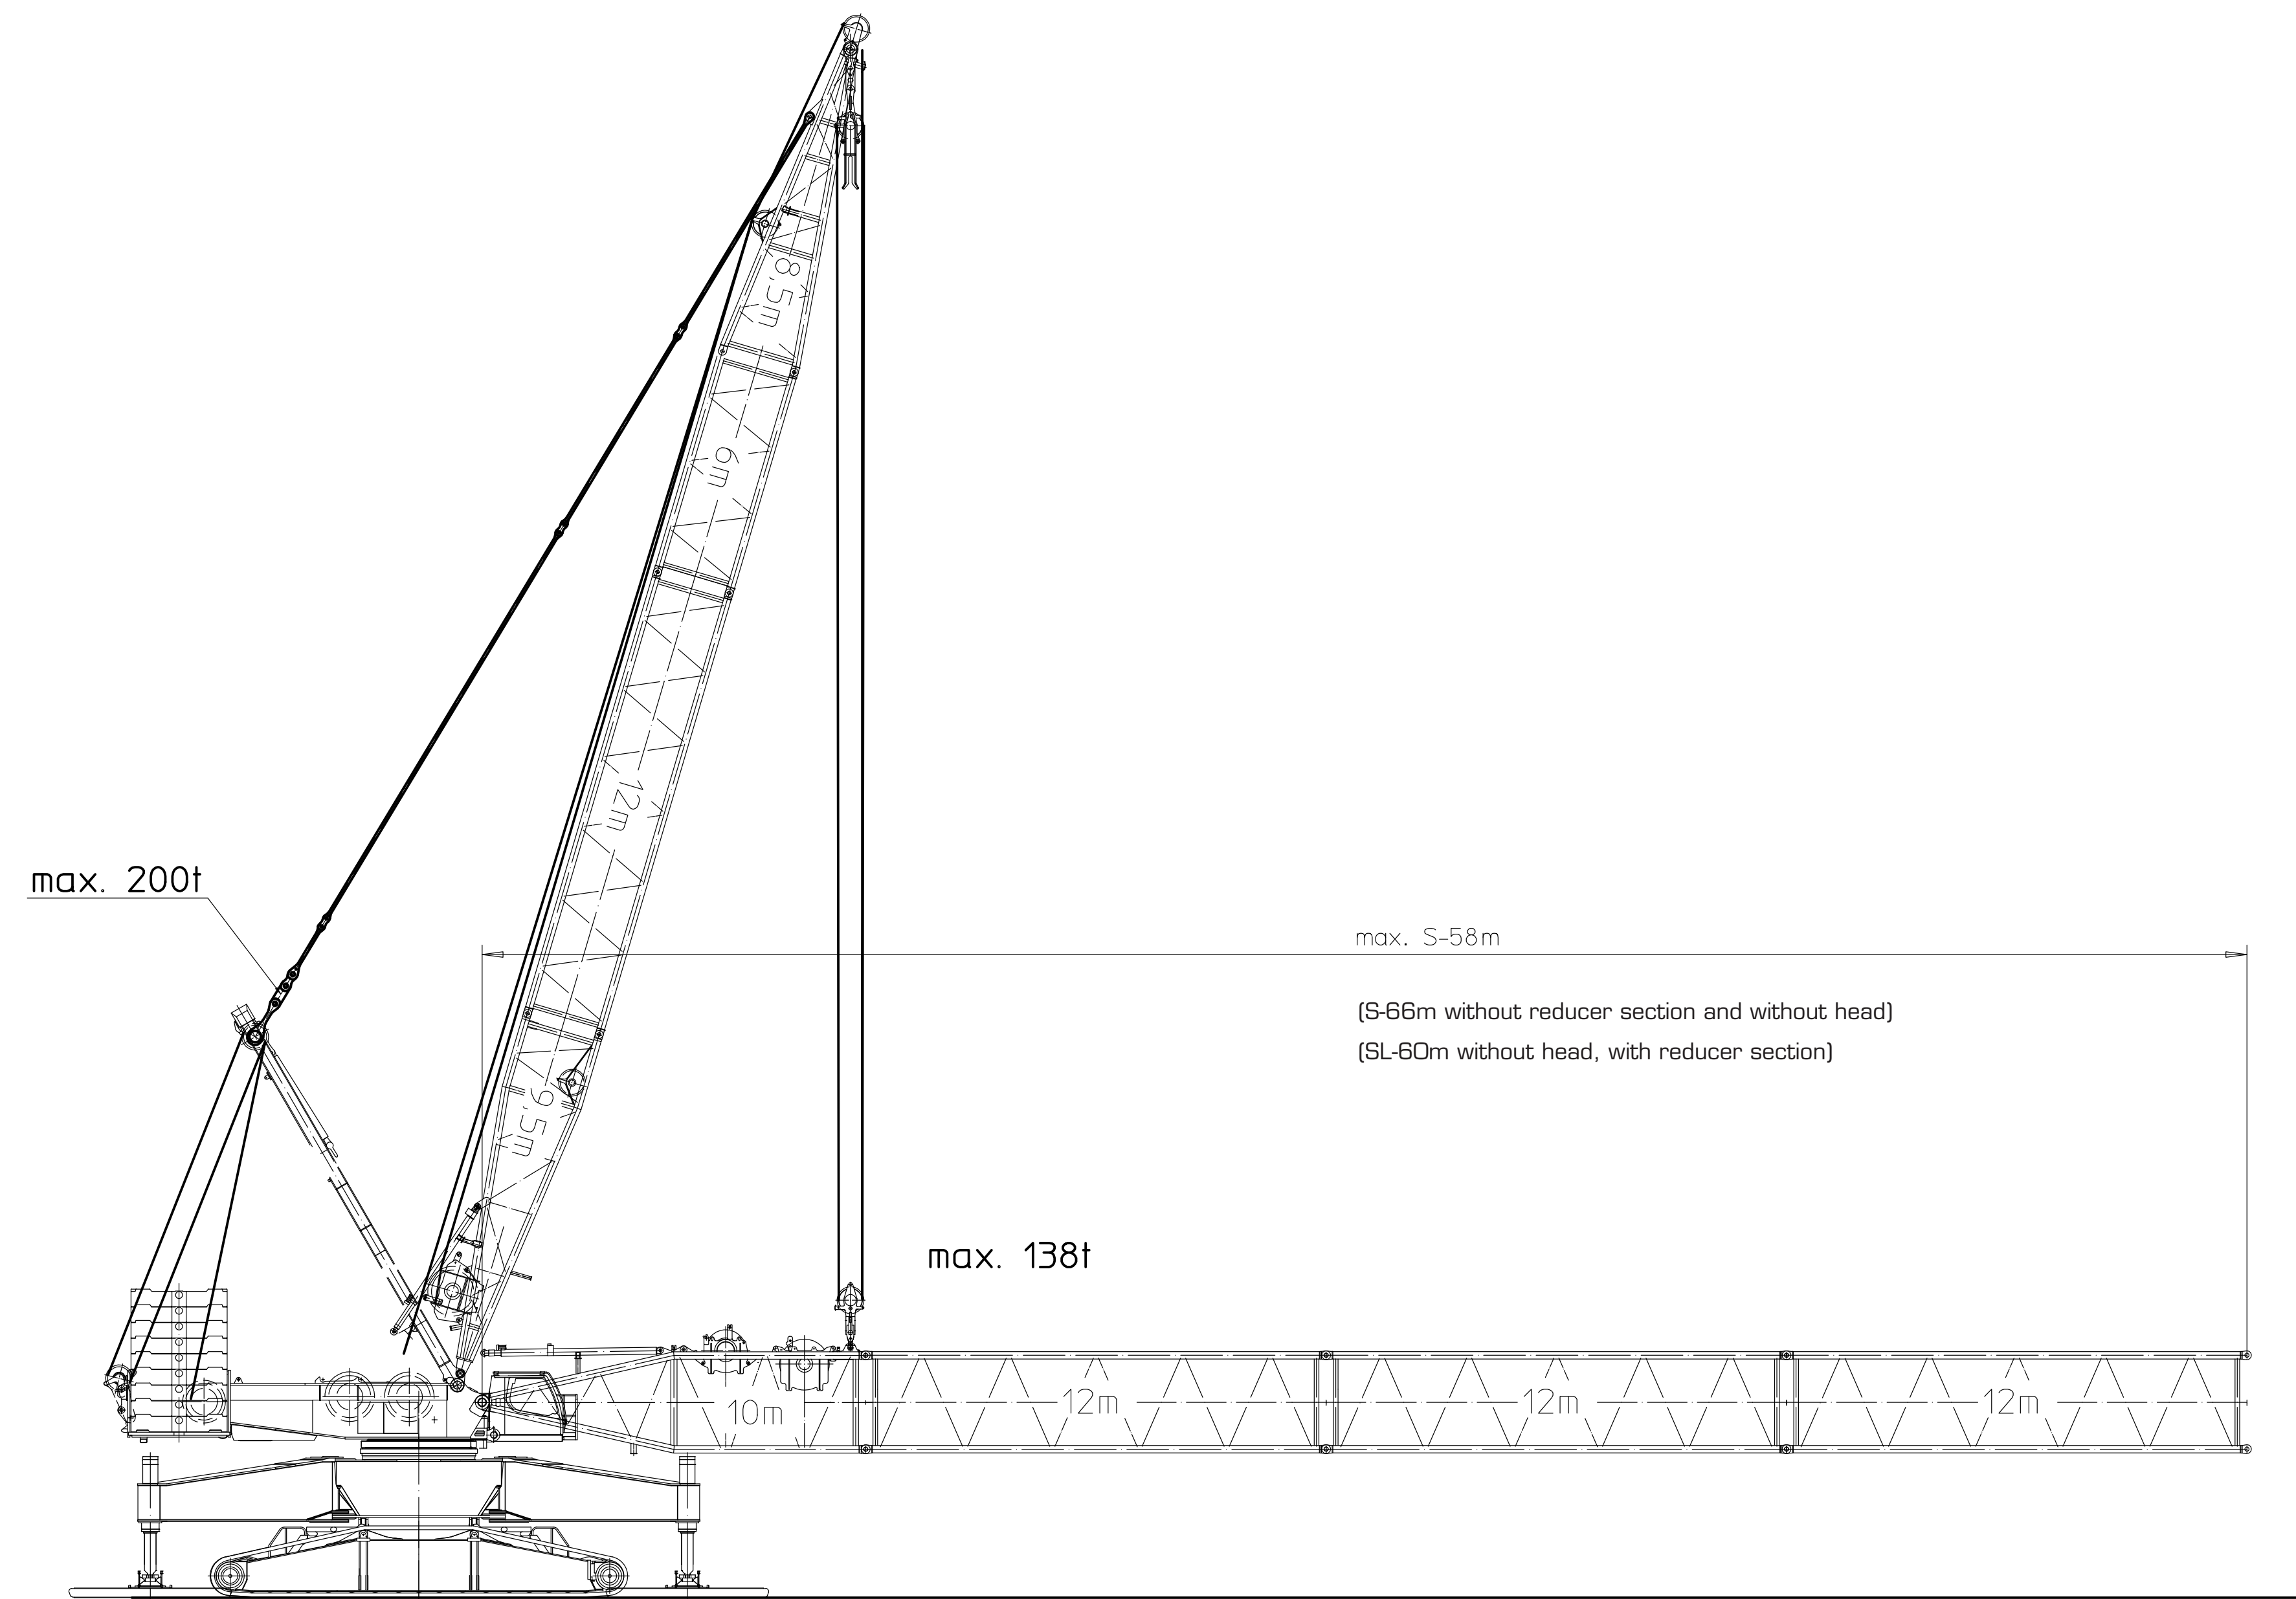

Turntable ballast min. 150t

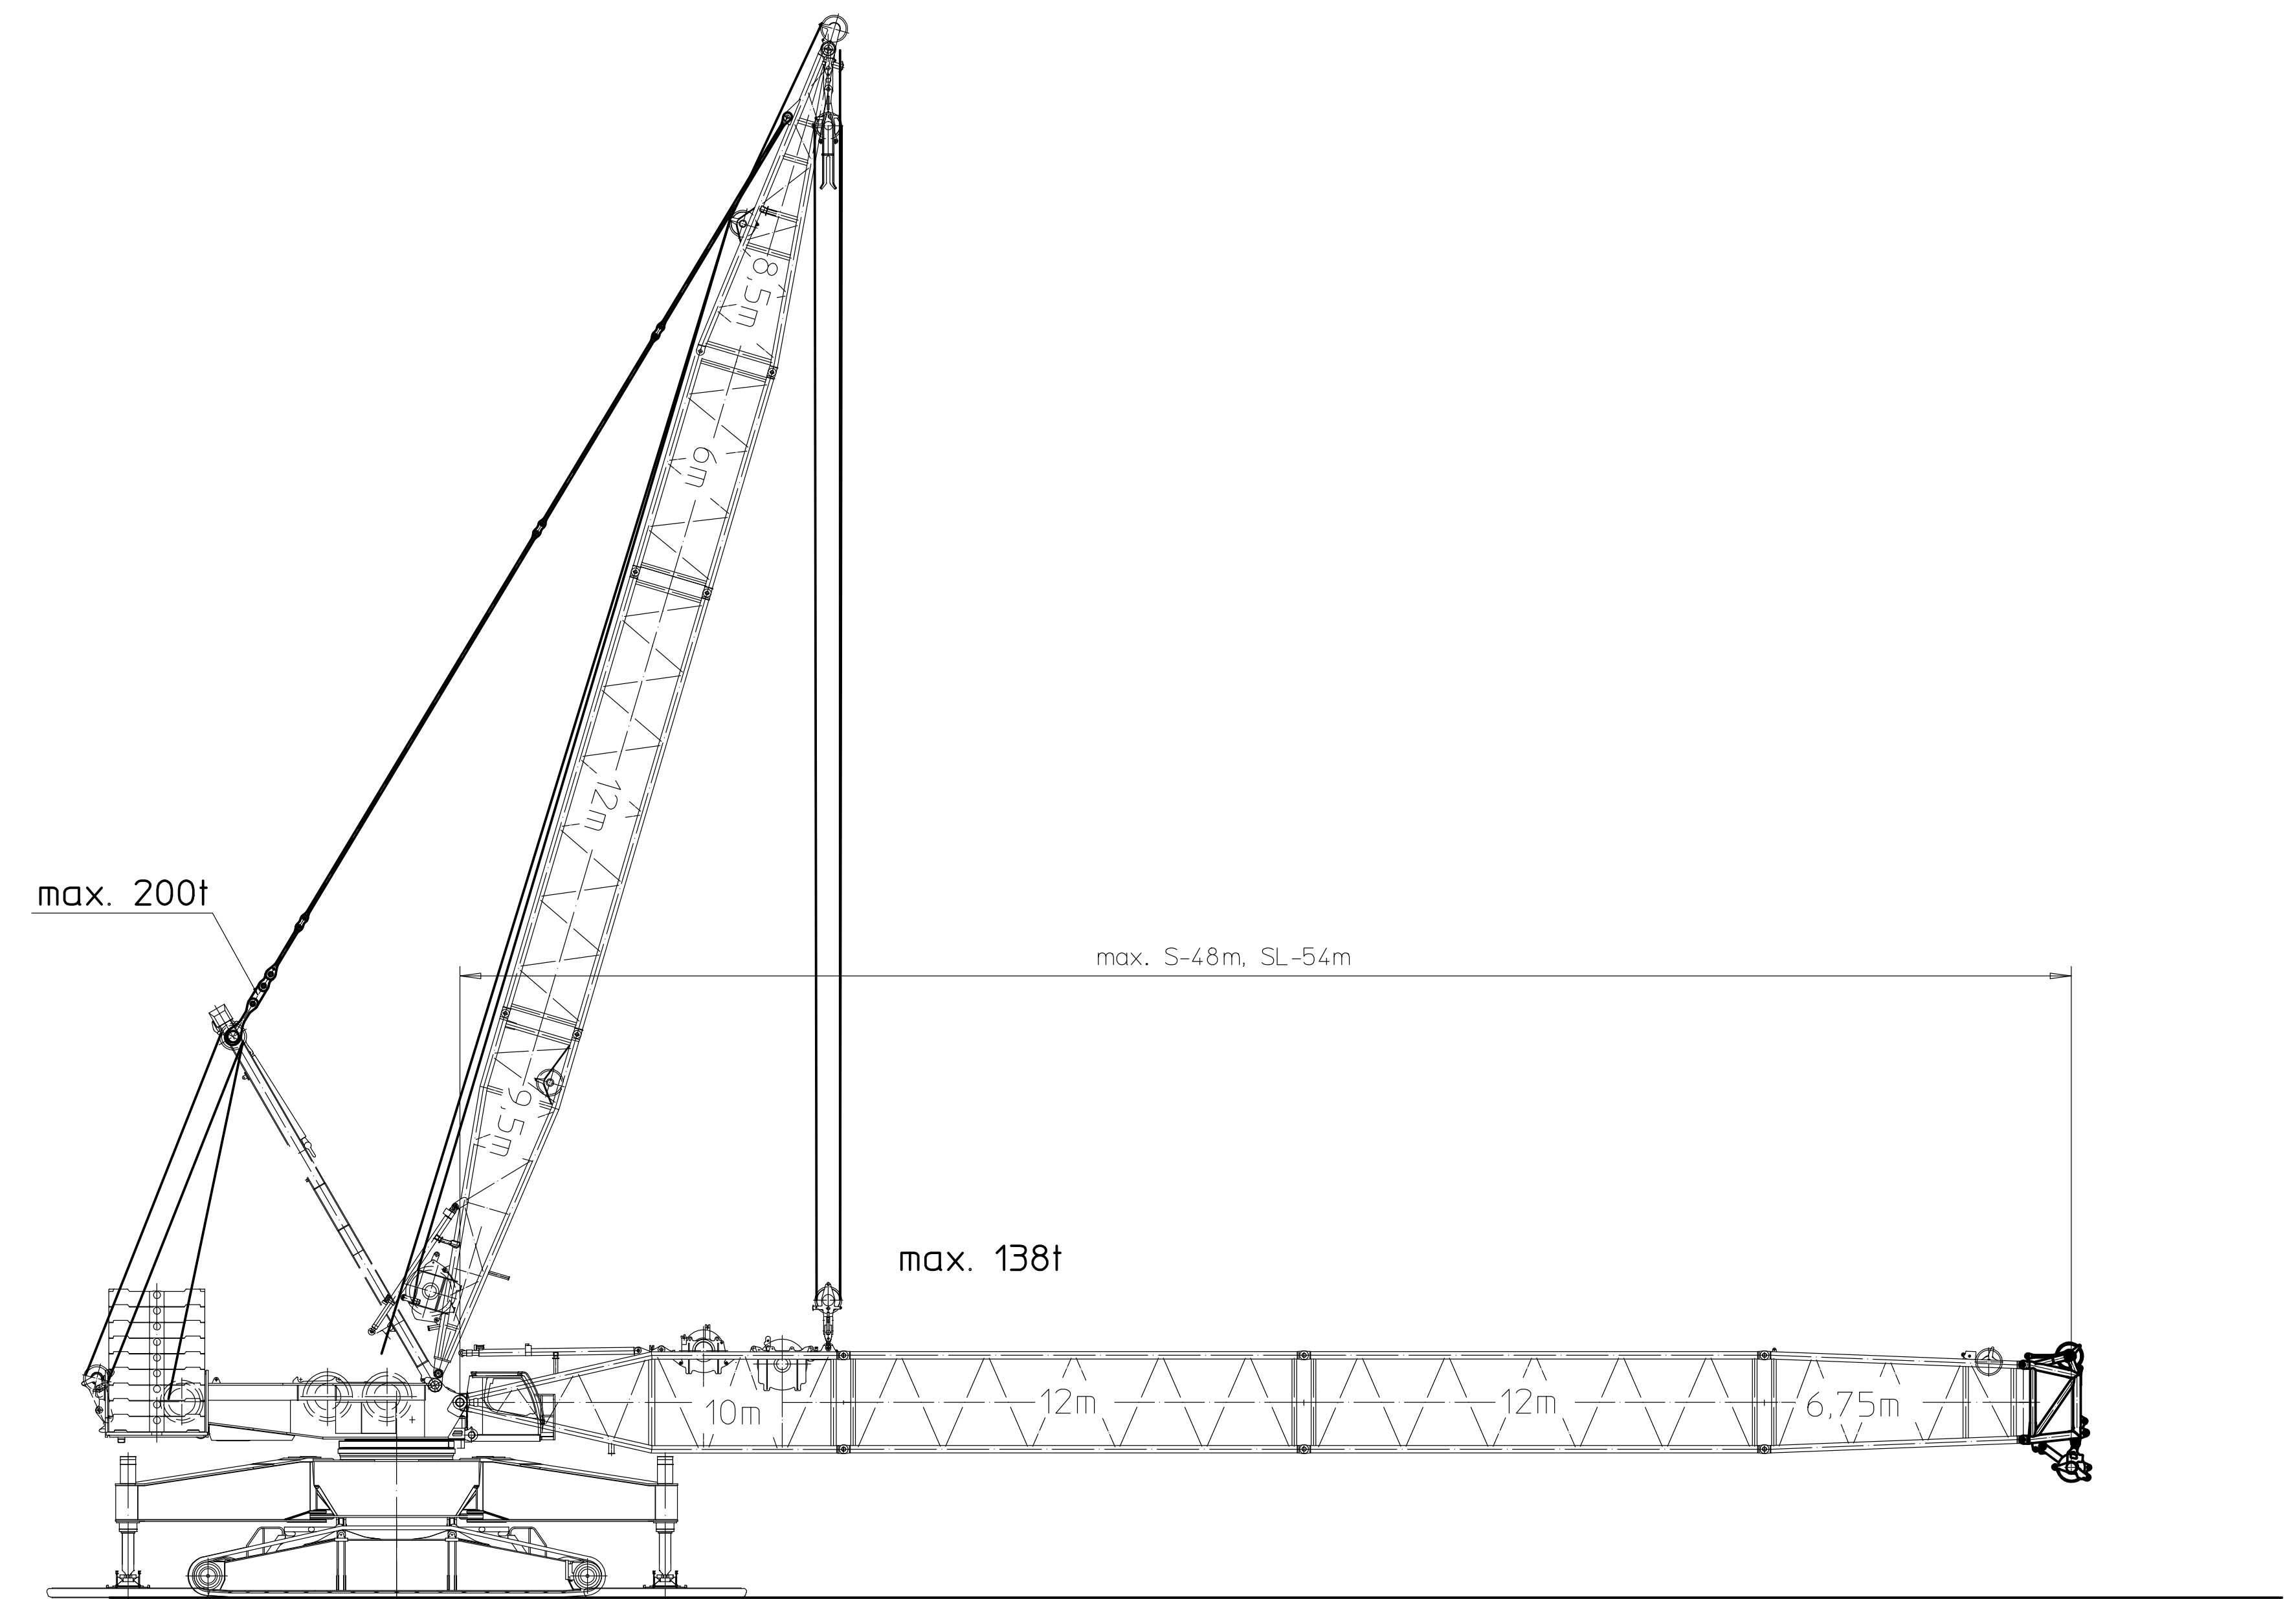

Turntable ballast min. 150t

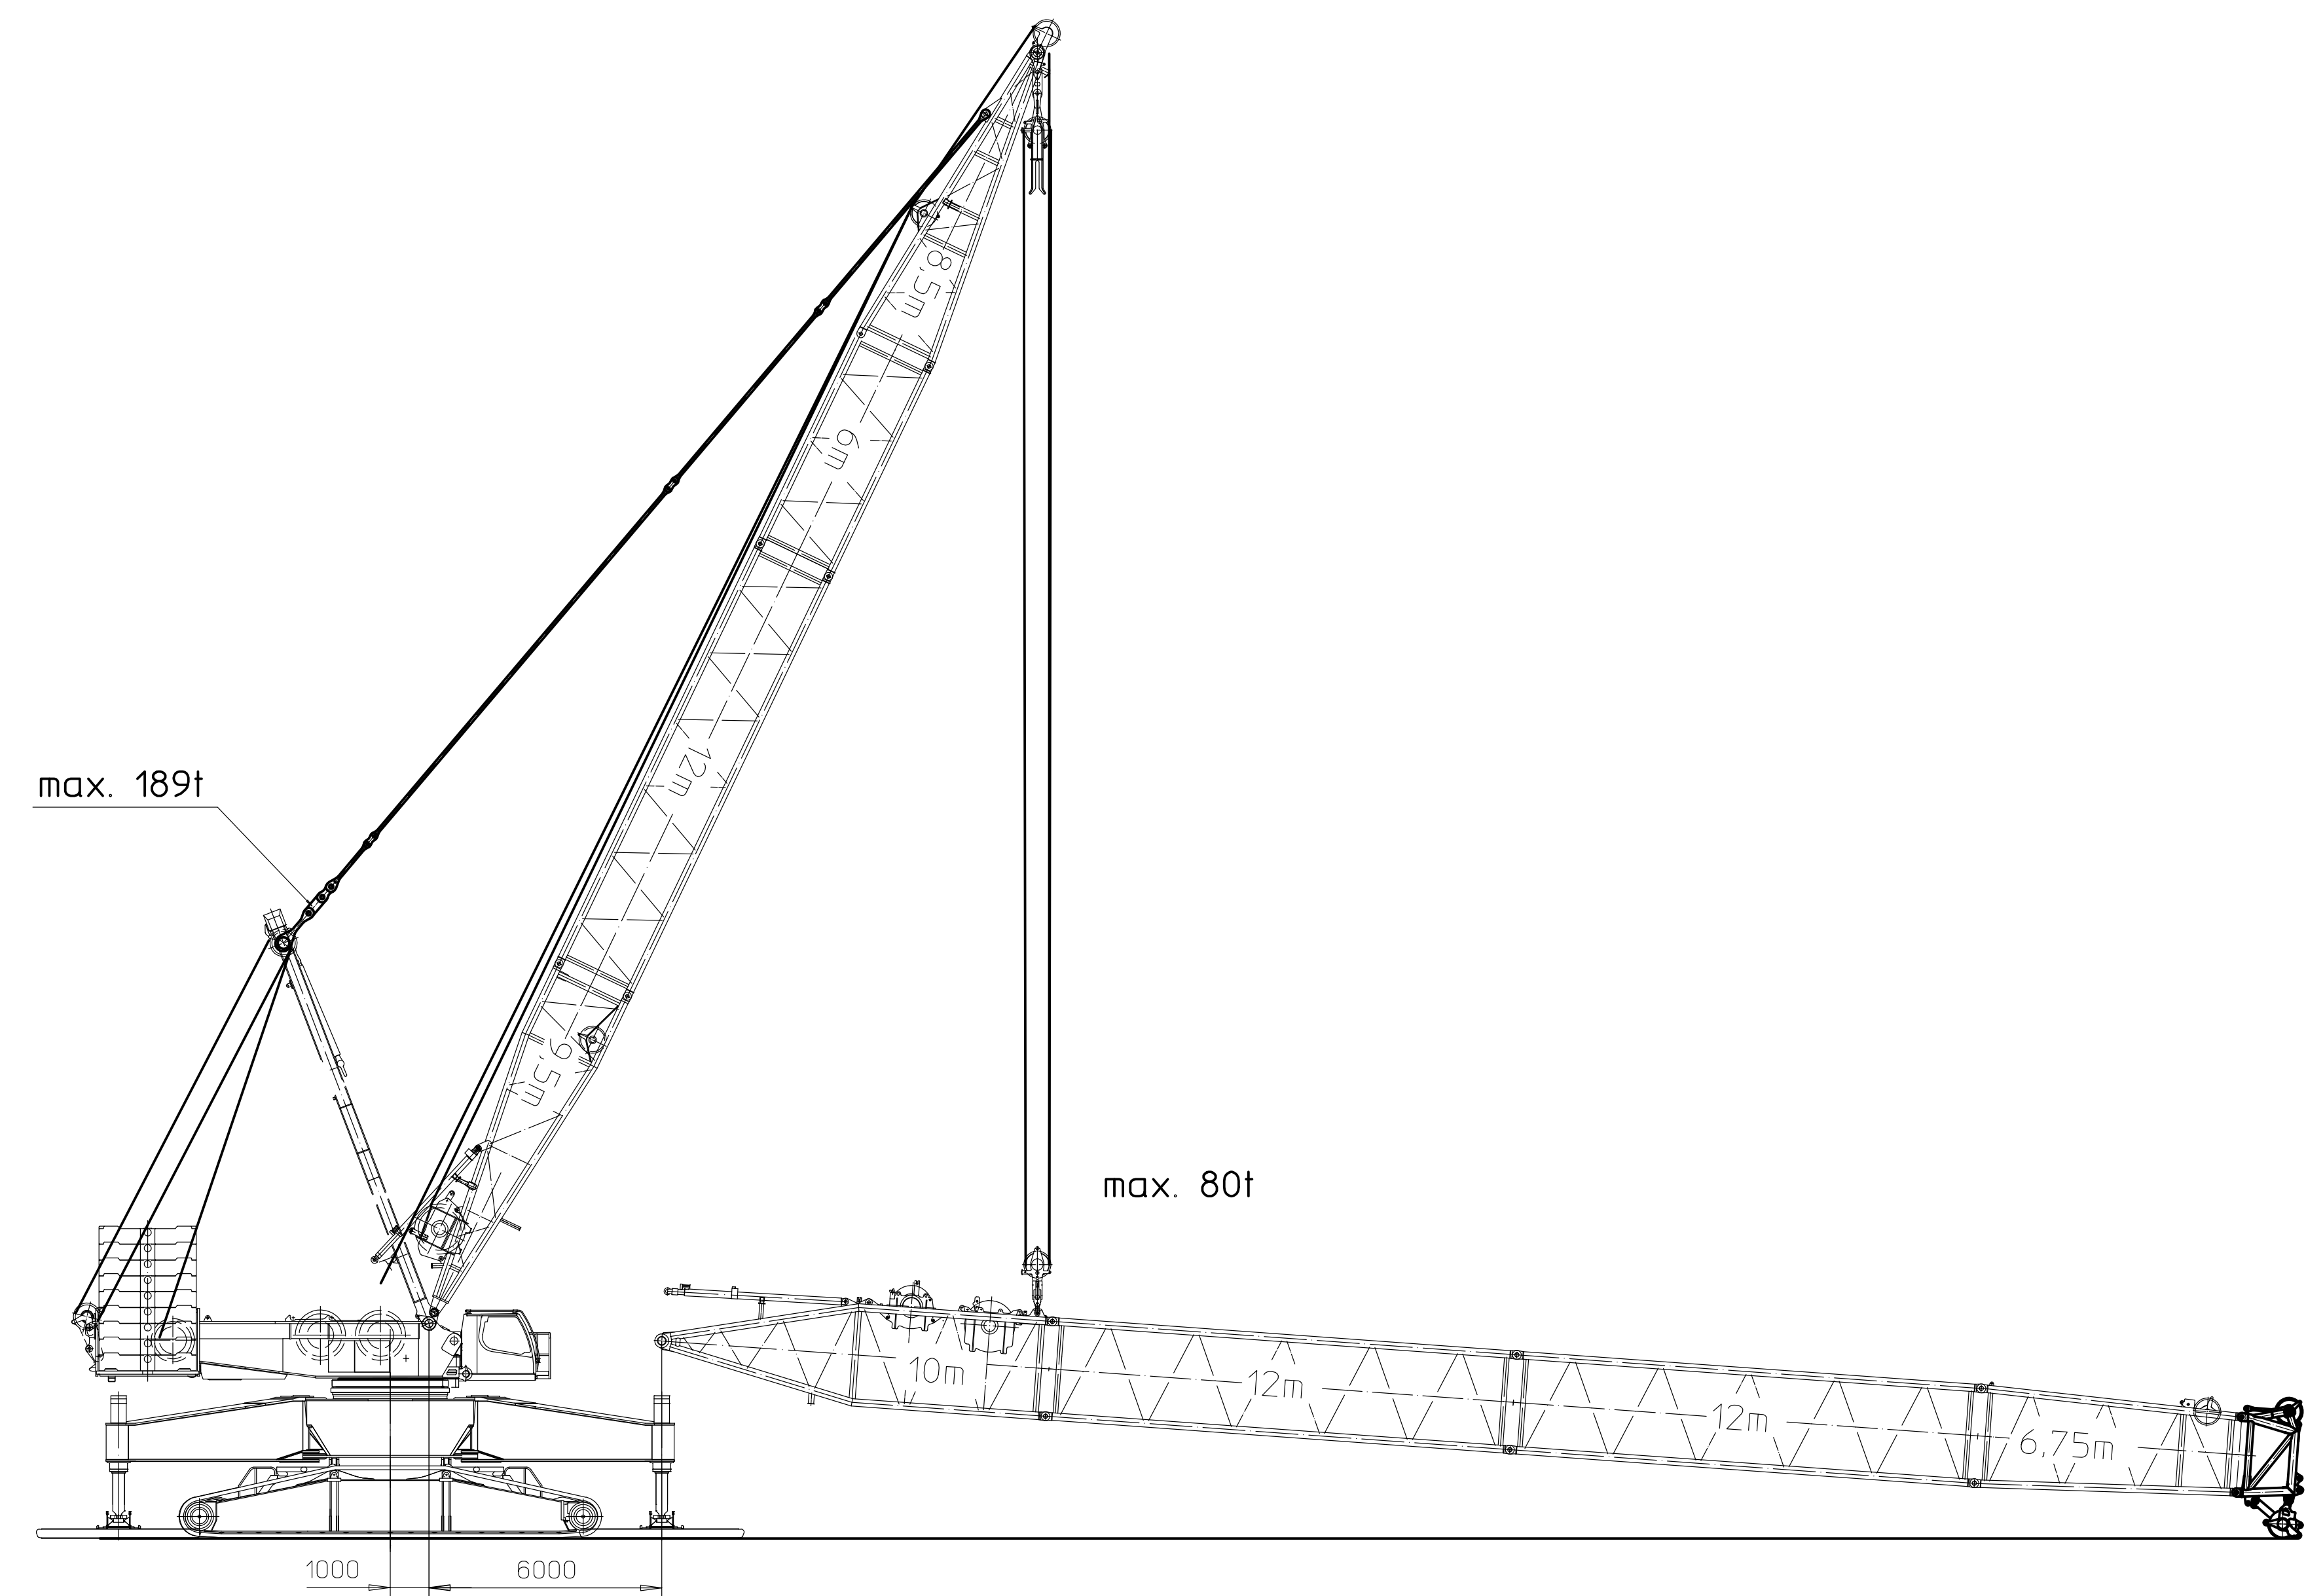

Turntable ballast min. 150t