
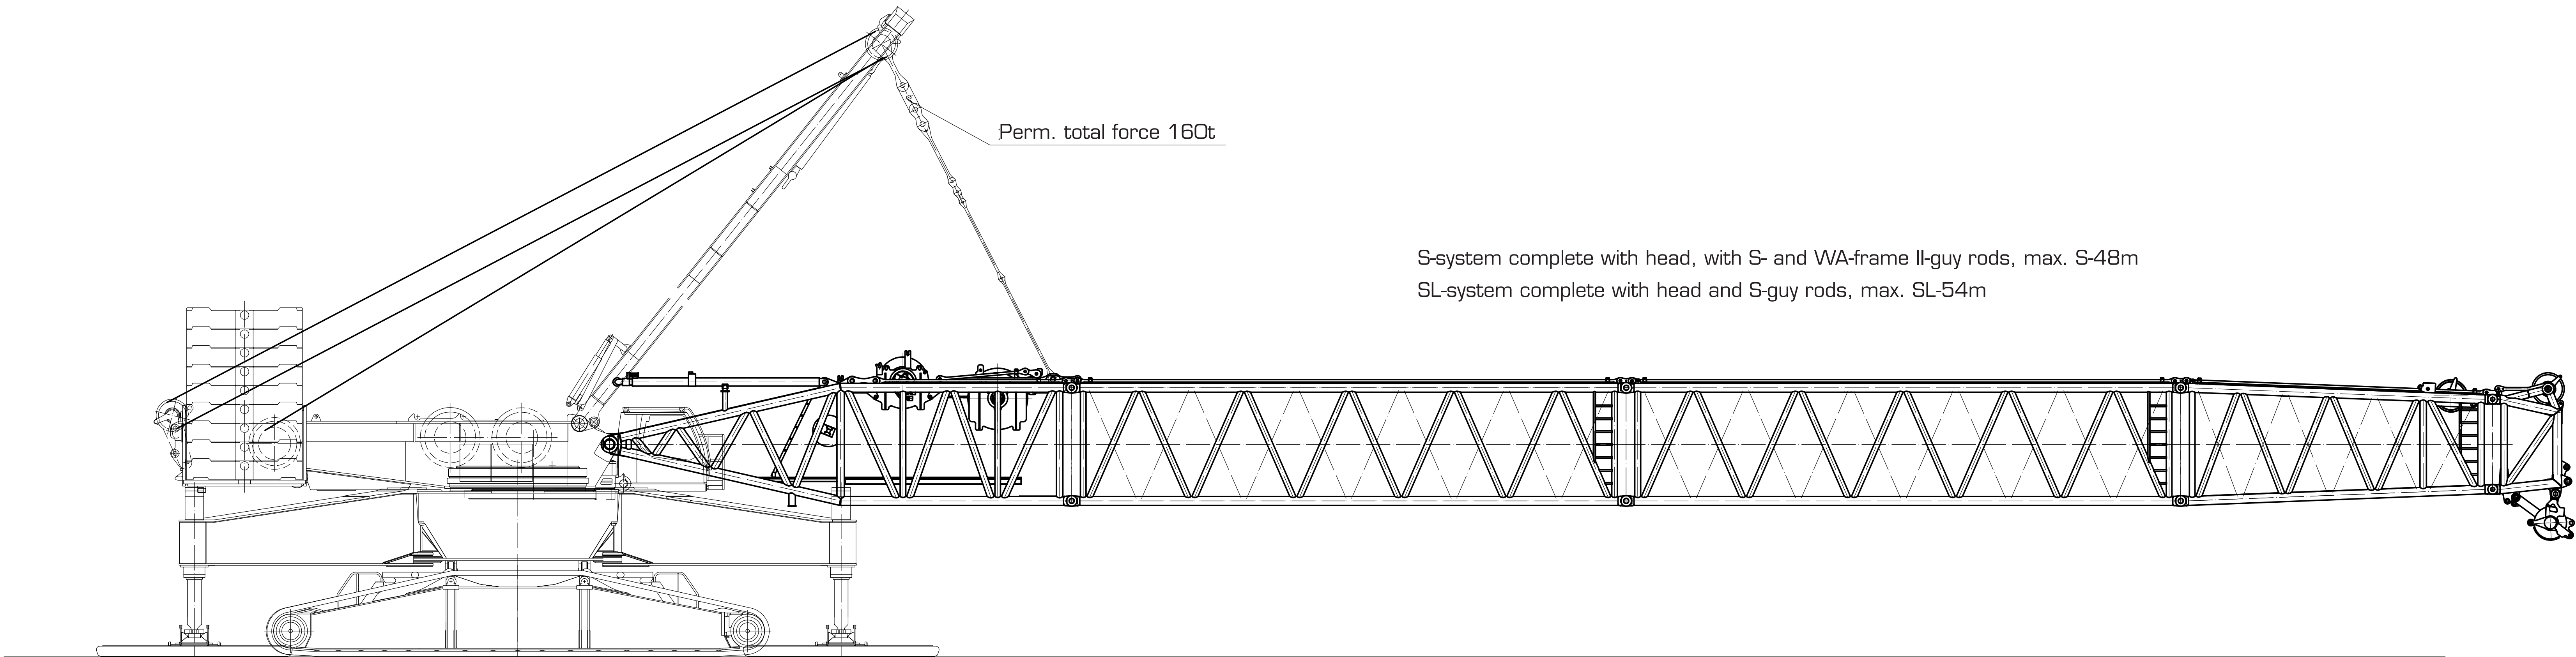
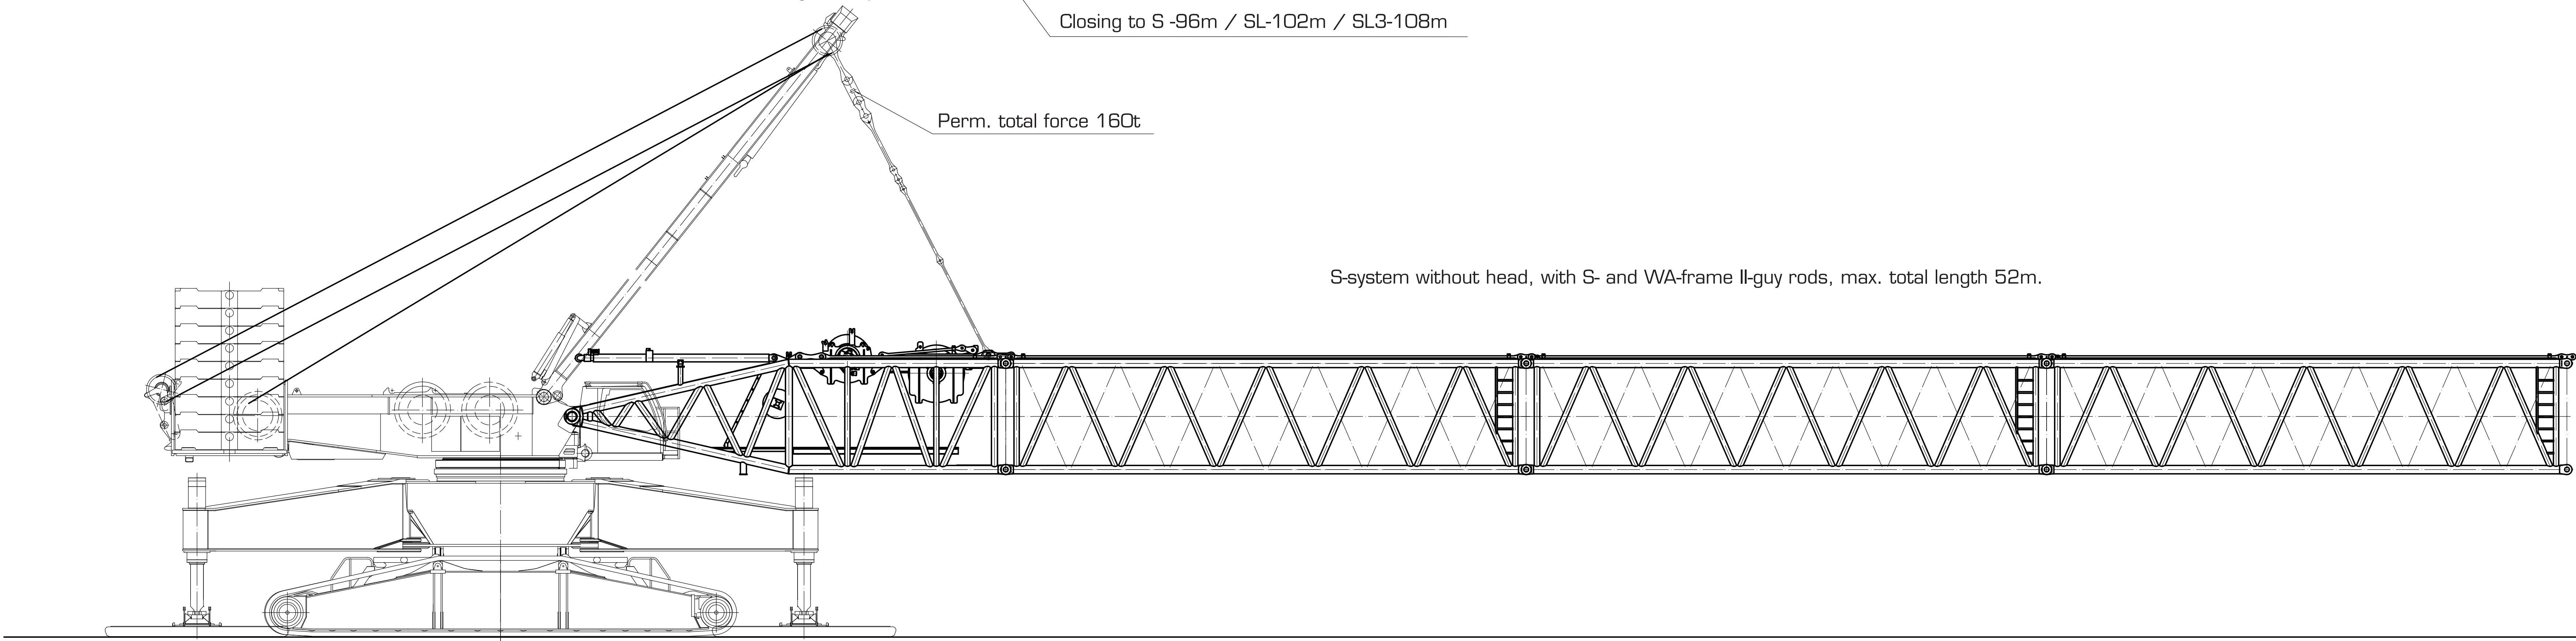


Closing the system

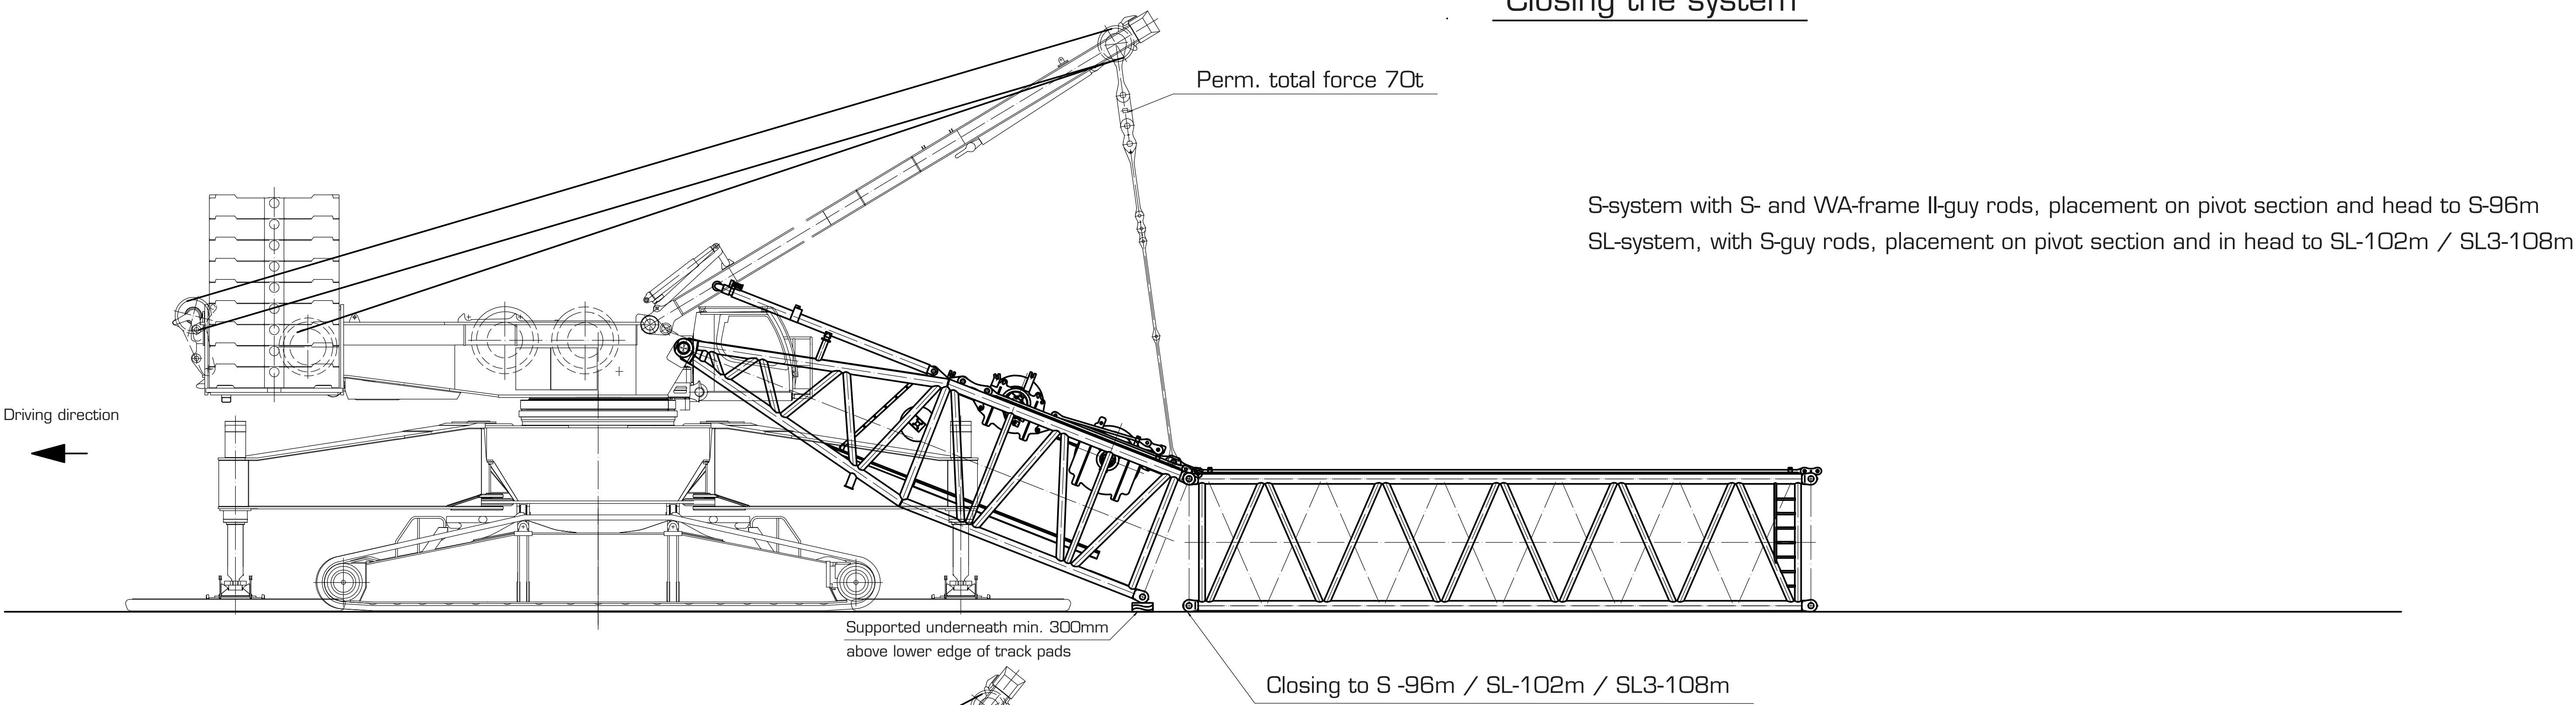


Caution Assembly note:

- Support base and ballast according to erection chart according to boom length
- Turntable set against travel direction or sideways
- S-pivot section supported underneath to min. 300mm above lower edge of track pads - S-pivot section supported underneath to min. 300mm above lower edge of track pads
- Assembly without hook block


For support base 17m x 10m pay attention to danger of collision of S-pivot section with support

Statically checked:	Administrator	Date	Name
	Department manager		
	Comment:		




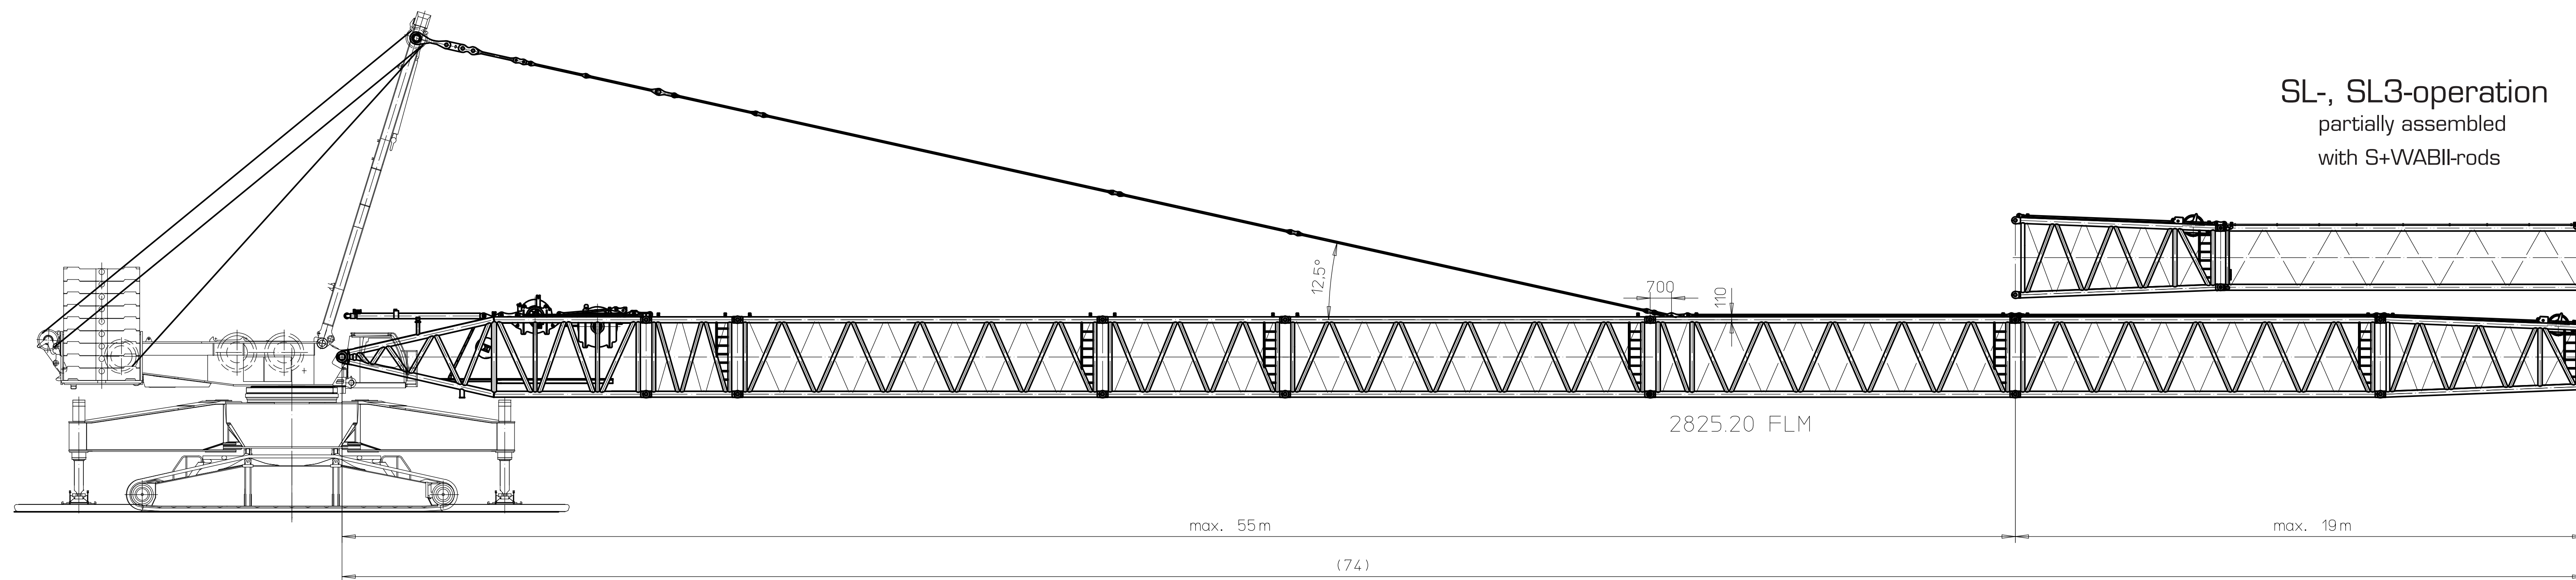


SL-, SL3-operation  
partially assembled  
with S+WABII-rods

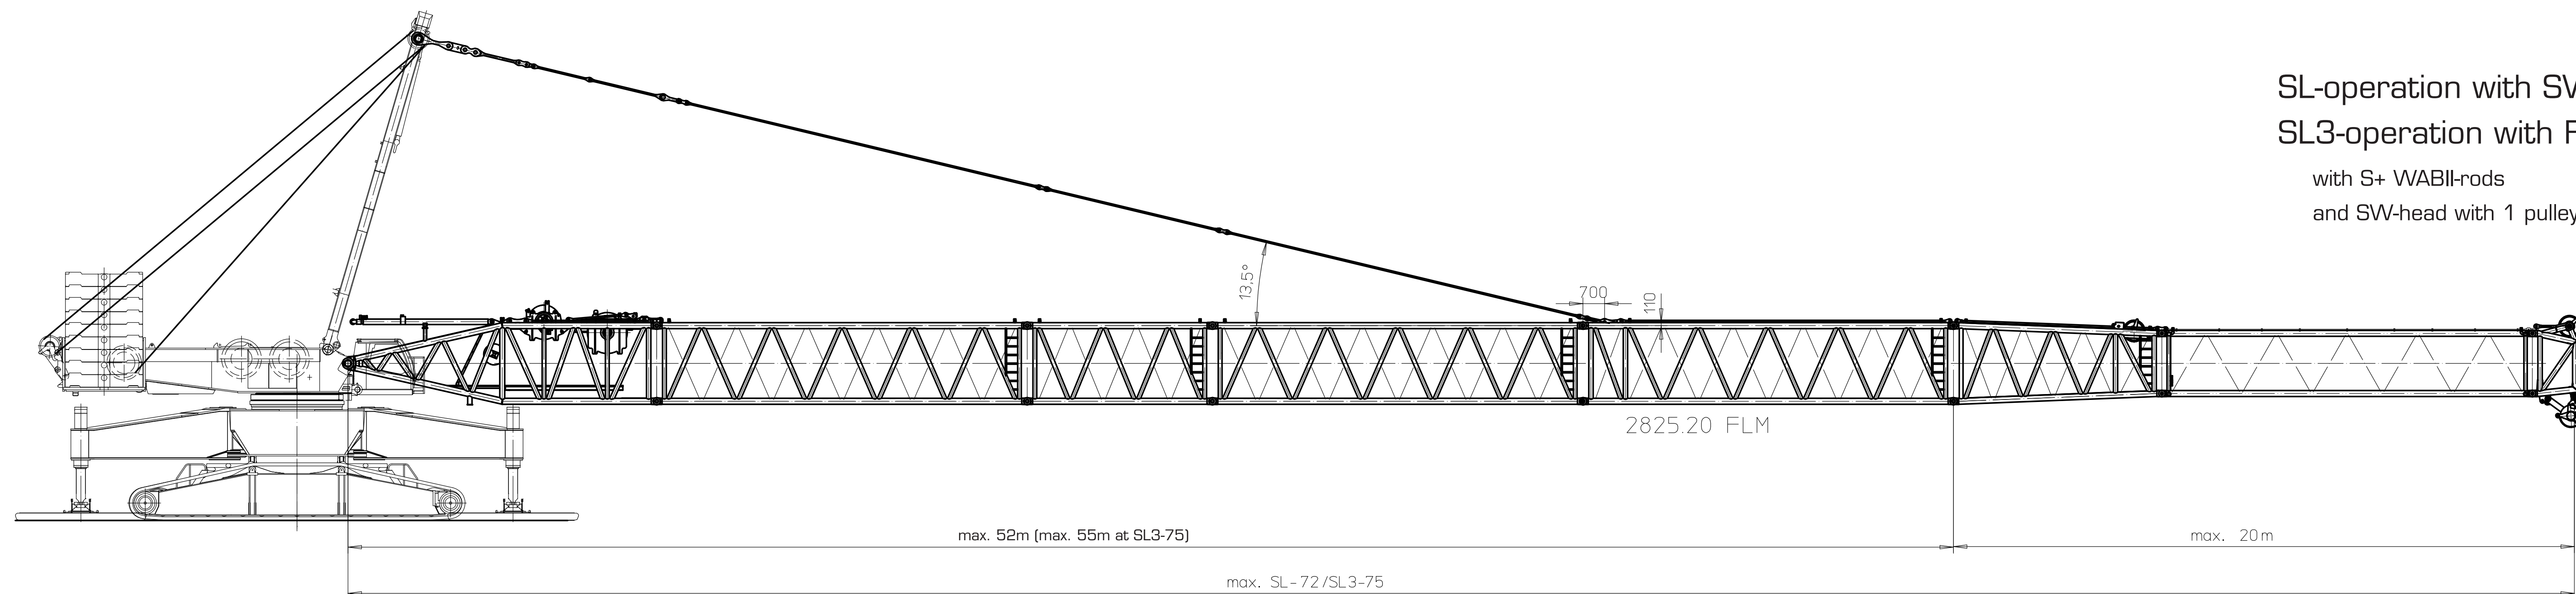

SL-operation with SW-head  
SL3-operation with F-adapter  
with S+ WABII-rods  
and SW-head with 1 pulley set or F-adapter

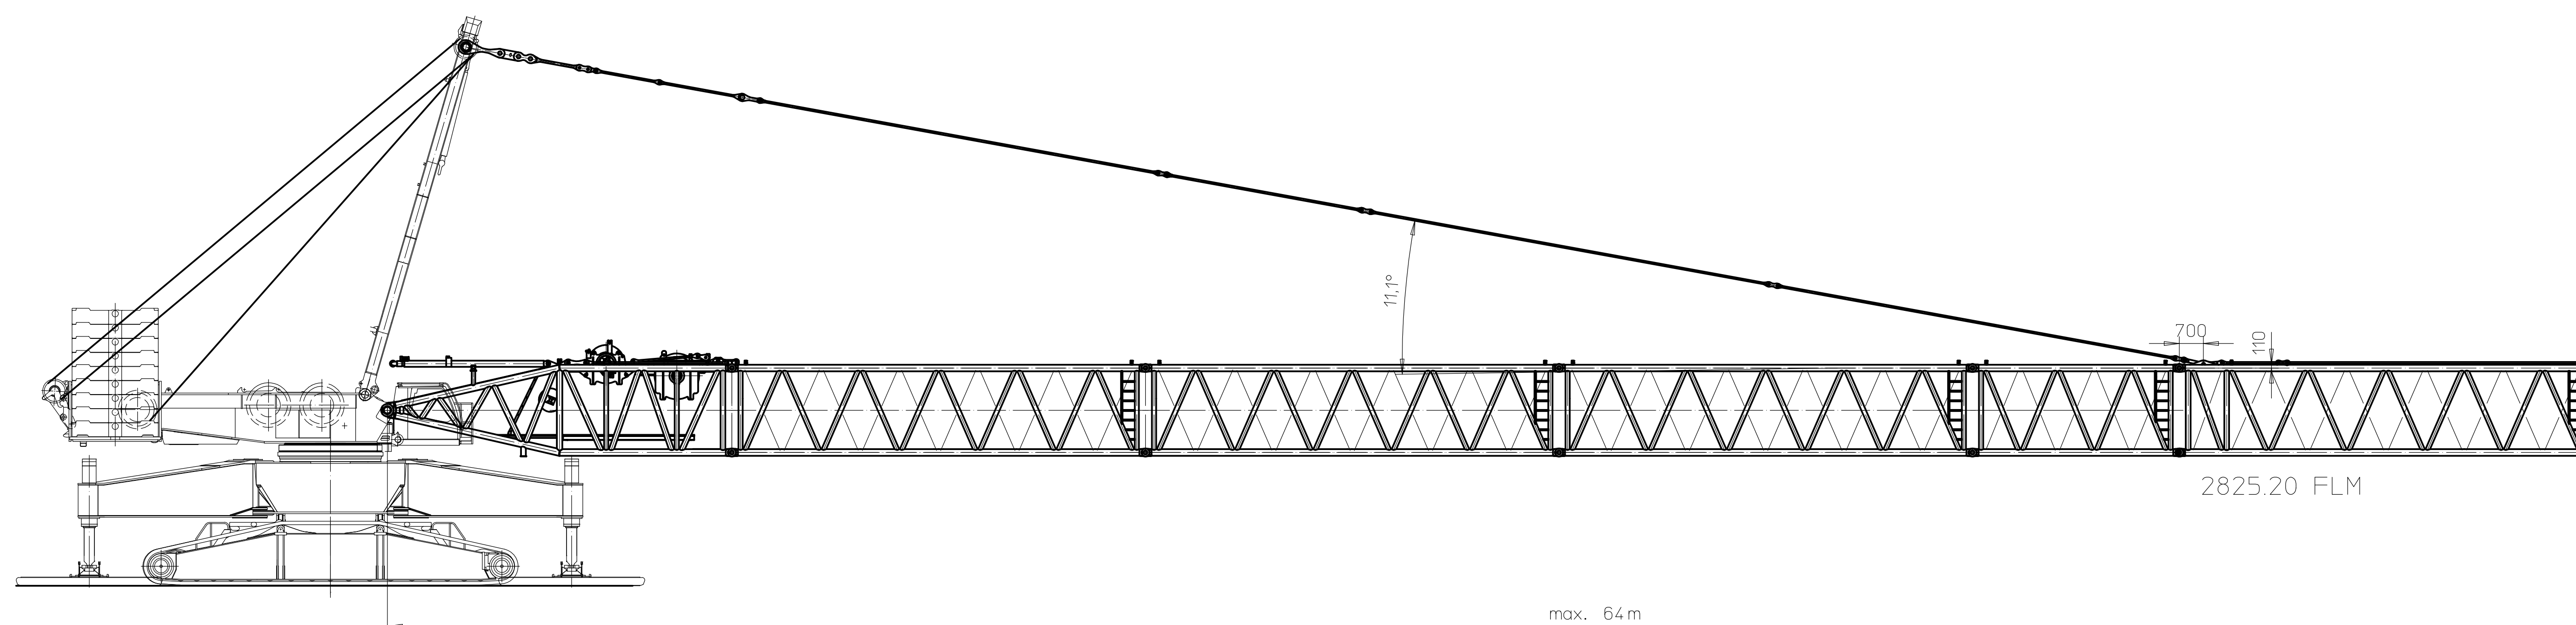

S-operation  
partially assembled  
with S+WABII-rods

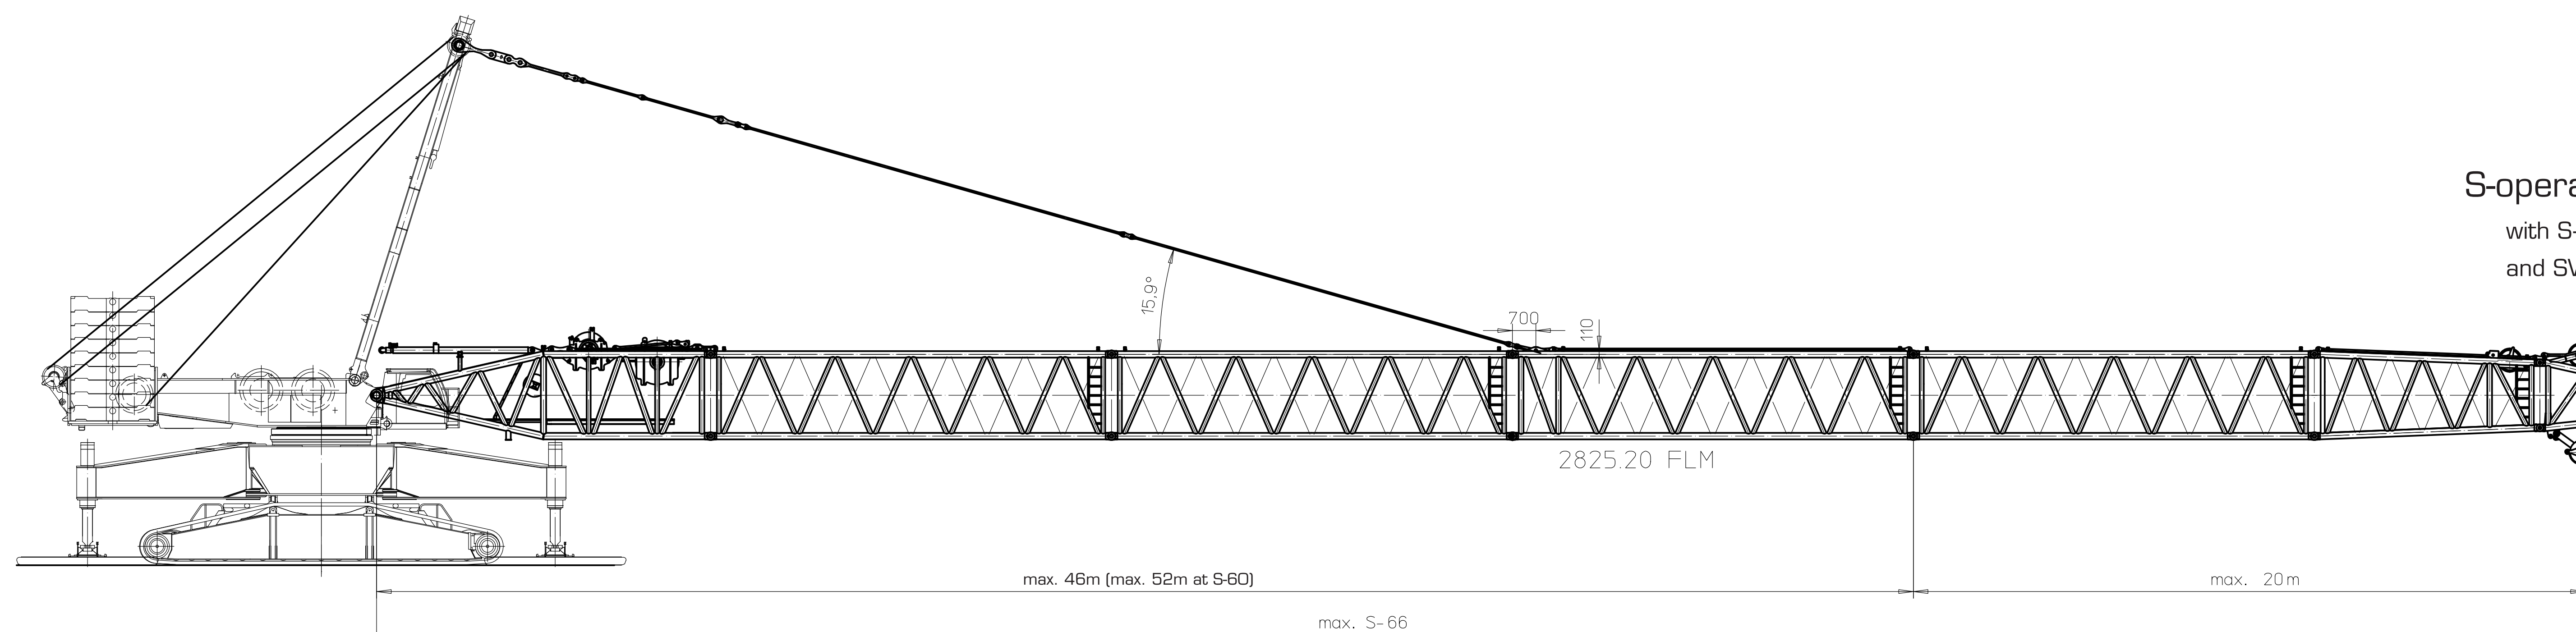

S-operation with SW-head  
with S+WABII-rods  
and SW-head with 2 pulley sets

Caution Assembly note:  
- Support base and ballast according to erection chart  
according to boom length  
- Turntable set against travel direction or sideways  
- Assembly without hook block