


max. permissible deflection

As of a boom length of 132m, close boom on the auxiliary guying. If the lower pins can be plugged during closing, support must take place so that the max. distance to the stack is 0.9m.

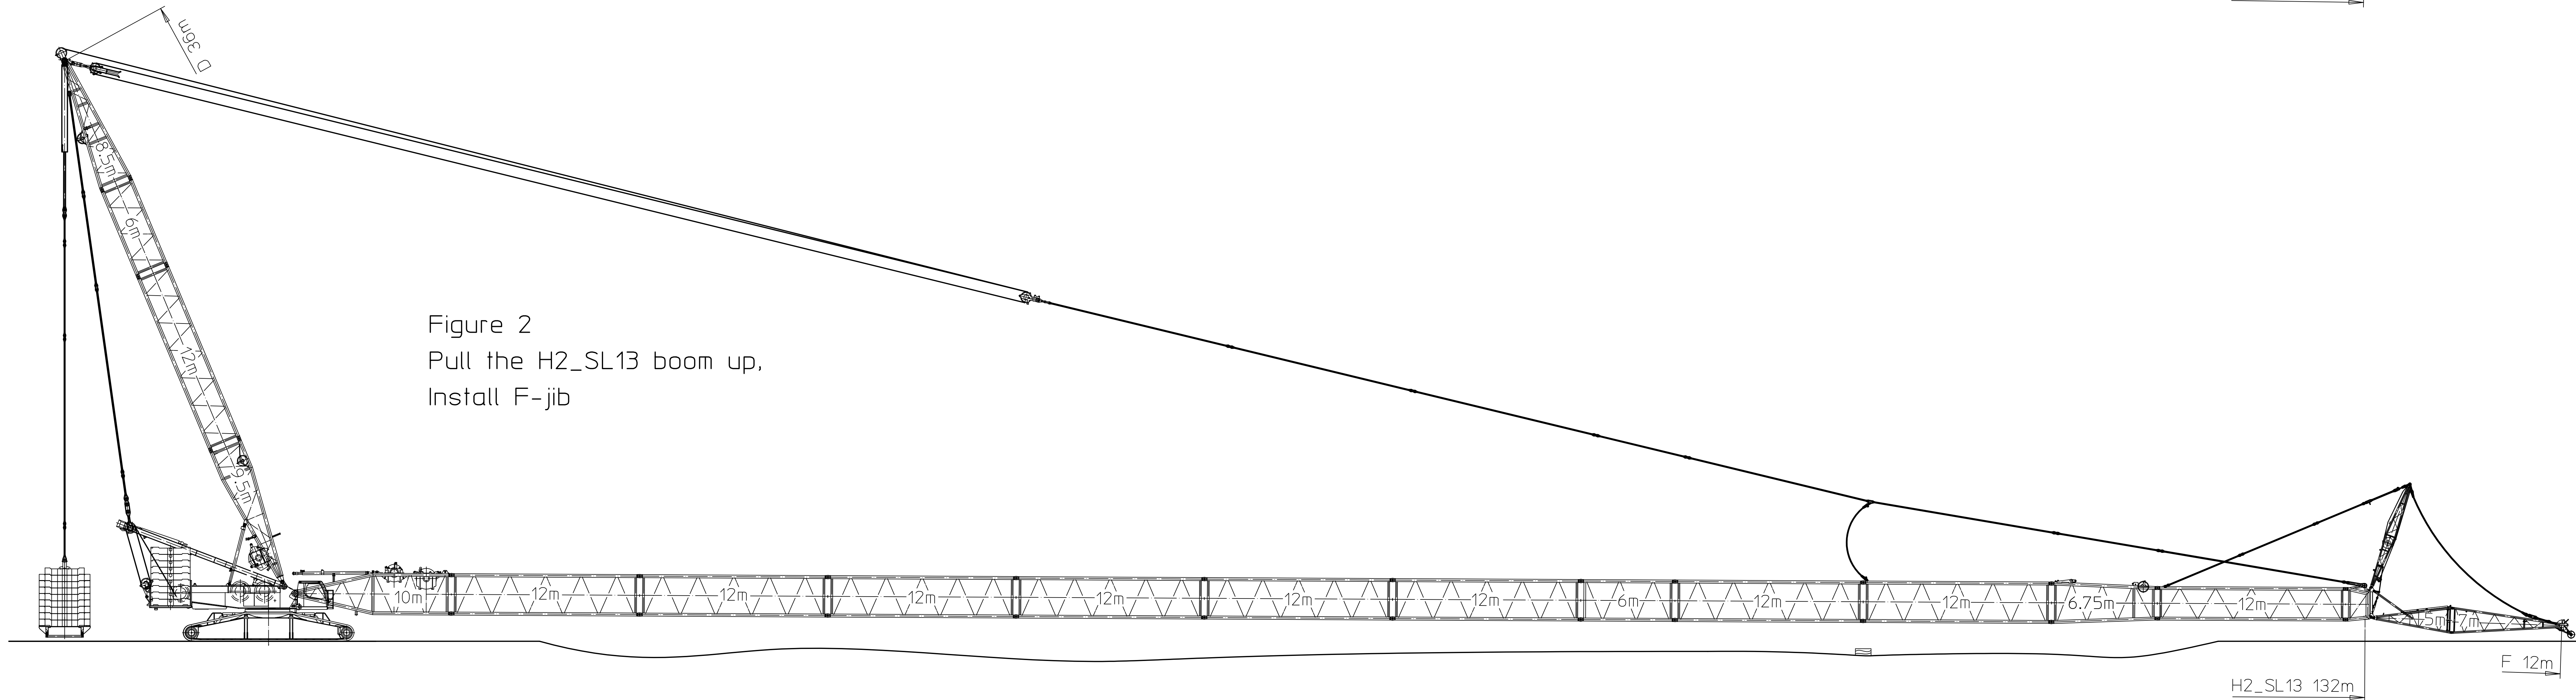

Support H2_SL13DFB/B2

Static inspected:	Administrator	Date	Name	Signature
	Team leader			
	Dep. manager		Henkel	
Comment:				

Fertiggewicht/Weight/Poids		Tolerierung Tolerance tolérance	ISO 8015	Weitere Anforderungen siehe Teilleistungs- further specifications see parts master record autres spécifications cf. nomenclature
Dokumentation Distribution Documentation		Rechtserstellung recting usage technique	ISO 2768-mk	
Bearbeitung/Finish/Usinage		Schweißkonstruktionen welded structure Constructions soudées	ISO 13920 BF	
Projektion E		Datum Date/Date	Name Name/Non	Für die Herstellung der Liefergegenstände göhen die aktuellen Fertigungsanweisungen For the delivery of all items the newest documents apply Les documents de fabrication actuels à disposition s'y lisent
Bezeichnung/Description/Dénomination		1:150	ASSEMBLY DRAWING H2_SL13.SUBSTRUCTURE	Ident Nr./Ident No./N°d'ident 1666-720.00.03.028-000 9803 3048