E-BOX BACKPLATE 460×460 mm (enclosure 500×500×200 IP65, rear of the top module)

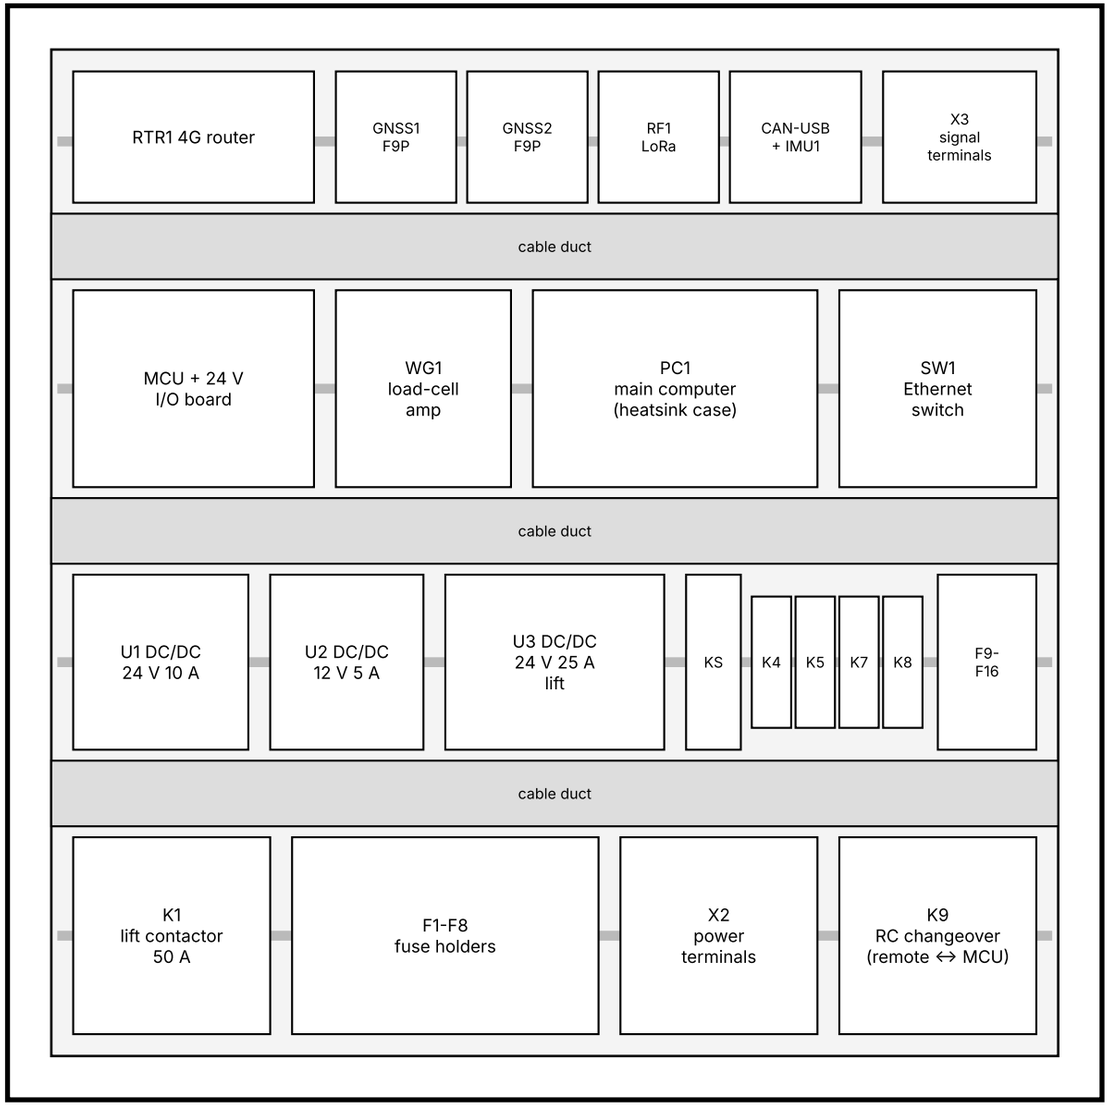

RIGHT SIDE: S1 key isolator for the top module
LEFT SIDE: IP65 breather vent + filter fan (thermostat 40 °C)
DOOR: nothing mounted (keeps it sealed)

BUILD NOTES
- motor controllers stay in the base (vendor)
- power wiring kept in row A, signals rows C/D
- CAN and Ethernet away from motor cables
- label every wire both ends with its number
- all connectors IP67: Deutsch DT (signals), M12 (sensors/CAN/ETH), Anderson (power)

BOTTOM FACE (all cables enter from below, drip loop):

- X10 base drive interface (CAN / RS485 or RC lead)
- X11 base E-stop / enable loop (2 ch)
- X12 power tap from base battery (2 × 6 mm²)
- X13 lift M3/M4 + limits S5/S6
- X14 load cells LC1-LC4 (4× M12)
- X15 front bar: LiDAR, CAM-F, ES1/ES2, edge BF
- X16 rear: ES3/ES4, CAM-R, HMI1, beacon, BR, GNSS1/2
- nothing goes into the base except X10-X12

BINBOT — autonomous olive bin carrier

E-BOX LAYOUT (front view, door open)

DWG E-04 REV C SCALE ≈ 1:4 mm

PRELIMINARY 2026-10-28