


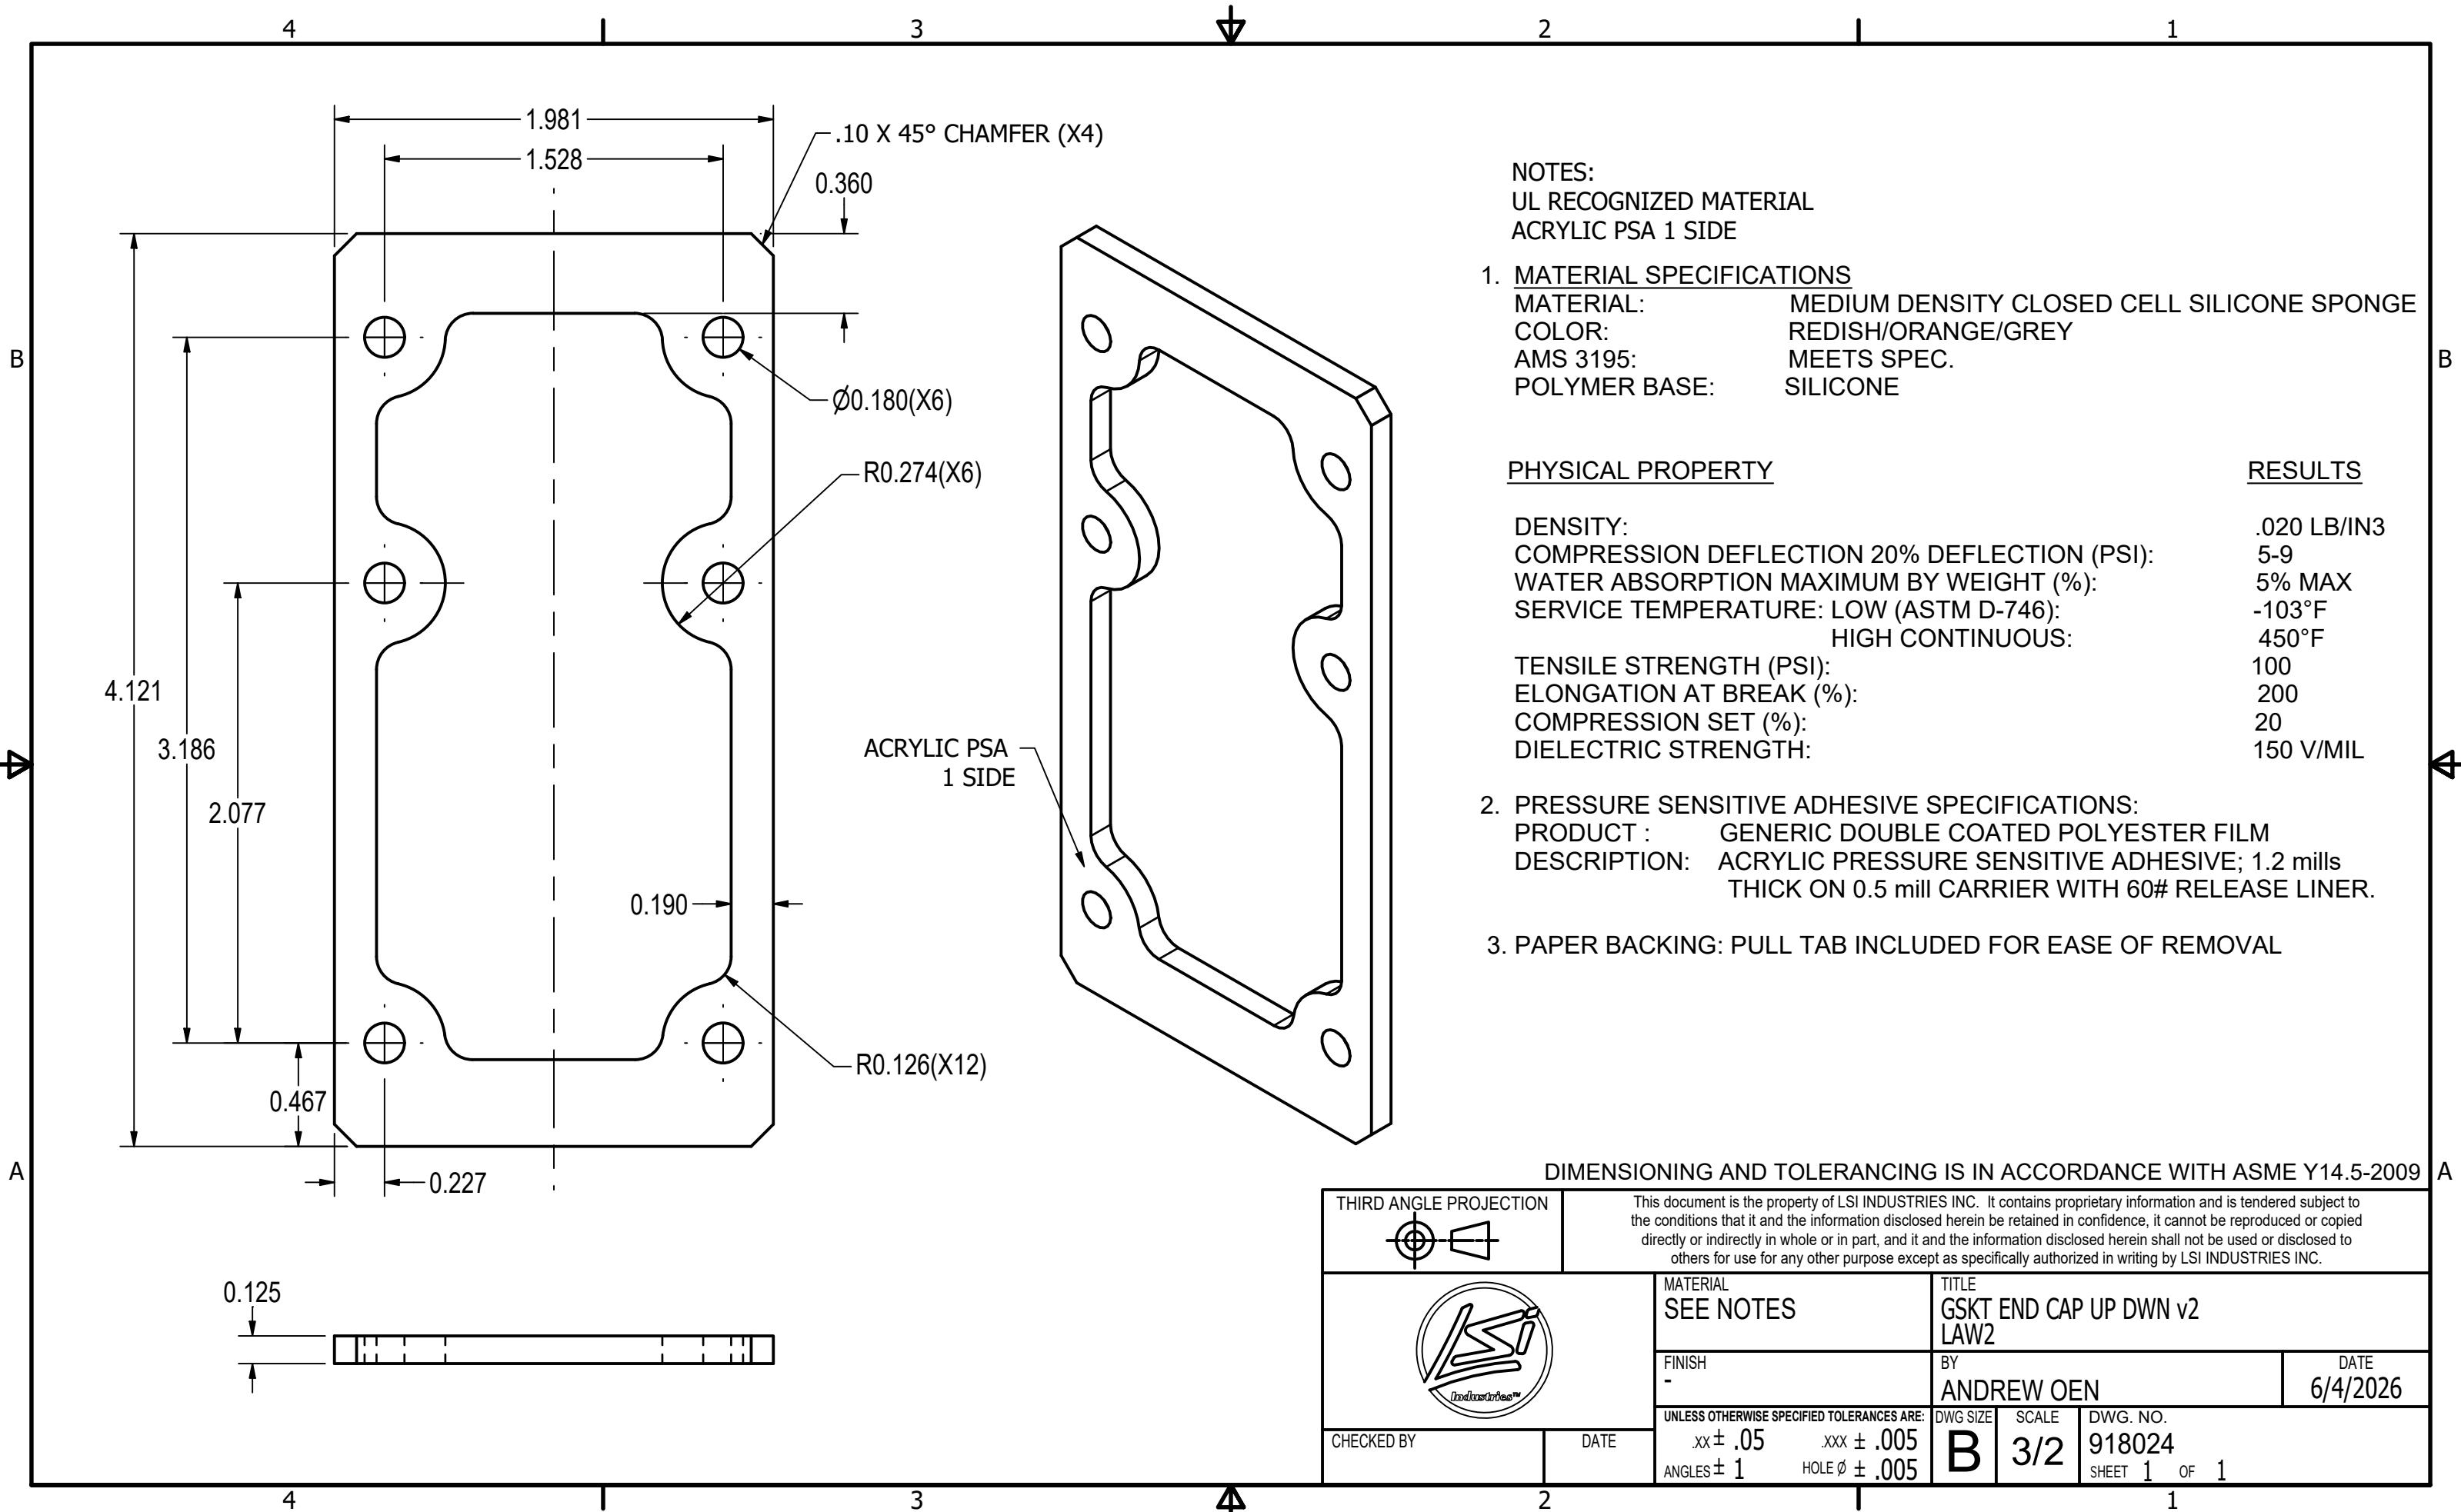


NOTES:
UL RECOGNIZED MATERIAL
ACRYLIC PSA 1 SIDE

1. MATERIAL SPECIFICATIONS
MATERIAL: MEDIUM DENSITY CLOSED CELL SILICONE SPONGE
COLOR: REDISH/ORANGE/GREY
AMS 3195: MEETS SPEC.
POLYMER BASE: SILICONE

PHYSICAL PROPERTY	RESULTS
DENSITY:	.020 LB/IN3
COMPRESSION DEFLECTION 20% DEFLECTION (PSI):	5-9
WATER ABSORPTION MAXIMUM BY WEIGHT (%):	5% MAX
SERVICE TEMPERATURE: LOW (ASTM D-746):	-103°F
HIGH CONTINUOUS:	450°F
TENSILE STRENGTH (PSI):	100
ELONGATION AT BREAK (%):	200
COMPRESSION SET (%):	20
DIELECTRIC STRENGTH:	150 V/MIL

2. PRESSURE SENSITIVE ADHESIVE SPECIFICATIONS:
PRODUCT : GENERIC DOUBLE COATED POLYESTER FILM
DESCRIPTION: ACRYLIC PRESSURE SENSITIVE ADHESIVE; 1.2 mills
THICK ON 0.5 mill CARRIER WITH 60# RELEASE LINER.
3. PAPER BACKING: PULL TAB INCLUDED FOR EASE OF REMOVAL

DIMENSIONING AND TOLERANCING IS IN ACCORDANCE WITH ASME Y14.5-2009

THIRD ANGLE PROJECTION 		This document is the property of LSI INDUSTRIES INC. It contains proprietary information and is tendered subject to the conditions that it and the information disclosed herein be retained in confidence, it cannot be reproduced or copied directly or indirectly in whole or in part, and it and the information disclosed herein shall not be used or disclosed to others for use for any other purpose except as specifically authorized in writing by LSI INDUSTRIES INC.		
		MATERIAL SEE NOTES	TITLE GSKT END CAP UP DWN v2 LAW2	
		FINISH -	BY ANDREW OEN	DATE 6/4/2026
		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: .xx ± .05 .xxx ± .005 ANGLES ± 1 HOLE Ø ± .005	DWG SIZE B	SCALE 3/2
CHECKED BY	DATE	DWG. NO. 918024	SHEET 1 OF 1	