




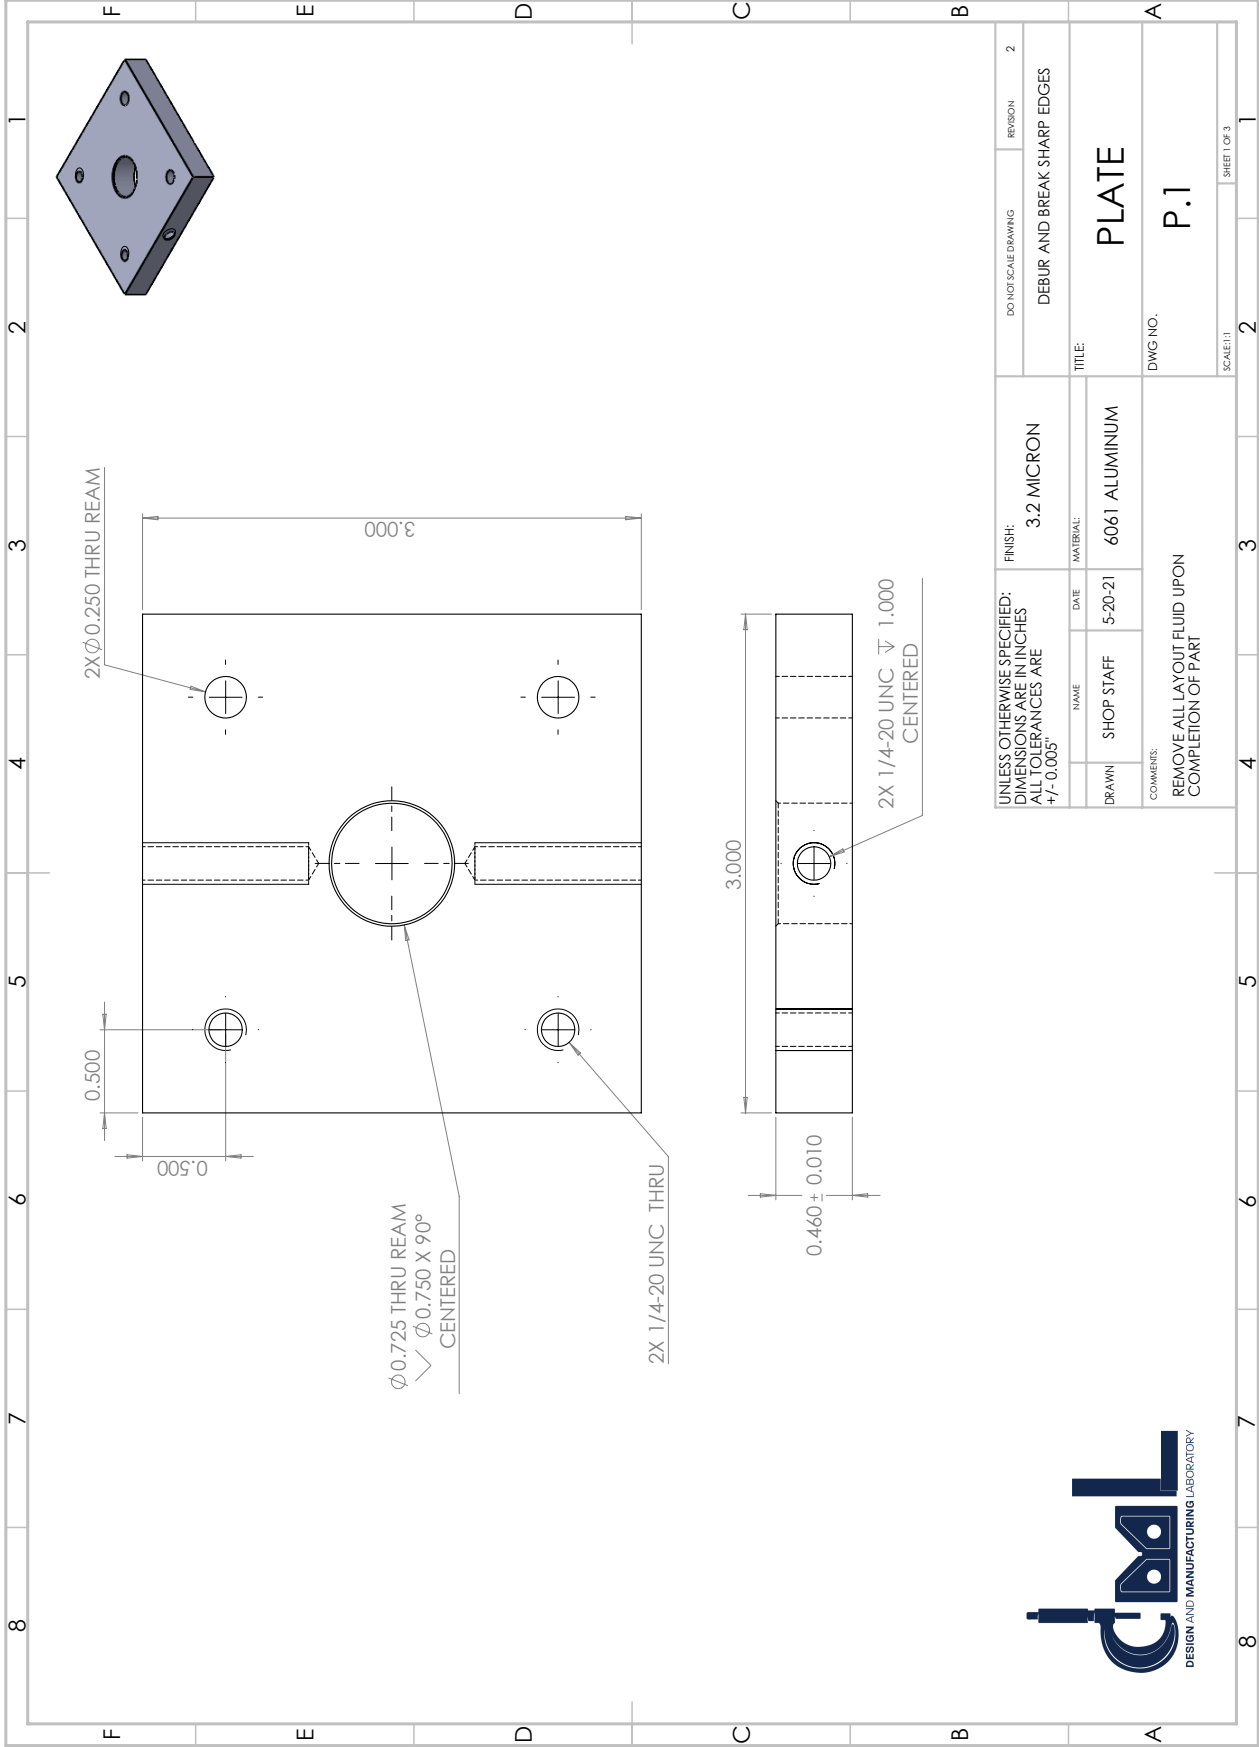

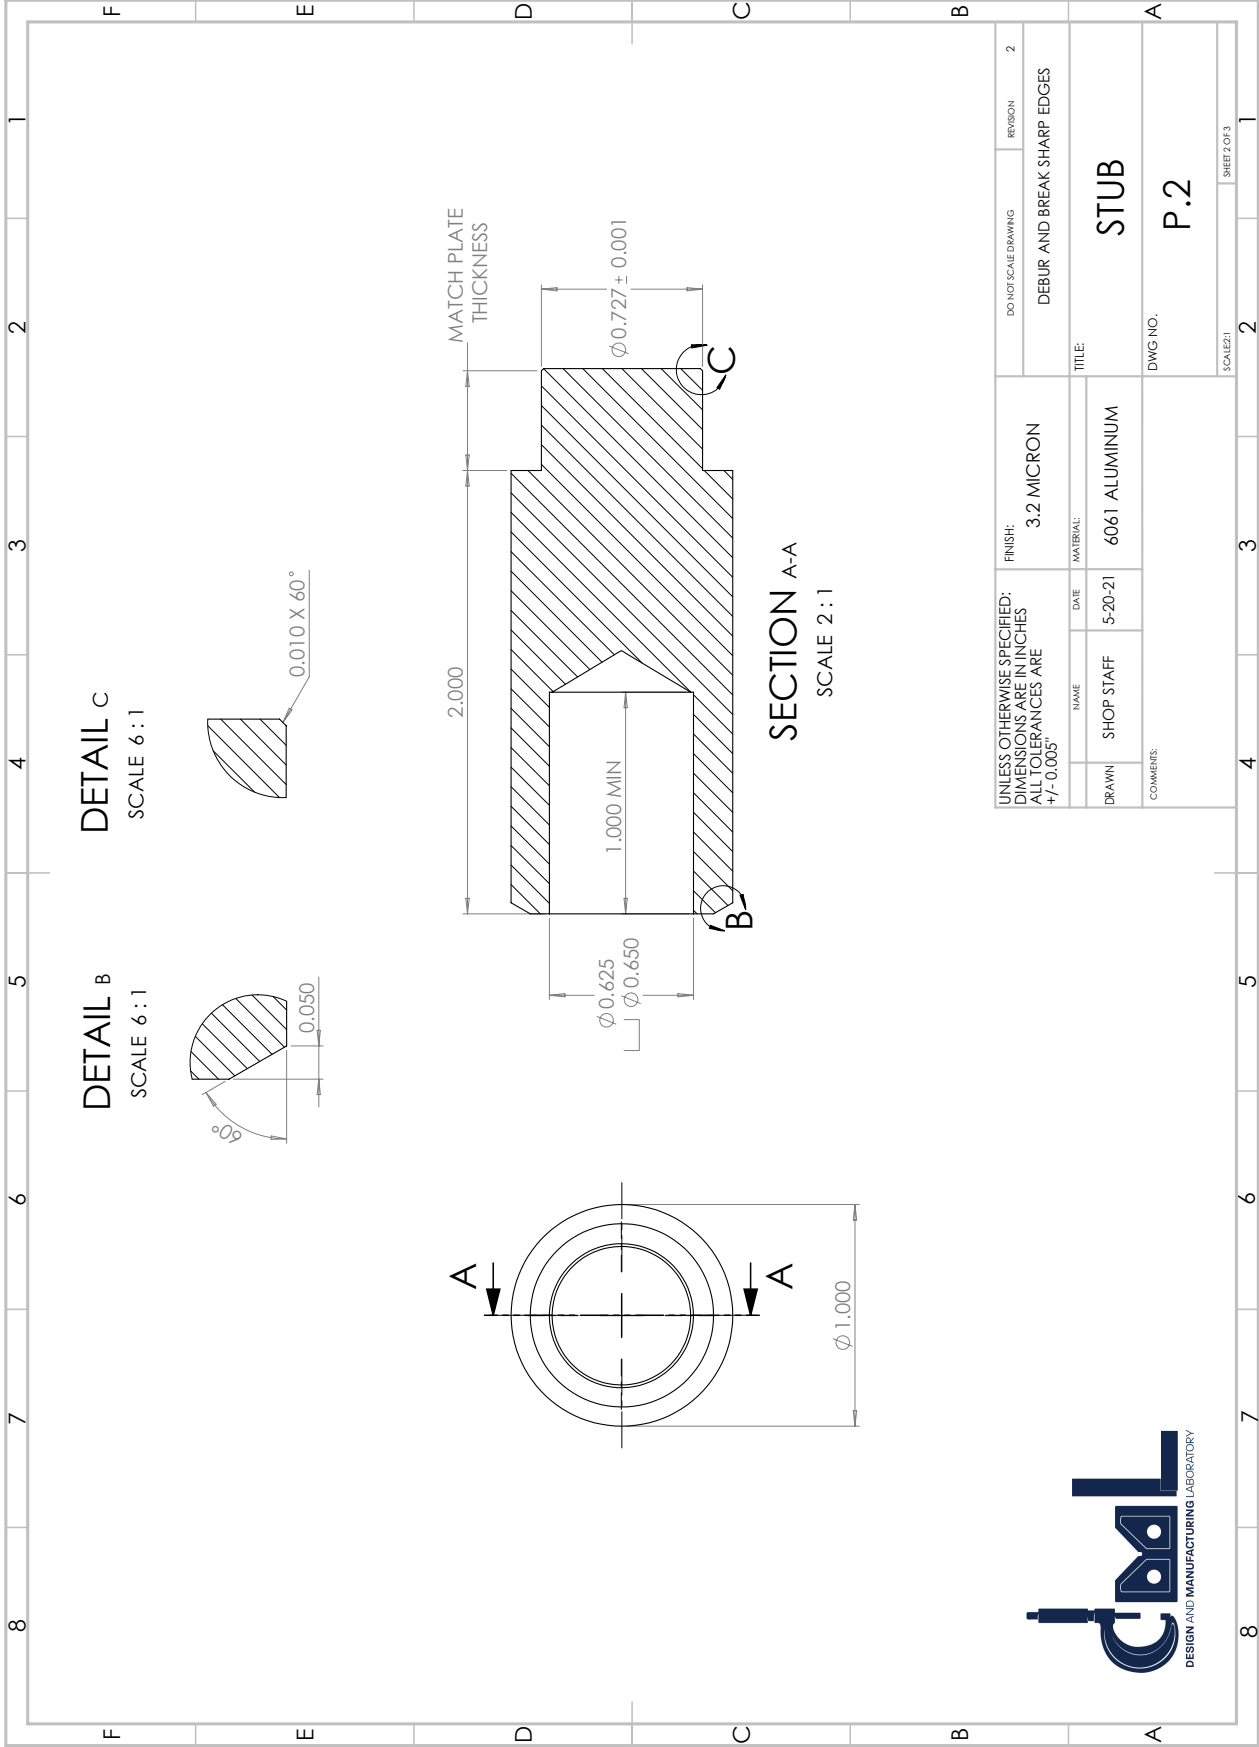

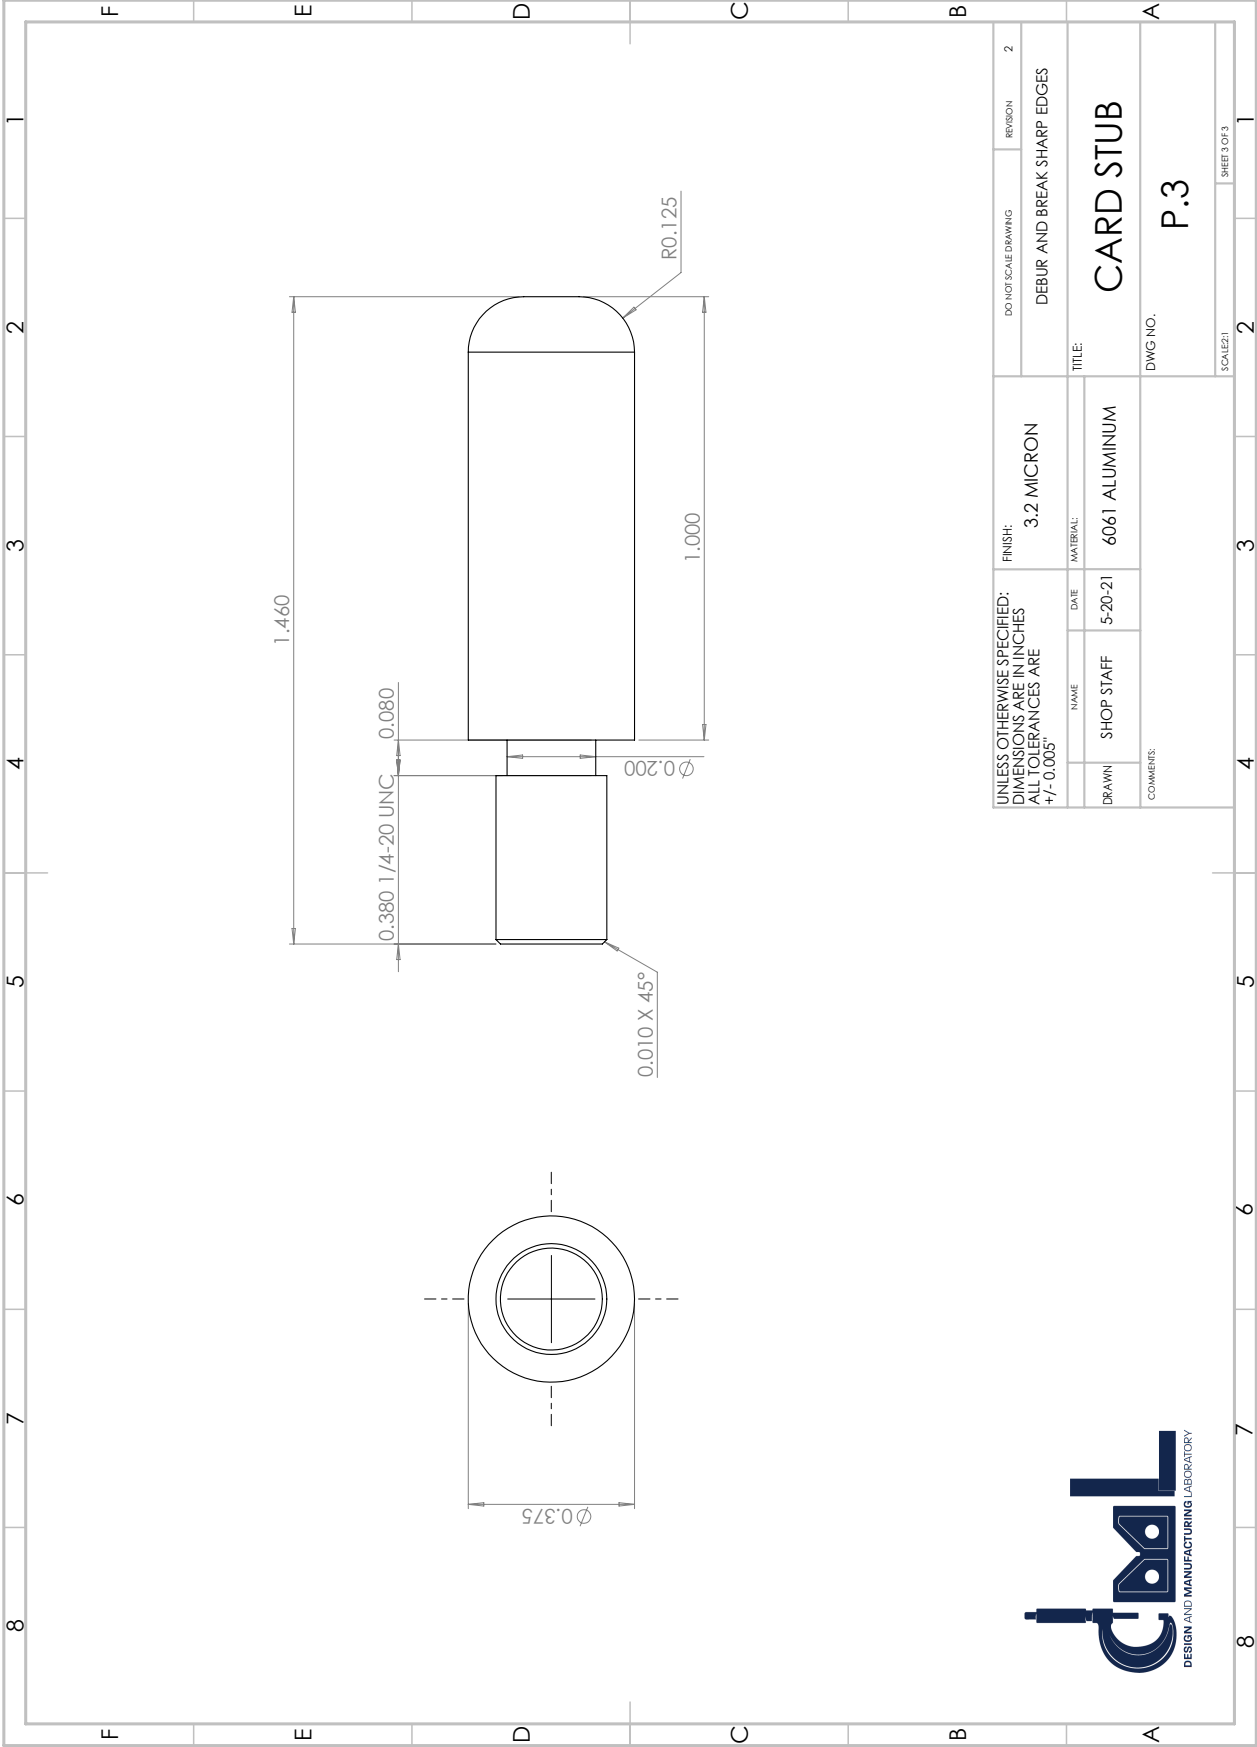

DML Flag Holder Inspection Sheet

Student Name:			
Auburn Email:			
Lab Section:			
Semester:	Fall	Spring	Summer
Picking Up Project?	YES/ NO (PLEASE CIRCLE ONE)		
Final Grade:	____/100	TA Initials:	

Assembly			
<i>**If Unpressed Project Does Not Qualify**</i>			
Feature	Qualification		Points Earned
Original Plate Stock	YES	0 pts	
	NO	-5 pts	
Original Cylinder Stock	YES	0 pts	
	NO	-5 pts	
Project Deburred	YES	2 pts	
	NO	0 pts	
Plate is Square (No space between plate and square)	YES	2 pts	
	NO	0 pts	
Project Sits Flat on the Table	YES	4 pts	
	NO	0 pts	
Flush Press Fit (No paper slides to Stub)	YES	2 pts	
	NO	0 pts	
Threaded Pins ***Bonus (All or Nothing)***	YES	+ 5 pts	
	NO	0 pts	
Total Points on Assembly			____/10

Stub			
<i>** If Measurement/Qualification is outside double the tolerance, Points Earned will be Zero**</i>			
Feature	Measurement/Qualification	Tolerance	Points Earned
Barrel Diameter 1.000 ± 0.005 in.		Within ± 0.005	6 pts
		Within ± 0.010	3 pts
Bore Hole Diameter 0.650 ± 0.005 in.		Within ± 0.005	6 pts
		Within ± 0.010	3 pts
Barrel Height 2.000 ± 0.005 in.		Within ± 0.005	6 pts
		Within ± 0.010	3 pts
Bevel Edge Height Min. 1.950 in.	YES		4 pts
	NO		0 pts
Bore Depth Min 1.000 in.	YES		6 pts
	NO		0 pts
Surface Finish	≤ 3.2 µmRa		4 pts
	6.3 µmRa		2 pts
	> 6.3 µmRa		0 pts
Total Points for Stub			____/32

Notes:

Plate				
** If Measurement/Qualification is outside double the tolerance, Points Earned will be Zero**				
Feature	Measurement/Qualification	Tolerance		Points Earned
Side Length A 3.000 ± 0.005 in.		Within ± 0.005	4 pts	
		Within ± 0.010	2 pts	
Side Length B 3.000 ± 0.005 in.		Within ± 0.005	4 pts	
		Within ± 0.010	2 pts	
Side Length C 3.000 ± 0.005 in.		Within ± 0.005	4 pts	
		Within ± 0.010	2 pts	
Side Length D 3.000 ± 0.005 in.		Within ± 0.005	4 pts	
		Within ± 0.010	2 pts	
Plate Thickness 0.460 ± 0.010 in.		Within ± 0.010	2 pts	
		Within ± 0.020	1 pts	
Blind Hole A Left/Right Centered ± 0.005 in.	L:	Within ± 0.005	2 pts	
	R:	Within ± 0.010	1 pts	
Blind Hole A Top/Bottom Centered ± 0.005 in.	L:	Within ± 0.005	2 pts	
	R:	Within ± 0.010	1 pts	
Blind Hole B Left/Right Centered ± 0.005 in.	L:	Within ± 0.005	2 pts	
	R:	Within ± 0.010	1 pts	
Blind Hole B Top/Bottom Centered ± 0.005 in.	L:	Within ± 0.005	2 pts	
	R:	Within ± 0.010	1 pts	
Tapped Thru Hole A X : 0.399 ± 0.005 in.		Within ± 0.005	2 pts	
		Within ± 0.010	1 pts	
Tapped Thru Hole A Y: 0.399 ± 0.005 in.		Within ± 0.005	2 pts	
		Within ± 0.010	1 pts	
Tapped Thru Hole B X : 0.399 ± 0.005 in.		Within ± 0.005	2 pts	
		Within ± 0.010	1 pts	
Tapped Thru Hole B Y: 0.399 ± 0.005 in.		Within ± 0.005	2 pts	
		Within ± 0.010	1 pts	
Reamed Thru Hole A X : 0.375 ± 0.005 in.		Within ± 0.005	2 pts	
		Within ± 0.010	1 pts	
Reamed Thru Hole A Y: 0.375 ± 0.005 in.		Within ± 0.005	2 pts	
		Within ± 0.010	1 pts	
Reamed Thru Hole B X : 0.375 ± 0.005 in.		Within ± 0.005	2 pts	
		Within ± 0.010	1 pts	
Reamed Thru Hole B Y: 0.375 ± 0.005 in.		Within ± 0.005	2 pts	
		Within ± 0.010	1 pts	
Stub Hole Centered ± 0.005 in.	Centered in X Position-YES/NO Centered in Y Position-YES/NO	YES BOTH	4 pts	
		YES FOR 1	2 pts	
1/4-20 UNC Thread	Blind Hole A- Y/N Tapped Thru Hole A- Y/N	2 pts each		
	Blind Hole B- Y/N Tapped Thru Hole B- Y/N			
Surface Finish **All Sides Will Be Inspected **	≤ 3.2 µmRa		4 pts	
	6.3 µmRa		2 pts	
	> 6.3 µmRa		0 pts	
Total Points for Plate				_____/58