

APPLICATION		REVISIONS			APPROVALS	
NEXT ASSY	PROJECT NO.	ECN NO.	REV	DESCRIPTION	DATE	APPROVED
	13196	CO-0000075768	A	PRODUCTION RELEASE	8/21/2017	VINCE LAI
		CO-0000094095	B	RELEASE -014	9/25/2019	VINCE LAI
		CO-0000099694	C	. UPDATE PEAK LOAD . UPDATE LABEL DRAWING	2/17/2020	VINCE LAI


HP CONFIDENTIAL THIS DOCUMENT AND ANY ASSOCIATED DATA CONTAIN RESTRICTED INFORMATION THAT IS HP PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY HP.	APPROVALS		DATE	 HERA+ 65W AC ADAPTER, nPFC 3Pin RC 4.5mm		
	DRAWN	VINCE LAI	3/6/17			
	CHECKED					
	DSGN ENGR	VINCE LAI	3/6/17			
	ENG					
	MFG					
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [MILLIMETERS]. TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 [0.5] .XXX ± .010 [0.25]	QA			SIZE A	DRAWING NO. L25298	REV C
	LEGAL					
	AGENCY					
	DO NOT SCALE DRAWING					

TABLE OF CONTENTS

1. SCOPE	4
2. REFERENCE DOCUMENTS	4
2.1 APPLICABLE DOCUMENTS.....	4
2.2 ORDER OF PRECEDENCE	6
3. GENERAL FUNCTION DESCRIPTION	6
4. ELECTRICAL	6
4.1 INPUT	6
4.1.1 Voltage.....	6
4.1.2 Power Factor	6
4.1.3 Range Switching	7
4.1.4 Frequency	7
4.1.5 Current	7
4.1.6 Input Power Rating	7
4.1.7 Inrush Current	7
4.1.8 Protection	7
4.1.9 Energy Efficiency	9
4.2 OUTPUT	9
4.2.1 Voltage.....	9
4.2.2 Current	9
4.2.3 Power	10
4.2.4 Adapter Power Rating and ID	10
4.2.5 Transient Response.....	10
4.2.6 Output Regulation	10
4.2.7 Protection	10
4.2.8 Over Voltage	10
4.2.9 Over Current	10
4.2.10 Short Circuit	10
4.2.11 Outputs/Ripple/Noise	11
4.2.12 Stability	11
4.2.13 Overshoot	11
4.2.14 Power-On Time	11
4.2.15 Rise Time	11
4.2.16 Hold Up	11
4.2.17 Acoustic Test	11
4.2.18 System Capacitive Load	11
4.2.19 Thermal Shutdown.....	12
5. ENVIRONMENTAL REQUIREMENTS	12
5.1 TEMPERATURE.....	12
5.1.1 Operating	12
5.1.2 Non-Operating	12
5.2 COOLING	12
5.3 HUMIDITY	12
5.4 ALTITUDE	12
5.4.1 Operating	12
5.4.2 Non-Operating	12
5.5 MECHANICAL SHOCK.....	12
5.5.1 Operating	12
5.5.2 Non-Operating	12
5.5.3 UL Safety	12
5.5.4 Shipping	13



SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN

SCALE 1/1

SHEET 2 OF 24

5.6	VIBRATION	13
5.6.1	Operating	13
5.6.2	Non-Operating	13
5.7	ELECTROSTATIC DISCHARGE (ESD)	13
5.8	ECO ENVIRONMENTAL	13
5.8.1	General Requirements	13
5.8.2	Supplemental Environmental Specification	13
5.8.3	Other ECO Requirements	14
6.	AGENCY APPROVALS	15
7.	RELIABILITY	16
7.1	DERATING GUIDELINES	16
7.1.1	E-Caps life time	16
7.1.2	E-Caps Charge / discharge cycles	16
7.1.3	Critical Components	17
8.	INTERCONNECTION	18
9.	MARKINGS	19
10.	MECHANICAL	20
10.1	DIMENSIONS	20
10.2	MATERIAL	20
10.3	COLOR	20
10.4	EXTURE	20

LIST OF FIGURES

FIGURE 1	OUTPUT CABLE	18
FIGURE 2	ADAPTER HOUSING(LITEON)	208
FIGURE 3	ADAPTER HOUSING(CHICONY)	209
FIGURE 4	ADAPTER HOUSING(DELTA)	30
FIGURE 5	ADAPTER HOUSING(ACBEL)	31

LIST OF TABLES

TABLE 1	REFERENCE TABLE	4
TABLE 2	POWER LINE TRANSIENT REQUIREMENTS	8
TABLE 3	EPS CRITICAL COMPONENTS CRITERIA	17



SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN

SCALE 1/1

SHEET 3 OF 24

1. SCOPE

This document defines the functional requirements for an enclosed **65 WATT SINGLE OUTPUT AC-TO-DC AC ADAPTER** intended for worldwide use in Information Technology Equipment. The power supply unit shall be convection cooled.

The information in this document must be used in accordance with HP policies with regard to the use and disclosure of HP Confidential information. Signed Confidential Disclosure Agreements (CDA's) must be on file prior to the disclosure of this Document with any external supplier.

This specification defines the EPS (External Power Supply) requirements. The design of this product must follow the supplier design guides (all suppliers), except where those guidelines conflict with the specified product requirements.

The HP part numbers directly influenced by this specification are defined in Table 1.

The EPS Model Numbers are identified in Table 1 The EPS manufacturer name and model name listed in this document which is for AVL (Approved Vendor List Candidate). The AVL (Approved Vendor List) firm is not to be used until production release.

In the event of a conflict between this specification and references cited herein, this specification shall take precedence.

**TABLE 1
REFERENCE TABLE**

HP P/N	DESCRIPTION	ASSY CODE	SPARES P/N	RMN	VENDOR P/N
L25298-001	ADPTR 65W nPFC Smart 3P RC 4.5mm, Lite-On	HHRF	710412-001	TPN-LA16	PA-1650-20HL
L25298-002	ADPTR 65W nPFC Smart 3P RC 4.5mm, Chiony	HGRH		TPN-CA16	A065R157P
L25298-003	ADPTR 65W nPFC Smart 3P RC 4.5mm, Delta	HHWL		TPN-DA17	ADP-65AE BA
L25298-004	ADPTR 65W nPFC Smart 3P RC 4.5mm, AcBel	HGRN		TPN-AA06	ADH032-020G
L25298-014	ADPTR 65W nPFC Smart 3P RC 4.5mm, AcBel	JLJE		TPN-AA06	ADH032-022G

2. REFERENCE DOCUMENTS

2.1 APPLICABLE DOCUMENTS

The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the document is of the issue in effect on the date of invitation to bid or request for proposal.

ANSI C63.4 – 2009 "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz." American National Standards Institute (ANSI), 2009.

AS/NZS 60950.1:2011 "Information technology equipment - Safety, Part 1: General requirements" Australian Standards Association.



SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN

SCALE 1/1

SHEET 4 OF 24

Australian Communications & Media Authority	"Electromagnetic Compatibility Compliance and Labelling – Information for Suppliers of electrical and electronic devices, vehicles and devices with internal combustion engines in Australia, Sept 2008, URL: http://www.acma.gov.au .
C.I.S.P.R. Pub. 32	"Limits and methods of measurement of radio interference characteristics of information technology equipment." International Special Committee on Radio Interference (C.I.S.P.R.).
CPS Scheme (PSB)	"Safety Authority for the Singapore Consumer Protection registration scheme. Information Booklet" – 4, 1991 as amended through 2014.
EN 55032	"Limits and methods of measurement of radio interference characteristics of information technology equipment." European Committee for Electro technical Standardization (CENELEC), 2010.
EN 55024	"Information technology equipment - Immunity characteristics - Limits and methods of measurement." European Committee for Electro technical Standardization (CENELEC), 2010.
EN 60320-1	"Appliance Couplers for Household and Similar General Purposes." European Committee for Electrotechnical Standardization (CENELEC), 1996, including A1:1996 and A2:1998.
EN 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements", Second Edition, European Committee For Electro technical Standardization (CENELEC), 2014.
EN 61000-3-2	"Electromagnetic Compatibility (EMC) Part 3: Limits, Section 2: Limits for Harmonics Current Emissions (Equipment input current $\leq 16A$ per phase)." European Committee for Electro technical Standardization (CENELEC).
EN 61000-3-3	"Electromagnetic compatibility (EMC) - Part 3-3 Limits - Limitation of voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current $\leq 16 A$ " European Committee for Electro technical Standardization (CENELEC).
GB17625.1-	Electromagnetic compatibility – Limits – Limits for harmonic current emissions (equipment input current $\leq 16A$ Per Phase), Issued 9Feb2003, effective 1May2003
GB4943.1-2011	"Information Technology Equipment – Safety – Part 1: General Issued 2010-12-1, Effective 2012-12-1.
GB9254-2008	Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement, Issued 6Aug2008, effective 1Sep2009
IEC 60950-1	"Safety of Information Technology Equipment - Safety - Part 1: General requirements", Second Edition, International Electro technical Commission, 2005+A1:2009, +A2:2013
IEC 62368-1	"Audio/video, information and communication technology equipment - Part 1: Safety requirements", Second Edition, 2014



SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN

SCALE 1/1

SHEET

5

OF

24

IEC 61000-4 Sections 2~6,8, 11 "Electromagnetic Compatibility (EMC) – Part 4: Testing and measurement techniques." International Electrotechnical Commission (IEC).

Korea MSIP Approval "EMC Registration Regulation", URL: <http://rra.go.kr>

NOM-019-SCFI-1998 "Safety of Data-Processing Equipment" Norma Oficial Mexicana, 1998.

Taiwan EMC Law "Commodity EMC Regulation" (Taiwan EMC Law), Bureau of Standards, Metrology, and Inspection under auspices of the Ministry of Economic Affairs, URL: <http://www.bsmi.gov.tw> .

UL 62368-1 / CAN/CSA C22.2 No. 62368-1-14 Audio/video, information and communication technology equipment" Underwriters Laboratories, Inc., Canadian Standards Association (operating as "CSA Group"), Second Edition, 2014.

NOTE: All regulatory standards shall be judged applicable at the most recently published and agency adopted revision of the standard for the certifying country.

2.2 ORDER OF PRECEDENCE

In the event of a conflict between this specification and references cited herein, this specification shall take precedence.

NOTE:

Compliance to the latest revision of HPInc General Specification for the Environment (GSE Document number HX-00011-00), including the RoHS Compliance Specification in the GSE, is required.

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>.

3. GENERAL FUNCTION DESCRIPTION

(For reference only) This specification describes a self-contained 65.0 Watt AC Adapter, powered from the AC Mains, and supplying a single direct current, constant voltage output. There is no power switch. Output power is supplied upon application of AC input through the line cord. The output cable is 1.8m long with 3 conductors - one for output power positive and one for return. The third conductor will provide an "ADAPTER POWER RATING and ID" signal proportional to the output load current and output power rating.

4. ELECTRICAL

4.1 INPUT

4.1.1 Voltage

The power supply shall be capable of supplying full rated output power over the input range of 90 to 265 VAC RMS. Nominal voltage is 120 VAC. The power supply shall be capable of start-up (power-on) at 90 VAC and 50 Hz minimum.

4.1.2 Power Factor

(For reference only.) The power factor, when measured at 120 VAC and maximum load, shall be greater than 0.5. The source impedance shall be less than 0.1 ohm.



SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN

SCALE 1/1

SHEET 6

OF 24

4.1.3 Range Switching

The power supply shall accept the full input range. No range switching is necessary or possible.

4.1.4 Frequency

The supply shall operate with an input frequency of 47 – 63 Hz AC.

4.1.5 Current

Maximum steady state input current shall be less than 1.7 Amperes RMS at 90 VAC and maximum load.

4.1.6 Input Power Rating

(For reference only.) The supply true input power is less than 80 watts.

4.1.7 Inrush Current

Maximum inrush current, from power-on (with power on at any point on the AC sinewave) and including but not limited to, three line cycles, shall be limited to a 29% margin of the I_{2t} rating of the input fuse and bridge rectifier:

4.1.7.1 Cold Start

Cool the disconnected power supply long enough to ensure that all components are within 3°C of the minimum temperature as specified in Section 5.1. Apply the maximum input voltage in section 4.1.1 to the power supply.

4.1.7.2 Hot Start

Operate the power supply the maximum ambient operating air temperature as specified in Section 5.1 for 15 minutes. Cycle power to the power supply by removing and reconnecting maximum input voltage as specified in Section 4.1.1.

4.1.8 Protection

4.1.8.1 Under Voltage

The power supply shall not be damaged by applying an input voltage below the minimum specified in Section 4.1.1.

4.1.8.2 Catastrophic Failure Protection:

When any single component fails, the power supply will not exhibit any of the following effects:

- a) Startling noise
- b) Flame
- c) Excessive smoke
- d) Charred PCB
- e) Fused PCB conductor
- f) Dielectric breakdown
- g) Chemical leak outside the case



SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN

SCALE 1/1

SHEET 7 OF 24

4.1.8.3 Power Line Transient

The power supply shall operate within specifications with the transients defined in IEC 61000-4-4 and IEC 61000-4-5.

The adapter shall survive and the product in which it is installed shall continue to operate with no component failures during and after repeated applications of the following transients. In the event that an end use product is not available for these tests, the power supply shall be loaded at minimum per the load table.

HP recommends that the signal generator be used with low impedance of 12 Ohms.

TABLE 2 POWER LINE TRANSIENT REQUIREMENTS

Transient Type	Coupling mode	Test level	Phase	Repetition Rate	Acceptance Criteria
Surge immunity (Lightning) 61000-4-5	Differential	± 1.5 KV	0° 90° 180° 270°	10 pulses 10 sec	Operating
	Common	± 2.5 KV			No component damage, Loss of function is allowed but the PSU must be recovery with remote ON-OFF switch
	Common	± 3 KV			
Electrical Fast Transients 61000-4-4	<i>Coupling mode</i>	<i>Test level</i>	<i>Phase</i>	<i>Repetition Rate</i>	<i>Acceptance Criteria</i>
	Differential	± 2 KV	Asynchronous	5kHz repetition	Operating
	Common	± 2 KV			

4.1.8.4 AC Leakage Current:


Class I Equipment (Grounded Equipment)

The total combined leakage current when measure in accordance with IEC 60950-1, 2nd Edition shall not exceed 30 microamperes when tested at 250 VAC, 50 Hz in a normal operating condition.

4.1.8.5 Common Mode Noise:

The common mode noise when measure in accordance with IEC 62684 shall not exceed follow below requirement

- AC Input Voltage: **90Vac/60Hz & 264Vac/50Hz**
- The peak-to-peak voltage measured in the frequency range of 10KHz to 400KHz shall not exceed **150mV peak-to-peak**.
- Test condition following with Full load (per step) by each 10% load

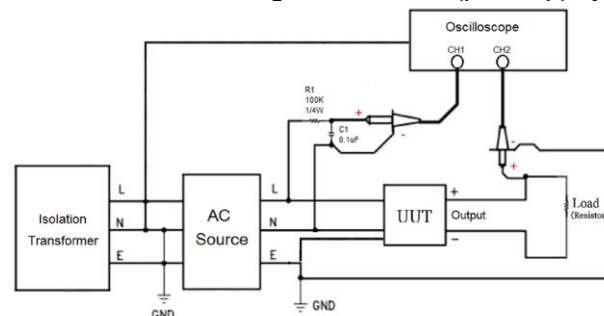

SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN

SCALE 1/1

SHEET 8 OF 24

4.1.8.6 Primary to Secondary Ground:

The power supply shall have a 1 Meg Ohm 1/4W resistor and 0.1uF/100V capacitor parallel combination between earth ground (FG) and secondary DC ground.

4.1.8.7 ISN resistors:

The power supply shall have a 470 Ohm(minimum) resistor between earth ground(FG) and secondary DC ground.

4.1.9 Energy Efficiency

The device shall conform to the EPA Energy Star Requirements Level VI for External Power Supplies:

- The Average Active Mode Efficiency minimum (Calculated but testing at 100%, 75%, 50% and 25% of rated output power and then computing the average of these four values) must be greater than 88% at 115Vac input and 89% at 230Vac input.
- In addition the device must meet the No Load/Light Load requirements as specified below (measured at 115Vac/60Hz and 230Vac/50Hz):

No Load/Light Load	
Output Load	Maximum Input Power
0W	0.21W
0.25W	0.5W
0.5W	1.0W
1.0W	1.7W
1.5W	2.4W

- [Option] In order to fulfill future efficiency requirement, the PSU should have an optional design to meet the No Load requirements as specified below (measured at 115Vac/60Hz and 230Vac/50Hz):

No Load	
Output Load	Maximum Input Power
0W	0.15W

4.2 **OUTPUT**

4.2.1 Voltage

One (1) output shall be provided as defined and measured at the output connector of the supply:

Output Voltage: 19.5V +5.0%/-5%

4.2.2 Current

Min Load 0A
Nom Load 1.7A
Max Load 3.33A
3.49A / 3 minutes
3.7A / 1 minute
3.81A / 30 seconds
Peak Load 5.0A (300ms max)
Peak Load 6.0A (10ms max) – 2.4A peak to 6.0A
3.33A (1min) → 3.2A (2mins) → 3.33A (1min)



SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN

SCALE 1/1

SHEET 9 OF 24

Note: The output voltage will be allowed to drop to 15V minimum during this transient (measured at 100Vac).

4.2.3 Power

The power supply shall be capable of continuously supplying, when installed in the end use system, 65 Watts under all specified conditions.

4.2.4 Adapter Power Rating and ID

The power supply shall provide an "ADAPTER POWER RATING and ID" signal proportional to the output load current and output power rating power of 65 Watts. This signal communicates the AC Adapter power capability/rating and dynamic power draw from the AC Adapter. There shall be provisions to adjust the tolerance of the Power Rating. This signal should provide:

1. A 383 KOhm between the output voltage and the ID pin.
2. A high level current source between 63W to 68W available at the ID pin.
3. At start-up when the output voltage is within its steady-state tolerance and at its rated load, or when the output current reaches 20% above its rated current, the "ADAPTER POWER RATING" signal shall start to become active after a delay of 50ms to 300ms.

4.2.5 Transient Response

(Step Load) The following transient loads are to be applied to the output. The frequency range of the transient loads described shall be from 1 Hz to 5 kHz. The waveform shall be a square wave with the slope of the rise and fall at 1 A/microsecond. The output voltage tolerance shall be allowed $\pm 5\%$ during a step load change of up to 90% of full load including steps increasing from minimum or decreasing from full load. Varnishing or vacuum impregnation is required. Measurements should be made at output cable connector.

4.2.6 Output Regulation

At nominal input line voltage (120Vac), the output shall be subjected to the load described in Section 4.2.2, and shall remain within the regulation limits as defined in Section 4.2.1.

4.2.7 Protection

The power supply shall automatically shut down under the conditions described below.

4.2.8 Over Voltage

The power supply shall provide over voltage protection such that under any single component failure, the output channel shall not exceed 29 volts with a maximum duration of 250 milliseconds.

4.2.9 Over Current

The power supply shall limit the maximum steady state output current to an average current of 11 Amperes.

4.2.10 Short Circuit

The power supply shall be protected such that a short from output to return shall not result in a fire hazard, shock hazard, or damage to the power supply.



SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN

SCALE 1/1

SHEET 10 OF 24

4.2.11 Outputs/Ripple/Noise

Maximum allowable peak-to-peak ripple and noise (as measured at the load with 100VAC input) on the output channel shall be 380mV pk-pk (or 250 mV RMS) ripple within 10 kHz to 20 MHz bandwidth. A resistive load (non-electronic) shall be used for this measurement. The output shall be bypassed to return by 1.0 microfarad ceramic capacitor in parallel with 10 microfarad tantalum capacitor at the point of load. The load cable shall be the specified output cable assembly. The printed wiring board assembly shall be installed in its enclosure for this measurement or have the measurement leads properly shielded and proper earth grounds applied to power supply.

4.2.12 Stability

The power supply shall be unconditionally stable while operating within its normal operating specification.

4.2.13 Overshoot

During power-on or power-off, the output voltage shall be monotonically increasing or decreasing with respect to the overshoot which shall neither exceed 21 volts peak nor be outside the regulation requirements for more than 10 milliseconds (mS).

4.2.14 Power-On Time

Output Regulation: The output shall be in regulation within five (5) seconds after valid input power (90 VAC) has been applied.

4.2.15 Rise Time

Output Voltage: The output shall be in regulation within 40mS at 0 to 500mA condition. (Measured from 10% to 95% regulation)

4.2.16 Hold Up

- The power supply shall maintain voltage regulation within the specified limits in paragraph 4.2.1 for at least 5 milliseconds after loss of input voltage measured at 115 VAC and at maximum load.
- The power supply shall maintain voltage regulation within the specified limits in paragraph 4.2.1 for at least 10 milliseconds after loss of input voltage measured at 115 VAC and at 80% load.

4.2.17 Acoustic Test

The power supply when tested in an anechoic chamber shall not exceed the sound pressure levels per the HP AC Adapter Acoustic Noise Test Specification under all output load and ac input conditions. Acoustic noise measurements shall be conducted in accordance with ISO 7779 (or ECMA-74) and declared in accordance with ISO 9269 (or ECMA-109).

4.2.18 System Capacitive Load

The system load capacitance is 2200uF. Plugging a live AC Adapter into the system capacitance shall not cause the adapter to shut down.



SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN

SCALE 1/1

SHEET 11 OF 24

4.2.19 Thermal Shutdown

The power supply shall incorporate over temperature protection to prevent catastrophic failure from overheating.

5. **ENVIRONMENTAL REQUIREMENTS**

5.1 **TEMPERATURE**

5.1.1 Operating

The supply shall operate from 0 to 35°C. The maximum temperature rise of any surface shall not exceed 45°C when measured at 100 Vac and at maximum load.

5.1.2 Non-Operating

The power supply can be stored from -20 to 85°C.

5.2 **COOLING**

The power supply shall be convection cooled only.

5.3 **HUMIDITY**

The power supply shall withstand without degradation with 95% relative humidity, non-condensing, both operating and non-operating.

5.4 **ALTITUDE**

5.4.1 Operating

The power supply can be operated at 5,000 m above sea level

5.4.2 Non-Operating

50,000 feet above sea level.

5.5 **MECHANICAL SHOCK**

(Power supply inside assembly.)

5.5.1 Operating

10 G, 11 ms, half sine, one shock input in each of three mutually perpendicular axes, for a total of six shock inputs.

5.5.2 Non-Operating

100 G peak, trapezoid, 180 in/s velocity change, one shock input per direction in each of three mutually perpendicular axes, for a total of six shock inputs. 240 G peak, 2 ms, half sine, one shock input in each of three mutually perpendicular axes, for a total of six shock inputs.

5.5.3 UL Safety

36-inch drop onto hardwood surface, after which no safety hazard is encountered regardless of operational capabilities.



SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN

SCALE 1/1

SHEET 12 OF 24

5.5.4 Shipping

42-inch drop, all edges, surfaces — while enclosed in appropriate shipping container.

5.6 **VIBRATION**

(Supply inside assembly.)

5.6.1 Operating

0.75 G zero to peak, 5 to 500 Hz, 0.5 octaves/minute, one cycle, 5 to 500 to 5 Hz per axis in each of three mutually perpendicular axes.

5.6.2 Non-Operating

1.5 G zero to peak, 5 to 500 Hz, 0.5 octaves/minute, one cycle, 5 to 500 to 5 Hz per axis in each of three mutually perpendicular axes.

0.025 G squared/Hz, 10 to 500 Hz, nominal 3.5 G RMS level, one hour per axis, in each of three mutually perpendicular axes for a total duration of three hours.

5.7 **ELECTROSTATIC DISCHARGE (ESD)**

The AC adapter shall withstand ESD test voltage conditions at any point on the enclosure using the test setups and conditions found in Document 131296 and with transients as defined in IEC 61000-4-2. As an infrequently user touchable subassembly, the following test levels shall be used:

- a) ± 15 kV with no abnormal operation, but test to 20kV and report results
- b) ± 15 kV with no damage to power supply, but test to 20kV and report results

The storage capacitance shall be 150 pF and the discharge resistance shall be 330 ohms.

5.8 **ECO ENVIRONMENTAL**

This section defines environmental requirements that are applicable to all products and product components. Individual components specifications may amend or append requirements to this base set as part of their component-specific requirements, but otherwise these requirements are applicable in all cases.

5.8.1 General Requirements

All products, components, and materials shall comply with the latest revision of HP Standard 011-00 General Specification for the Environment (GSE) including all referenced documents throughout the product life cycle.

Access to the public version of GSE is available from the URL.

<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04932490>

5.8.2 Supplemental Environmental Specification

All commodity, component, and part materials shall comply with the HP Standard HX-00025-01 Supplemental Environmental Specification – Commodity and Component (Supplemental Environmental Spec) requirements. Component categories are created to allow different material restriction requirements for each category. The Supplemental Environmental Spec is a supplement to the HP GSE.



SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN

SCALE 1/1

SHEET 13 OF 24

The Supplemental Environmental Spec references the Substances and Materials Future Requirements (HX-00011-01A), Substances and Materials Business-Specified Requirements (HX-00011-01B) and Product Requirements (HX-00011-11) sections of the GSE with technical material and product specifications.

The product shall comply with all requirements in Supplemental Environmental Spec at the time of release, regardless of any future regulatory effective date.

The Supplier shall provide the required data to HP's System Integrator for the completion of the HP Environmental Data Sheet (EDS), HP Recyclability Assessment Tool (RAT), and Disassembly Instructions.

Individual commodity or component specifications may exempt requirements to the Supplemental Environmental Spec as part of component-specific requirements, but otherwise the requirements in Supplemental Environmental Spec are applicable in all instances.

Low Halogen Exemption: Brominated and Chlorinated Flame Retardants; GSE section HX-00011-01B; GSE Id 090807-92, & 080715-34, & 090807-37 AND Antimony; GSE section HX-00011-01B; GSE Id 110727-47 & 110727-63 are not required.

Access to the HP Commodity/Component Spec (HX-00025-01), Substances and Materials Future Requirements (HX-00011-01A), Substances and Materials Business-Specified Requirements (HX-00011-01B), and Product Requirements (HX-00011-11) require access to the HP Supplier Handbook, Restricted Access. Register or sign in from the URL. <https://h20168.www2.hp.com/supplierextranet/index.do>

5.8.3 Other ECO Requirements

5.8.3.1 Energy Requirements

5.8.3.11. Korea e-Standby (Energy Boy) (if applicable)

- System must comply with Korea e-Standby Power Program Regulation on Standby Power Reduction. The detailed requirements can be found in the HP GSE - Product Requirements.
- Please note since this requirement is now mandatory by the HP GSE, it will be deleted in future releases of the product specification

5.8.3.12. Korea EPS-MEPS


- The External power supply must comply with the Korea Mandatory Energy Performance Specification (MEPS). The detailed requirements can be found in the HP GSE - Product Requirements.
- Please note since this requirement is now mandatory by the HP GSE, it will be deleted in future releases of the product specification.

5.8.3.13. Australia and New Zealand EPS Registration

- The External power supply must be registered in Australia and New Zealand. The detailed requirements can be found in the HP GSE - Product Requirements.

5.8.3.2 Accessibility

5.8.3.21. Section 508 Accessibility – US

	SIZE A	DRAWING NO. L25298			REV C
	DRAWN	SCALE 1/1	SHEET 14	OF	24

The system must comply with the section 508 Accessibility – US requirements. Please reference: <http://www.section508.gov/index.cfm?FuseAction=content&ID=12>

5.8.3.3 EU Energy Related Products (formerly EuP)

5.8.3.31. EuP Lot 7 Tier 1

- System must comply with the Energy Using Products (EuP) External Power Supply Energy Specifications. The detailed requirements can be found in the HP GSE - Product Requirements
- Please note since this requirement is now mandatory by the HP GSE, it will be deleted in future releases of the product specification.

5.8.3.32. EuP Lot 7 Tier 2

System must comply with the April 27 2011 limits Tier 2 of the Energy Using Products (EuP) External Power Supply Energy Specifications. The detailed requirements can be found in the HP GSE - Product Requirements.

5.8.3.4 Canada EPS certification and Registration

External power supplies must comply with the Canadian standard CSA-C381.1-08: Test method for calculating the energy efficiency of single-voltage external ac-dc and ac-ac power supplies. The EPS must be certified by an accredited body and registered with the Canadian government by the supplier.

Deliverables:

- A signed report and certificate issued by an ISO/EN 17025 accredited laboratory showing compliance with this requirement.
- Confirmation of registration with the applicable Canadian government agency.

5.8.3.5 Mexico Sustainable Energy Use Law

External power supplies must comply with the Mexico Sustainable Energy Use Law. Products must be tested for OFF mode at 127V/60Hz and labeled with the power consumption as required.

Deliverables:

- A completed and signed HP Mexico Energy Use Law Report issued by the supplier or by an ISO/EN 17025 accredited laboratory showing compliance with this requirement.
- Completed HP Registration Form.

6. AGENCY APPROVALS

This product shall comply with all Regulatory requirements set forth in HPInc Specification 481605.



481605-K.pdf

NOTE: EN60601-1-2 EMC MOOP [Design Compliance]

EN 60601-1-2 consisting of:

⇒ **IEC 61000-4-2** Electrostatic Discharge.....[8kV contact, 15kV air discharge]



SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN

SCALE 1/1

SHEET 15 OF 24

- ⇒ **IEC 61000-4-3** RF Fields.....[10V/m, 80-2700MHz, 1kHz 80%AM modulation Home Healthcare Environment]
- ⇒ **IEC 61000-4-4** Elec. Fast Transients.....[±2kV on AC and DC 5KHz Repetition]
- ⇒ **IEC 61000-4-5** Surge.....[±0.5KV, ±1KV line to line/±0.5KV, ±1KV, ±2KV line to earth on AC power port; ±2KV for outdoor cables]
- ⇒ **IEC 61000-4-6** Conducted RF.....[3V; 0.15-80 MHz; 1kHz 80% AM modulation; 6Vrms in ISM bands (I/O cables < 3m excluded)]
- ⇒ **IEC 61000-4-11** Voltage variations.....[>95% dip,0.5 period; 30% dip, 25 periods;>95% reduction, 250 periods]

7. **RELIABILITY**

LIFE EXPECTANCY: The power supply shall have a field failure rate of less than 0.1% annually within the first three years of operation.

7.1 **DERATING GUIDELINES**

The following component de-rating requirements shall be followed:

- Semiconductor junction temperature shall be less than 130°C.
- Thermal De-rating at normal operation shall be <90%. Thermal measurements will be verified with the power supply mounted in a representative product enclosure. OTP shall not result in any damage and safety or reliability degradation. Need to meet HP Life time requirement is any load, Voltage and ambient temperature.
- Resistor power de-rating will be consistent with the resistor type and application
- Component voltage de-rating shall be < 95% for all continuous conditions.
- Components shall not exceed 100% of their voltage rating during start-up and transients; exception: Bulk Capacitors shall not exceed 110% during transients.
- Component current de-rating shall be <90% for all continuous conditions. Exception: Bulk Capacitors shall not exceed 100% for all continuous conditions. The effects of ripple current heating shall be accounted for in this de-rating.
- All components shall be de-rated to insure meeting the calculated MTBF
- All magnetic devices shall be rated for 130°C minimum
- All capacitors must be rated at 2000 hours or greater at maximum rated temperature, unless otherwise approved by HP. In any load, voltage and temperature, all capacitor must meet HP lifetime define

7.1.1 **E-Caps life time**

- All Aluminum electrolytic capacitors shall have a minimum lifetime of 8,736 hours at ambient temperature of 35degC and 80% load.
- Usage profile 8h x 52 weeks x 3 yrs = 8,736 hours

7.1.2 **E-Caps Charge / discharge cycles**

- If the design presents operational modes where sustained regular repetitive heavy E-cap charge / discharge cycles are used, the supplier has to ensure that the E-caps are suitable for such use and that these charge / discharge cycles are within the components specification limits.



SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN

SCALE 1/1

SHEET 16 OF 24

7.1.3 Critical Components

The critical components list defines components with critical functionality, specifications, attributes, and parameters essential to the proper operation of the power supply and completed system. Once the list is complete for production, any deviation from this list requires documented completion of an agreed upon test plan. Final approval requires written HP acknowledgment. Due to the critical nature of these components, any deviation from the agreed upon BOM/AVL will jeopardize the stability, robustness and/or operation of the board. The timeframe for AVL proposals and finalization is described in the appropriate Statement of Work and schedule milestones. Specific application criteria for critical components are defined in Table 3.

TABLE 3
EPS CRITICAL COMPONENTS CRITERIA

Part Description	Application	Notes
Bridge Diodes	AC rectification	800V breakdown voltage minimum
Capacitors	Frequency and loop compensation	X7R dielectric or better
Capacitors	High voltage primary snubber circuits	Y5S or better
Capacitors	LLC resonant capacitor	PP (polypropylene) material or better
Capacitors(Plastic CAP)	PFC and LLC circuit	MPP or MPE is recommended. The PE type is restricted.
Bulk capacitor	Dc-bus	Active PFC, Boost, Fly-back topologies bulk cap rating need to apply both 400Vdc / 105degC and 420Vdc / 105degC minimum.
Resistor	Primary side	High voltage type is preferred - SMD 0805 is restricted - "Thin film" and "Carbon" type are restricted
FET	DC to DC main switching, active PFC and stby circuit FET	FETs should be rated at least - 600V Active PFC MosFET - 600V PWM MosFET for Fly-back topologies - 600V MosFET for LLC topologies
By-path diode	Active PFC or Boost converter	Active PFC designs shall have a so called By-path diode in parallel to the Boost choke and output rectifier.
AC-Inrush current limiting devices	Active PFC or Boost converter	Active PFC designs shall not have an AC-Inrush current limiting device (ex: NTC) in the By-path circuit.
MOV (Metal Oxide Varistors)	EMI-filter, DC bus	If the usage of MOVs can't be avoided their voltage rating has to be greater 385Vrms



SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN

SCALE 1/1

SHEET 17 OF 24


Part Description	Application	Notes
Magnetics	Main transformer and output coupled inductor	The turns ratio of the output coupled inductor must be matched to the main transformer windings
Magnetics	Inductors – powdered iron	Micrometals and Curie and Formosa Shing GA, TAF-200 are the only approved powdered iron cores
Adhesive	Component anchoring	Must be Electronics Grade and meet UL94V-0
Glue	Component anchoring	AB Glue is not allowed (fix component, thermal glue...)
Red Phosphorus	Material	Red Phosphorus must not be used as flame retardant in any part of the power supply especially AC inlet and DC cable / plug.
AC fly leads / wire	AC socket	Must to use fly leads / wire to solder AC inlet to PCB.
PCB	PCB board	Low Halogen

8. INTERCONNECTION

The output cable shall meet the electrical and MTBF requirements of this specification and comply with the HP DC Cable Critical Parameter Specification. The cable shall be UL wire style UL 20276. The cable shall include a staked Velcro strap. The connector shall be equivalent to FOXCONN JPD0038-506 and pin out as shown in Figure 1.

FIGURE 1 OUTPUT CABLE

OUTPUT CABLE



PIN #	SIGNAL NAME
1	OUTSIDE -
2	ID PIN
3	INSIDE +



SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN

SCALE 1/1

SHEET 18 OF 24







Technical drawing of the cable assembly showing dimensions and a label:

- Dimension 1: $100.0^{+20.0}_{-0.00}$
- Dimension 2: 100.0 ± 20
- Dimension 3: 80.0 ± 10
- Label: VELCRO (pointing to the central connector area)

- a) HPInc
- b) Series Number
- c) HPInc Part Number/Spares Part Number
- d) Date Code
- e) All Required AGENCY MARKINGS (See Section 6.1)
- f) Country of Manufacture
- g) Electrical Rating: Output rating, Input rating in Volts, Amps, Hertz.
- h) Commodity Tracking Label.



SHEET 19 OF 24

Adapter supplier	Label drawing
AcBel (-014)	 AcBel Hera+ 65W label drawing.pdf
Chicony	 Chicony Hera+ 65W label drawing.pdf
Delta	 Delta Hera+ 65W label drawing.pdf
Lite-On	 Lite-On Hera+ 65W label drawing.pdf

10. **MECHANICAL**

10.1 **DIMENSIONS**

The nominal external dimensions of the power supply should not exceed 90 mm X 51 mm X 28.5 mm. See Figure 2.

10.2 **MATERIAL**

The enclosure material should be able to withstand the tests of Section 5.0 and conform to Document 100339.


10.3 **COLOR**

Color shall conform to Document 114047.

10.4 **EXTURE**

- Texture shall conform to VDI-27 Specification.
 - Ra spec: 2.1µm~2.4µm
 - Draft Angle(PC): 2degree Maximum

FIGURE 2 ADAPTER HOUSING

	SIZE A	DRAWING NO. L25298			REV C
	DRAWN	SCALE 1/1	SHEET 20	OF	24



0.625 ± 0.005 (B)

0.156 ± 0.005 (C)

2.9 ± 0.1 (A)

1/2-12 UNF-2A x 3.00

ND.	PLUG
A	OUTSIDE -
B	ID PIN
C	INSIDE +

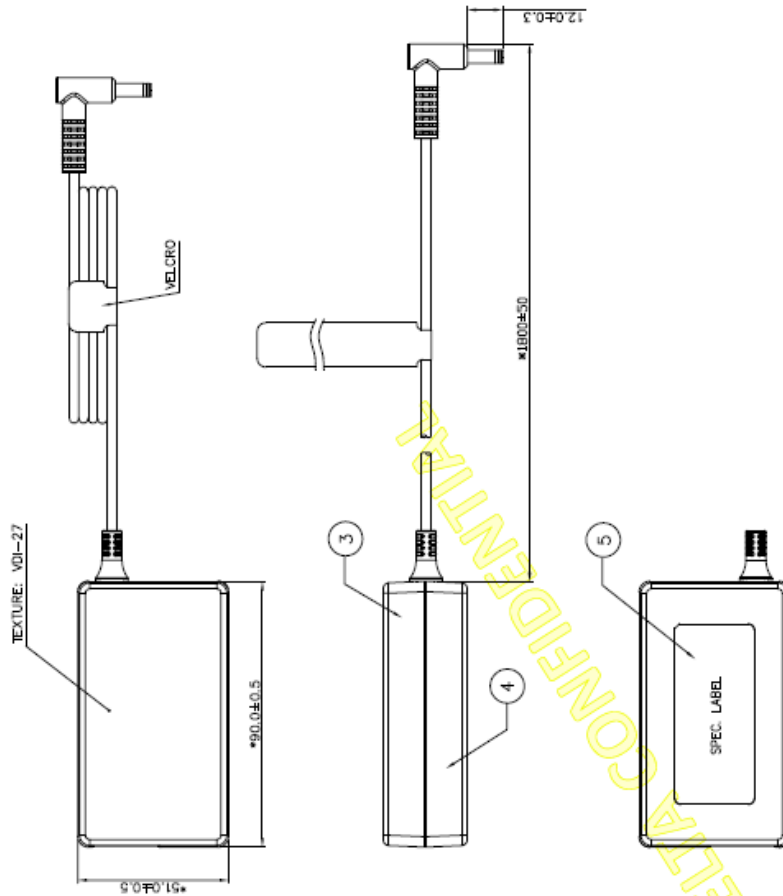



ITEM	PART NAME	REMARK
①	POWER CORD	BLACK
②	SOCKET	BLACK
③	COVER	BLACK
④	CHASSIS	BLACK
⑤	WIRE	BLACK

4. MARKED * MARK MUST BE INSPECTED AND CONTROLLED STRICTLY BY QA.


 台達電子工業股份有限公司 DELTA ELECTRONICS, INC.	Drawn: Jerry Juang 03/27/18	Design: Jerry Juang 03/27/18	Date: Jerry Juang 03/27/18
	Description:  PHYSICAL DIMENSION		
THIS DRAWING AND INFORMATION ARE THE PROPERTY OF DELTA ELECTRONICS, INC. ALL RIGHTS ARE RESERVED.	Part No. ADP-65A/E BA	REV. 00	SIZE
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONS DECIMALS MILLIMETERS 1/16 1/32 1/64 0.004 0.005 0.007 0.010 0.015 0.020 0.030 0.050 0.075 0.100 0.150 0.250 0.500 1.000 1.500 2.000 3.000 4.000 5.000 6.000 8.000 10.000 12.000 15.000 20.000 25.000 30.000 40.000 50.000 60.000 70.000 80.000 90.000 100.000 125.000 160.000 200.000 250.000 315.000 400.000 500.000 630.000 800.000 1000.000 1250.000 1600.000 2000.000 2500.000 3150.000 4000.000 5000.000 6300.000 8000.000 10000.000 12500.000 16000.000 20000.000 25000.000 31500.000 40000.000 50000.000 63000.000 80000.000 100000.000 125000.000 160000.000 200000.000 250000.000 315000.000 400000.000 500000.000 630000.000 800000.000 1000000.000 1250000.000 1600000.000 2000000.000 2500000.000 3150000.000 4000000.000 5000000.000 6300000.000 8000000.000 10000000.000 12500000.000 16000000.000 20000000.000 25000000.000 31500000.000 40000000.000 50000000.000 63000000.000 80000000.000 100000000.000 125000000.000 160000000.000 200000000.000 250000000.000 315000000.000 400000000.000 500000000.000 630000000.000 800000000.000 1000000000.000 1250000000.000 1600000000.000 2000000000.000 2500000000.000 3150000000.000 4000000000.000 5000000000.000 6300000000.000 8000000000.000 10000000000.000 12500000000.000 16000000000.000 20000000000.000 25000000000.000 31500000000.000 40000000000.000 50000000000.000 63000000000.000 80000000000.000 100000000000.000 125000000000.000 160000000000.000 200000000000.000 250000000000.000 315000000000.000 400000000000.000 500000000000.000 630000000000.000 800000000000.000 1000000000000.000 1250000000000.000 1600000000000.000 2000000000000.000 2500000000000.000 3150000000000.000 4000000000000.000 5000000000000.000 6300000000000.000 8000000000000.000 10000000000000.000 12500000000000.000 16000000000000.000 20000000000000.000 25000000000000.000 31500000000000.000 40000000000000.000 50000000000000.000 63000000000000.000 80000000000000.000 100000000000000.000 125000000000000.000 160000000000000.000 200000000000000.000 250000000000000.000 315000000000000.000 400000000000000.000 500000000000000.000 630000000000000.000 800000000000000.000 1000000000000000.000 1250000000000000.000 1600000000000000.000 2000000000000000.000 2500000000000000.000 3150000000000000.000 4000000000000000.000 5000000000000000.000 6300000000000000.000 8000000000000000.000 10000000000000000.000 12500000000000000.000 16000000000000000.000 20000000000000000.000 25000000000000000.000 31500000000000000.000 40000000000000000.000 50000000000000000.000 63000000000000000.000 80000000000000000.000 100000000000000000.000 125000000000000000.000 160000000000000000.000 200000000000000000.000 250000000000000000.000 315000000000000000.000 400000000000000000.000 500000000000000000.000 630000000000000000.000 800000000000000000.000 1000000000000000000.000 1250000000000000000.000 1600000000000000000.000 2000000000000000000.000 2500000000000000000.000 3150000000000000000.000 4000000000000000000.000 5000000000000000000.000 6300000000000000000.000 8000000000000000000.000 10000000000000000000.000 12500000000000000000.000 16000000000000000000.000 20000000000000000000.000 25000000000000000000.000 31500000000000000000.000 40000000000000000000.000 50000000000000000000.000 63000000000000000000.000 80000000000000000000.000 100000000000000000000.000 125000000000000000000.000 160000000000000000000.000 200000000000000000000.000 250000000000000000000.000 315000000000000000000.000 400000000000000000000.000 500000000000000000000.000 630000000000000000000.000 800000000000000000000.000 1000000000000000000000.000 1250000000000000000000.000 1600000000000000000000.000 2000000000000000000000.000 2500000000000000000000.000 3150000000000000000000.000 4000000000000000000000.000 5000000000000000000000.000 6300000000000000000000.000 8000000000000000000000.000 10000000000000000000000.000			

OUTSIDE DRAWING

UP/N:A065R157P

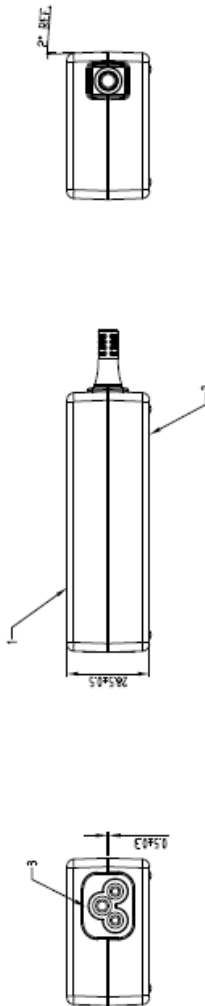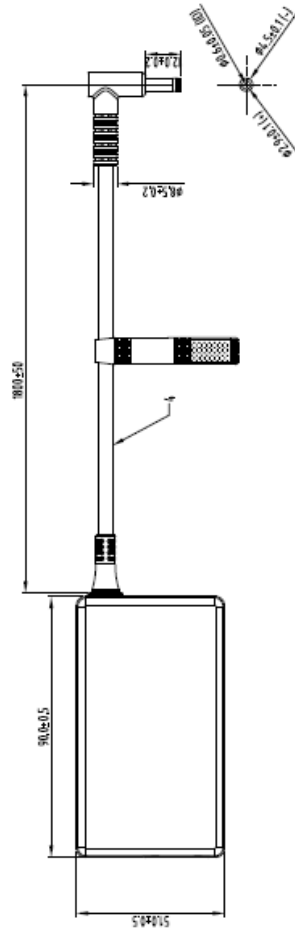

ITEM	NAME	QTY	DESCRIPTION
1	TOP CASE	1	Material: PC, Heat Y-A Flammability, Color: Black, Thickness: 0.27
2	BOTTOM CASE	1	Material: PC, Heat Y-A Flammability, Color: Black, Thickness: 0.27
3	PC MET	1	IS TYPE: COLOR: Black
4	PC CABLE	1	UL 20278 SHIELD CABLE: 10m

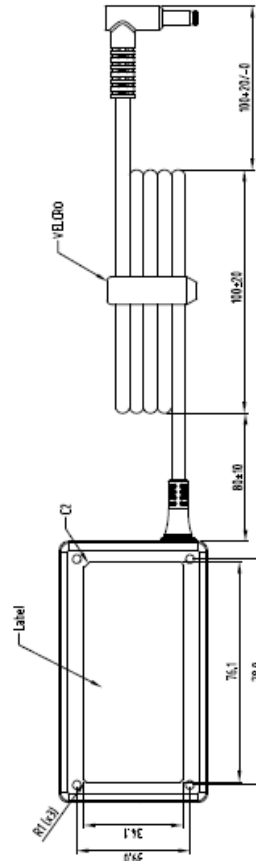

REV	DATE	DESCRIPTION
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
51		
52		
53		
54		
55		
56		
57		
58		
59		
60		
61		
62		
63		
64		
65		
66		
67		
68		
69		
70		
71		
72		
73		
74		
75		
76		
77		
78		
79		
80		
81		
82		
83		
84		
85		
86		
87		
88		
89		
90		
91		
92		
93		
94		
95		
96		
97		
98		
99		
100		

REV	DATE	DESCRIPTION
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
51		
52		
53		
54		
55		
56		
57		
58		
59		
60		
61		
62		
63		
64		
65		
66		
67		
68		
69		
70		
71		
72		
73		
74		
75		
76		
77		
78		
79		
80		
81		
82		
83		
84		
85		
86		
87		
88		
89		
90		
91		
92		
93		
94		
95		
96		
97		
98		
99		
100		

Chicony



SIZE
A

DRAWING NO.

L25298

REV
C

DRAWN


SCALE 1/1

SHEET

22






OF

24




B. 需通過高壓測試。

ENG.	APPR
------	------


		ACBEL POLYTECH INC.	
MODEL NO. ADH032-020G		DWG. NO. : MO-ADH032-020G_C	
PART NO. MO-ADH032-020G		TITLE	
		MESH. OUTLINE FOR ADH032-020G	
THIRD ANGLE PROJECTION		DESIGNER Kevin	
		DATE 06/15/18	
Metric		SAFETY	
			

Lite-On


- NOTES: UNLESS OTHERWISE SPECIFIED,
1. ALL DIMENSIONS ARE IN MM.
TOLERANCES TO BE ± 0.5 MM.
 2. PARTS SPECIFIED AS FOLLOWS:
2-1. ENCLOSURE:
* MEET MIN. V-0 FLAMMABILITY.
* COLOR: BLACK
* TEXTURE: VJI-30
2-2. AC INLET:
* IEC 320, C6 CERTIFIED, 3 PINS,
* COLOR: BLACK PER MAKER.
2-3. DC OUTPUT:
* PLUG: REFERENCE DC CORD DRAWING

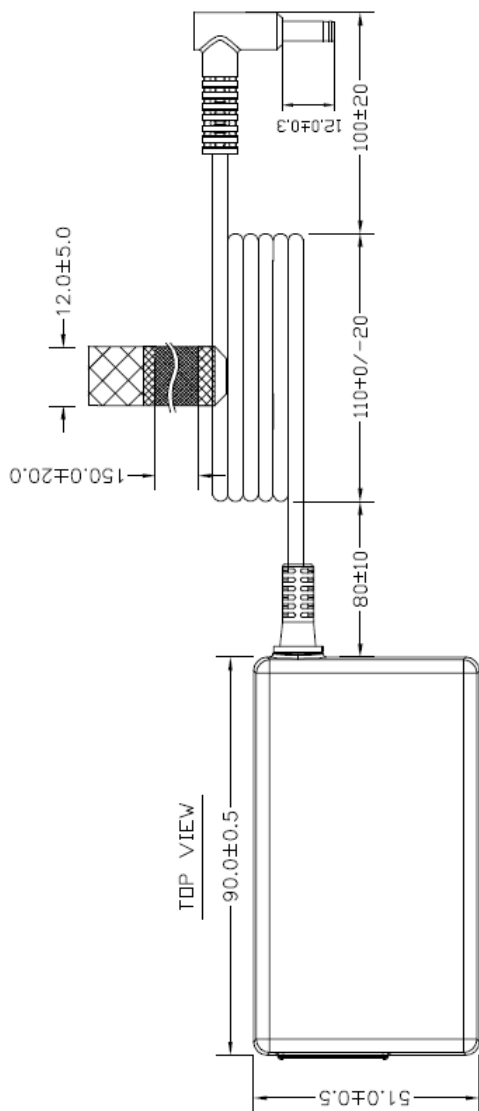

FRONT VIEW

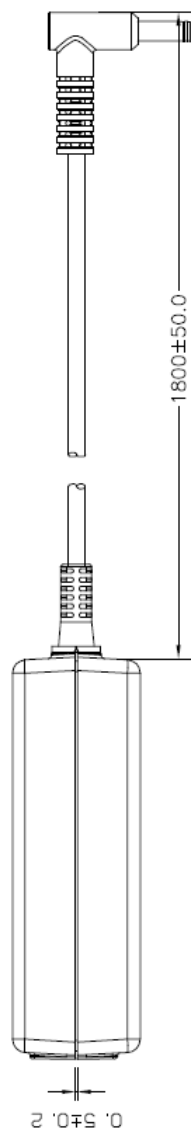

BOTTOM VIEW

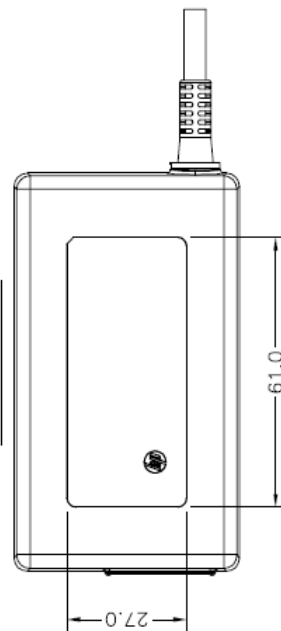

LEFT VIEW

