


Stock Tesla BMB connector — cavity / continuity worksheet

Molex 15-97-5101 • 10 cavities, 2 × 5 • opposite faces are horizontal mirrors


VIEW A — REFERENCE FACE

row order from the project wiring drawing

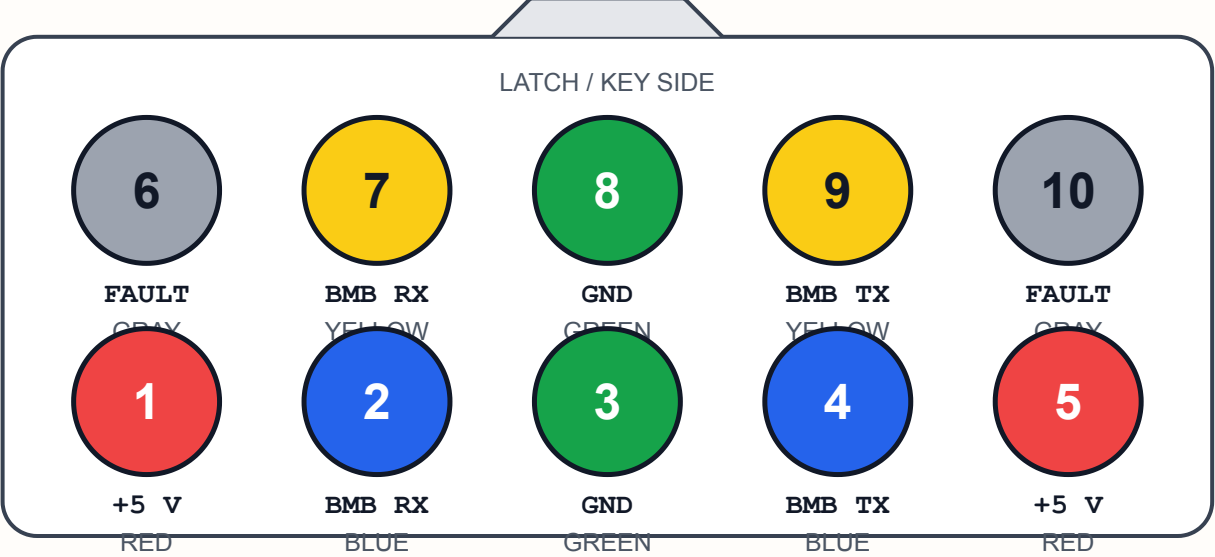

VIEW B — OPPOSITE FACE

horizontal mirror of View A (wire side vs mating side)

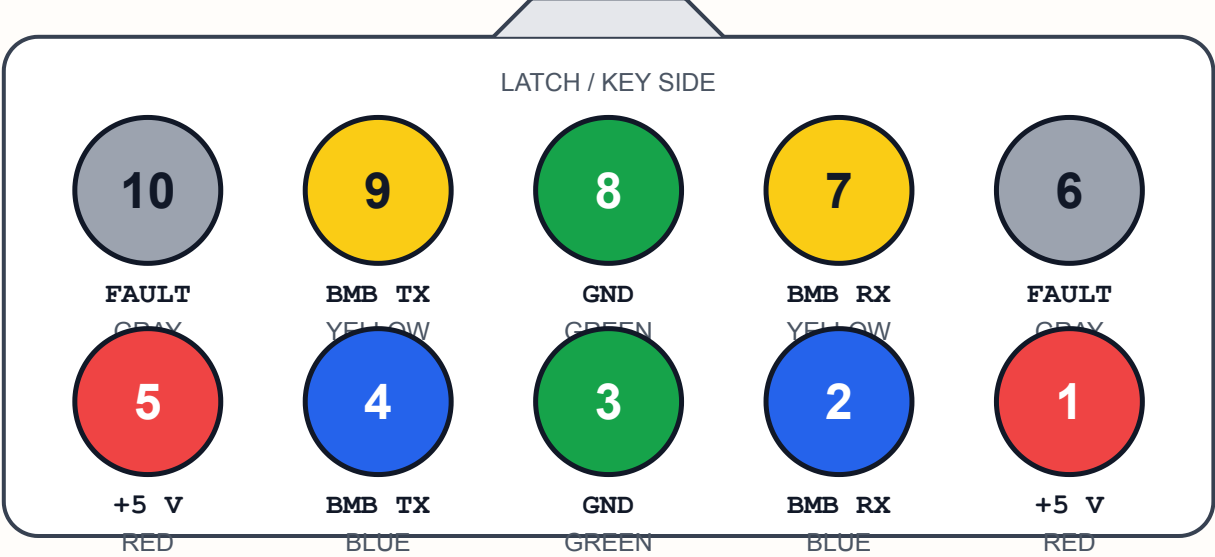

ORIENTATION CHECK — DO NOT PICK A VIEW FROM THE LATCH ALONE

Find a molded cavity ID (ideally 1, 5, 6, or 10) on your actual housing. Use the view that places that ID at the same corner.

The molded ID is authoritative. The public TeslaBMS wiring drawing gives row numbers, but does not label its physical viewing face.

SAFE CONTINUITY PROCEDURE

- Remove Due USB, +5 V, charger, load, and every external connection.
- Confirm 0 V on the pigtail wires before selecting continuity mode.
- Unplug the 10-pin communications pigtail from the BMB if accessible.
Leave the BMB cell-sense connections alone; do not disturb their order.
- Touch one fine probe to one female terminal; touch the other to cut wires.
- Label the one wire that beeps P1...P10. Avoid bridging adjacent terminals.
- Recheck every label from the opposite end before making any splice.

CONTINUITY RECORD

PIN	FUNCTION	FACTORY	WIRE LABEL	✓
1 + 5	+5 V	RED	_____	☐
3 + 8	GND	GREEN	_____	☐
2 + 7	BMB RX	BLUE / YELLOW	_____	☐
4 + 9	BMB TX	BLUE / YELLOW	_____	☐
6, 10	FAULT	GRAY; separate	_____	☐

If the connector remains plugged into the BMB, internal paths may create extra or weak beeps. Do not infer a cavity number from resistance alone.