

EXPERIMENT NO: 14

EMBEDDED C PROGRAM TO DISPLAY “HELLO WORLD” MESSAGE

AIM:

To write an Embedded C program to display “**HELLO WORLD**” message using Keil software.

SOFTWARE REQUIRED:


- Keil software.

PROGRAM:

```
#include <reg51.h>
#include <stdio.h>
void main(void)
{
    SCON = 0x50;  /* SCON: mode 1, 8-bit UART,
enable receiver */
    TMOD = 0x20;  /* Timer 1, mode 2, 8-bit reload */
    TH1 = 0xFD;   /* TH1: reload value for 9600 baud
rate */
    TR1 = 1;      /* TR1: Timer 1 run */
    TI = 1;       /* TI: set TI to send first character */

    while (1)
    {
        printf("Hello World ! \n");
    }
}
```

OUTPUT:

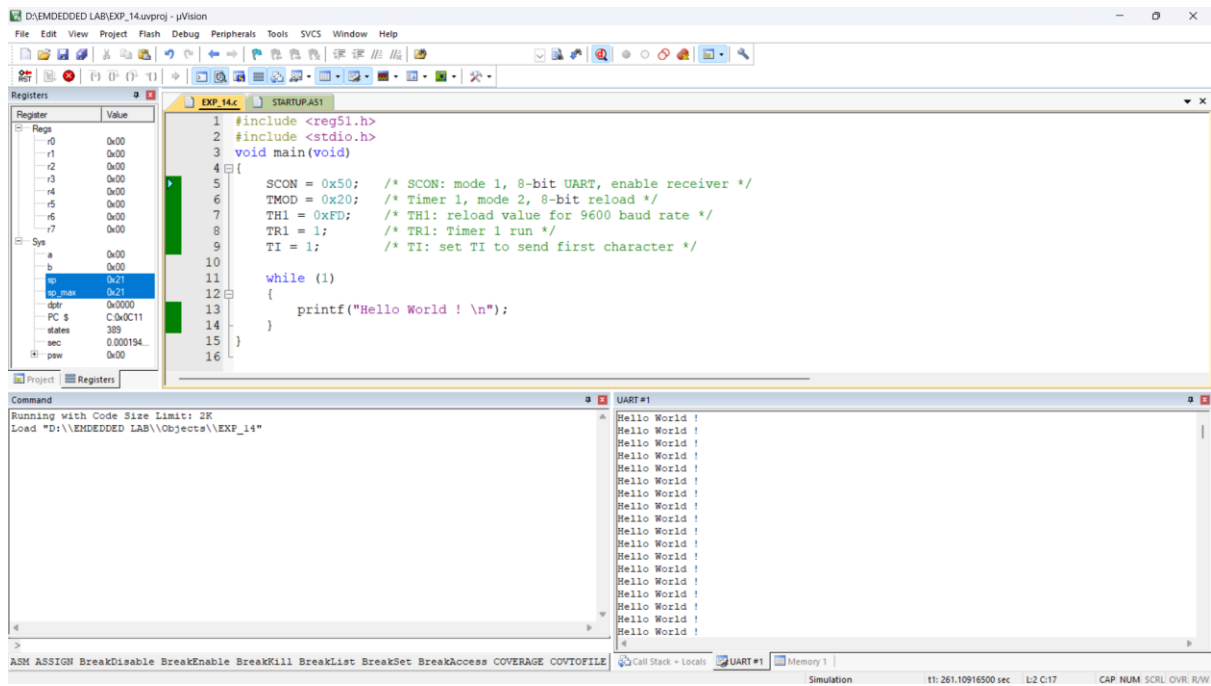

RESULT:

Thus the program has been successfully verified and executed.