



HCVR-3 - CONVENTIONAL RELEASING FIRE ALARM CONTROL PANEL



DESCRIPTION

The HCVR-3 is a 3 zone conventional releasing fire alarm control panel that is UL Listed and FM Approved for releasing.

The HCVR-3 can be configured to activate releasing by a single zone or combination of any two zones. The LCD display is used to show the countdown timer during activation of the releasing sequence.

The HCVR-3 is fully programmable using simple menu options. The panel is a single board construction which provides an easy replacement solution. It is also compatible with a wide range of devices.

STANDARD FEATURES

- UL 864 Listed and FM Approved
- Three detection zones
- Any single zone or any combination of zones can be configured to release
- Fully programmable using simple menu options
- Simple, single board construction
- Installer friendly
- Compatible with wide range of detection devices
- Configurable first stage NAC delays
- Configurable detection delays
- Built-in Manual Release switch and separate circuit
- Compatible with FirePro Xtinguish™
- Compatible with various releasing valves
- Configurable releasing delays up to 60 seconds in 5 second intervals
- Configurable releasing duration up to 5 minutes in 5 second intervals
- Releasing countdown timer displayed on the LCD
- Supports up to seven HCVR-SDU or HCVR-AB
- Built-in relays for Fire, Trouble, Stage 1, Stage 2, Extract and Local Fire

PRODUCT LISTINGS

SIGNALING



California State
Fire Marshal
7165-0410:0206

Specifications subject to change without notice.

Continued on back.

Hochiki America Corporation
7051 Village Drive, Suite 100, Buena Park, CA 90621-2268
Phone: 714-522-2246 Fax: 714-522-2268
Technical Support: 800-845-6692 or technicalsupport@hochiki.com



Find latest revision at www.hochiki.com

F0154 11/2018



HCVR-3 - CONVENTIONAL RELEASING FIRE ALARM CONTROL PANEL

SPECIFICATIONS

Supply Voltage	115VAC (50hz/60hz) or 230VAC (50hz/60hz)
Power Supply DC Rating	24V 3 Amps
Mains Supply Fuse	1.6 Amps 250V
Dimensions	14.5" (W) x 12.2" (H) x 3.5" (D)
Weight	12.3 lbs. w/o batteries
Color	Red or gray
Material	1.2mm mild steel
Max. Battery Size	7Ah 12V (2 per panel)
RS-485 Serial Bus	Maximum line impedance 120 Ohms
Trouble Contact Rating	30VDC 1 Amp
Local Fire Contact Rating	30VDC 1 Amp
Fire Contact Rating	30VDC 1 Amp
1st Stage Contact Rating	30VDC 1 Amp
2nd Stage Contact Rating	30VDC 1 Amp
EXTRACT Output	30VDC 1 Amp contacts for (NO) and (C)
EXISTING Output Rating	18 to 28VDC 1 Amp max load for 5 minutes and voltage reversing DC
NAC Output Rating	0.5 Amp per output
Detection Zone End of line resistor	6K8 Ohms 5% resistor
NAC Output	10K Ohms 5% resistor
Stand by Current	86 mA
Alarm Current	620 mA
Operating Humidity	95% RH Non-Condensing
Operating Temperature	-5°C to +40°C (23°F to 104°F)

HOCHIKI AMERICA COMPATIBLE DEVICES

MODEL	DESCRIPTION	MAX
PANEL ACCESSORIES		
HCVR-SDU	Remote Status Display Unit	7
HSVR-AB	Ancillary Board	7
HCVR-SQA	Sequential Activator	20
HCVR-DS	Disconnect Switch	1
DETECTORS		
SLR-24H	Photoelectric Smoke Detector w/heat	20 per zone
SLR-835	Photoelectric 8-35V Smoke Detector	20 per zone
SLR-835/-835W	Photoelectric 8-35V Smoke Detector	20 per zone
SLR-835-BH-2W	Photoelectric 8-35V Smoke Detector w/heat	20 per zone
SLV-24V/-24/-24N	Photoelectric Smoke Detector	20 per zone
SOC-24V / SOC-24VN	Photoelectric Smoke Detector	20 per zone
SIJ-24	Ionization Smoke Detector	20 per zone
DCD-135	135° Fixed Temperature Rate of Rise Heat Detector	20 per zone
DCD-190	190° Fixed Temperature Rate of Rise Heat Detector	20 per zone
BASES		
NS6-220	6" base, 93mA draw, 24V	20
NS4-220	4" base, 93mA draw, 24V	20
PULL STATION/ABORT SWITCH		
HPS-SAK/HPS-DAH/HPS-SAH/HPS-DAK	Conventional Manual Pull Station for Fire Suppression Release	Unlimited
HCVR-AS	Abort Switch	Unlimited
RELEASING VALVES		
HV2185328	ASCO Solenoid	1
8210G207	ASCO Solenoid	1
11601	Viking Solenoid	1
11602	Viking Solenoid	1
11592	Viking Solenoid	1
11591	Viking Solenoid	1
11596	Viking Solenoid	1
11595	Viking Solenoid	1
2823A-2NB-A4F6	Snap-tite Solenoid	1
EA45 (510006)	Sevo Systems Solenoid	1
K-45-8017	Kidde Solenoid (equivalent to 486500-01)	1
B6793-859	Kidde Solenoid (equivalent to 81-100000-001)	1
753-E Series	Victaulic Solenoid	1
305350 Ci IS8B	Fire Eater Solenoid	1
305451 Ci IS8B	Fire Eater Solenoid	1

HCVR-AS - ABORT SWITCH



STANDARD FEATURES

- UL Listed and FM Approved
- Capable of aborting releasing operation
- Available in red or gray
- Includes a back box for surface mount

DESCRIPTION

The HCVR-AS is a single action push button abort switch. The HCVR-AS is compatible with the HCVR-3 fire alarm control panel and connects via terminal block connections.

SPECIFICATIONS

Models	HCVR-AS-R (red)
	HCVR-AS-G (gray)
Switch Rating	1A @ 30VDC
Dimensions	3.81" W x 3.81" H x 2.32" D

PRODUCT LISTINGS



California State
Fire Marshal
7300-0410:0207

Specifications subject to change without notice.

HCVR-DS - DISCONNECT SWITCH



STANDARD FEATURES

- UL Listed and FM Approved
- Physical switch provides NFPA-compliant disconnect solution for releasing service
- Includes a back box for surface mount

DESCRIPTION

HCVR-DS is a disconnect switch used to disable a releasing circuit for system testing or maintenance.

HCVR-DS is compatible with the HCVR-3 Conventional Releasing Fire Alarm Control Panel.

Models	HCVR-DS-R (red)
	HCVR-DS-G (gray)
Switch Rating	1A @ 30VDC
Dimensions	3.81" W x 3.81" H x 2.32" D

SPECIFICATIONS

PRODUCT LISTINGS			
			California State Fire Marshal 7300-0410:0207

Specifications subject to change without notice.

HPS-DAK-SR

Manual Pull Station for Fire Suppression Release




SPECIFICATIONS	
Model	HPS-DAK-SR
Contact	(1) Form A
Contact Rating	10A @ 120 VAC
Operating Temperature	-30°F (-35 °C) ~ 150°F (66°C)

STANDARD FEATURES

- Metal Construction
- Enclosed switch with glass rod (included)
- UL, CSFM Listed
- Made in USA

ELECTRICAL WIRING

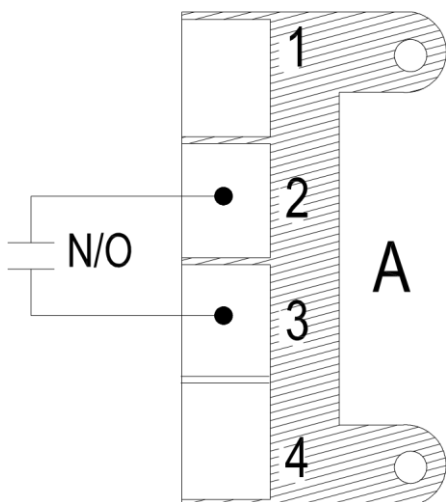

DESCRIPTION

HPS-DAK-SR is a dual action (lift & pull) fire suppression release manual pull station. HPS-DAK-SR model is constructed of a solid die cast housing and comes in glossy red. The back switch plate is plated steel. The electrical switch is rated for 10 Amps @ 120 VAC normally open contact rating. All models are connected via terminal block connections.

PRODUCT LISTINGS



California
State Fire
Marshal

7150-0410:162

Hochiki America Corporation

7051 Village Drive, Suite 100 Buena Park, CA 90621-2268

Phone: 714/522-2246 Fax: 714/522-2268

Technical Support: 800/845-6692 or technicalsupport@hochiki.com



Find latest revision at www.hochiki.com



F0127 03/2012

Wiring Diagram: HCVR-DC-x Manual Extinguishant Disablement Switch


Connections for all HCVR-DS-x models

The operation of this product is intended for indoor use only.

The wiring diagram below illustrates connections for all HCVR-DS-x models of the manual Extinguishant Disablement Switch:

Wiring Diagram 1-1

HCVR-DS Disablement Switch Connections

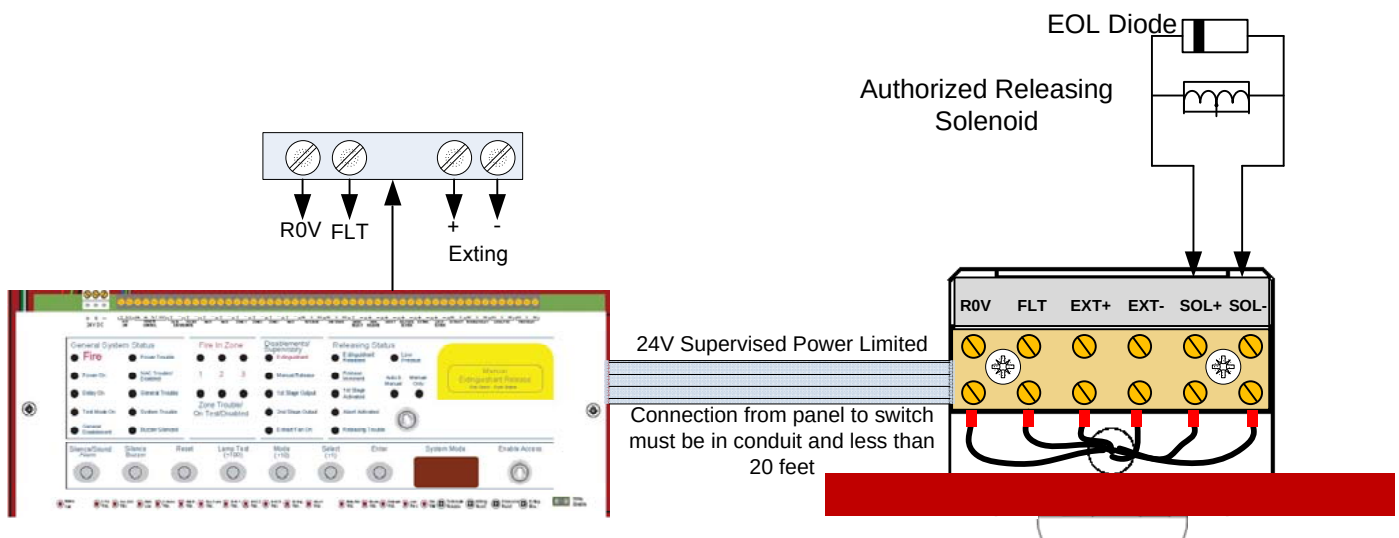

Reference the following documentation for installing, operating and configuring this device with the HCVR-3 Releasing Fire Control Panel:

- *Installation and Operation Manual of the HCVR-3 Releasing Fire Control Panel, HA-06-294,*
- *Wiring Diagram of the HCVR-AB Ancillary Board, HA-03-394*
- *Wiring Diagram of the HCVR-AS Abort Switch, HA-03-395,*

If You Need Help

If you need technical support contact Hochiki America at (800) 845 - 6692 or e-mail technicalsupport@hochiki.com. Technical support is available Monday through Friday, 7:00 AM to 5:00 PM, Pacific Standard Time.

