



REALISTIC EXTERNAL FRONT VIEW

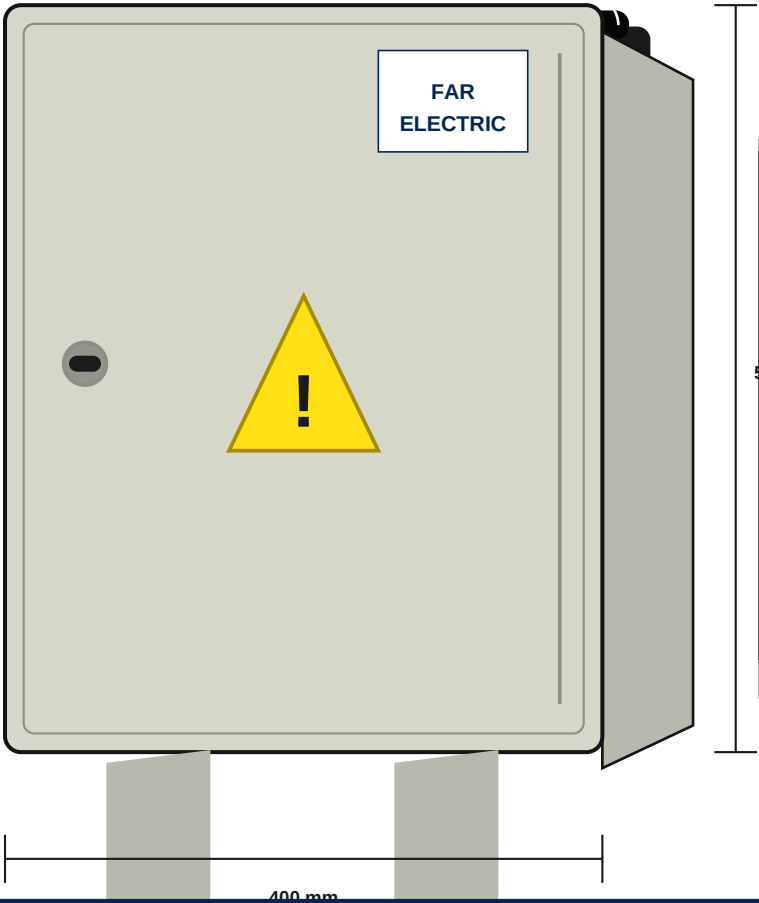


CEE SOCKET DISTRIBUTION - SPLIT ON BOTH SIDES

LEFT SIDE

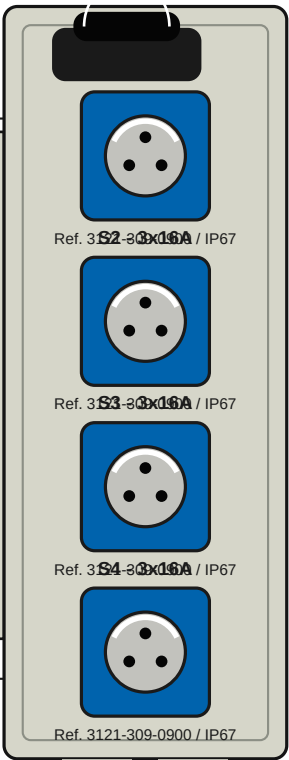

RIGHT SIDE

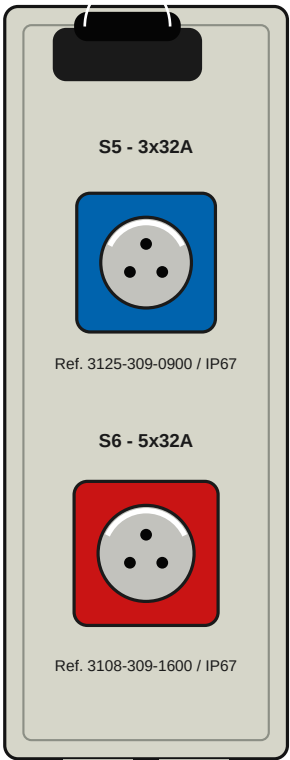


Socket arrangement required: 1 pc x 3x32A + 1 pc x 5x32A.
All socket cut-outs, fixing holes and references to be confirmed by supplier before production.


ACCURATE COMPONENT SCHEDULE

Qty	Description	Model / Ref.	Rating	Location
1	Empty enclosure	HJXF504020Q	500x400x200 mm / IP54	Main body
1	Main RCCB	HDB3VR4635C	63A / 4P / 30mA	Inside
4	MCB 1P	HDB3WN1C16	16A / C / 6kA	Inside
1	MCB 1P	HDB3WN1C25	25A / C / 6kA	Inside
1	MCB 3P	HDB3WN3C32	32A / C / 6kA	Inside
4	Panel socket	3121-309-0900	3x16A / IP67	Left side
1	Panel socket	3125-309-0900	3x32A / IP67	Right side
1	Panel socket	3108-309-1600	5x32A / IP67	Right side
1	External top handle	DS handle / supplier ref.	Heavy duty	Top mounted
1	DIN rail, N/PE bars, labels	Supplier datasheet	As required	Inside

INTERNAL COMPONENT LAYOUT - HIMEL BREAKERS

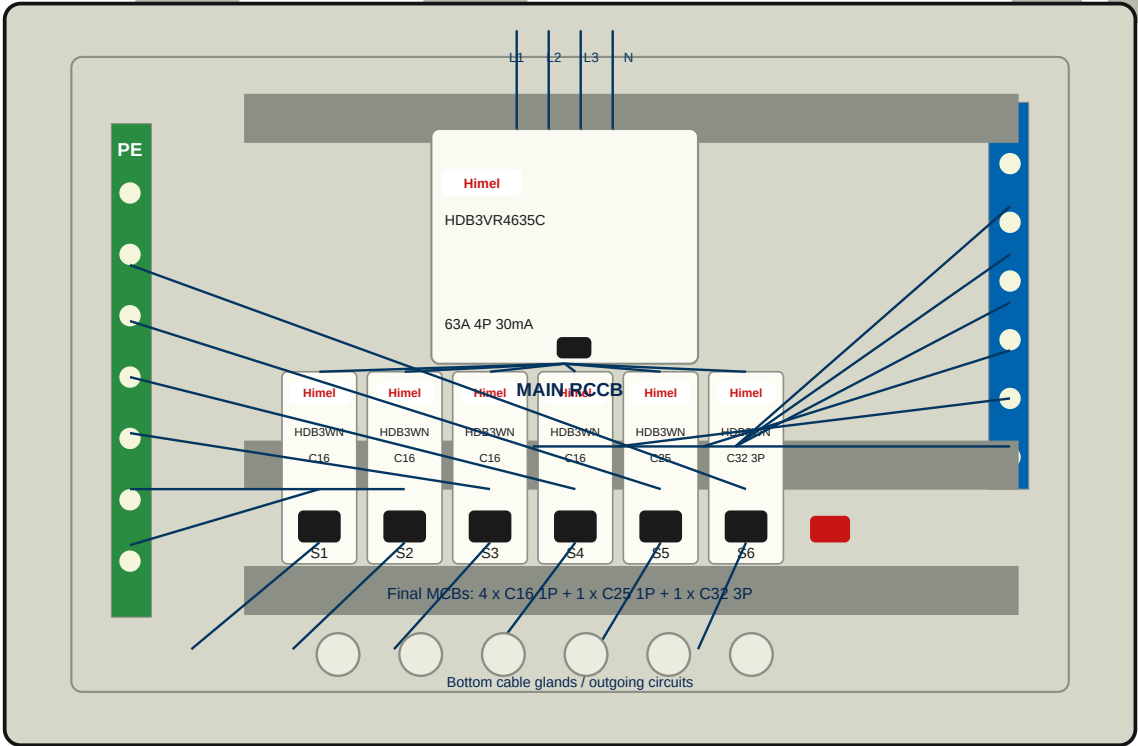

SINGLE LINE DIAGRAM

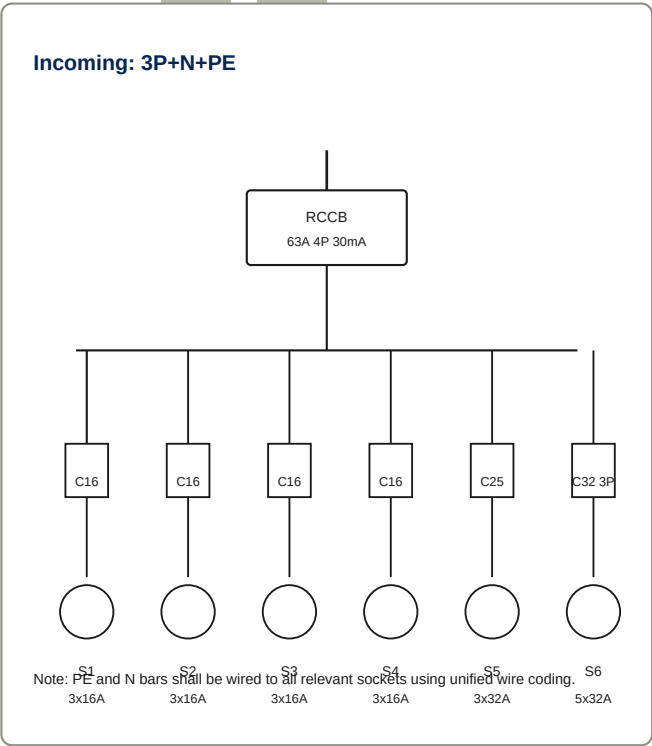

NOTES FOR SUPPLIER APPROVAL

- Brand name on the front label shall be FAR ELECTRIC, with clean corporate face and readable mark.
- Keep the same external cabinet appearance: metal enclosure, visible top handle, floor stand and side-mounted industrial sockets.
- Socket split: left side has 4 pcs 3x16A sockets. Right side has 1 pc 3x32A socket and 1 pc 5x32A socket.
- All sockets to be TP Electric references listed above, IP67.
- Internal protection devices to be Himel only with the exact references and quantities shown in the schedule.
- Use DIN rail, wire ducts, PE bar, N bar, cable ferrules and circuit labels S1-S6.
- Supplier must confirm final cut-out dimensions, fixing holes and internal clearances before mass production.
- High-quality copper wires shall be used in 6 mm², 10 mm² and 16 mm² sizes to ensure safe, reliable and premium-quality connections.
- Enclosure dimensions shown as 500(H) x 400(W) x 200(D) mm, based on model HJXF504020Q.