


Product information—15/25kV Four-position Loadbreak Switch (T Blade)

◆ General


The four-position loadbreak switch is used in underground residential applications with loop feed, and in three-phase commercial industrial installations where the ability to use an alternative source of power is necessary. They can also be used to close or open the power source.

The switch uses a manually charged over-toggle stored spring assembly to operate, which is independent of operation speed.

The silver plated copper blades are securely keyed between the vented rotor halves which ensure proper blade and contact alignment during switching.

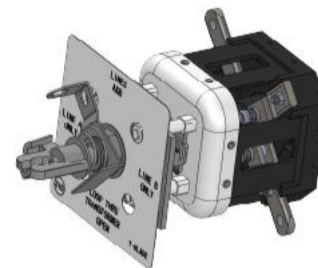

—15/25kV Single Phase Four-position Loadbreak Switch


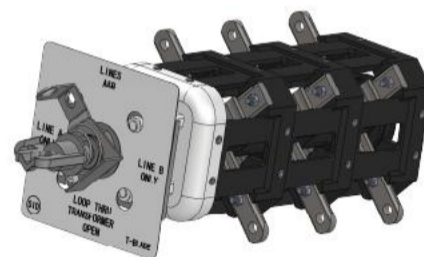


—15/25kV Three Phase Four-position Loadbreak Switch



◆ Parameters

Rated Voltage (Phase-to-Phase)	15/25kV
Withstand Voltage (50/60Hz)	50kV/1min.
BIL and Full Wave Crest	125kV
Rated Current	630A/15kV; 400A/25kV
Short Time Withstand Current	20kA/2s
Mechanical operation life	>2000 times
Main circuit resistance	<200μΩ

◆ Dimensions (All dimensions are in mm[inch])

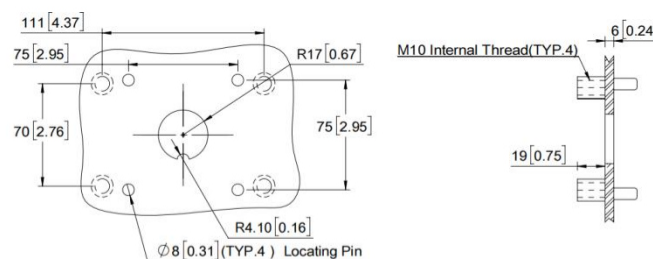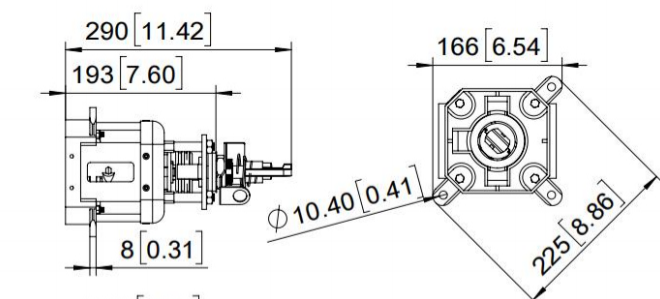

—Mounting hole & welding bolt

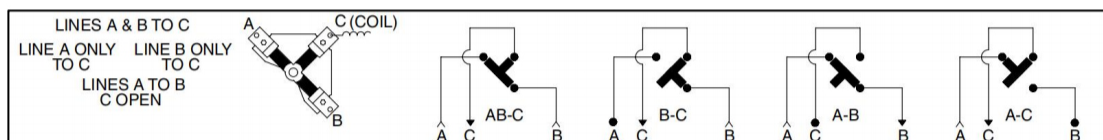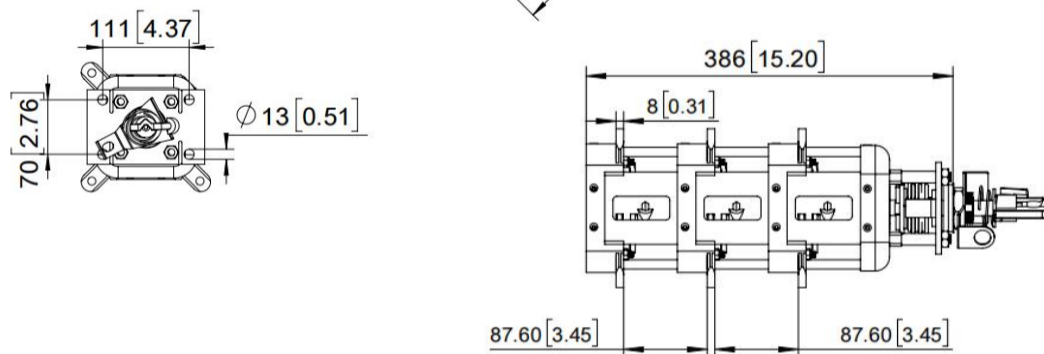

◆ Order Information

Description	Model
15/25kV Single Phase Four-position Loadbreak Switch (T blade)	SID-LS4P25-1-T
15/25kV Three Phase Four-position Loadbreak Switch (T blade)	SID-LS4P25-3-T

Note: Product related information is constantly updated. Please confirm relevant information with our company before placing an order.



Product information—15/25/35kV 100A Tap-changer Switch


◆ General

The tap-changer switch is designed for use in distribution transformers to tap the winding terminals to get the different voltage value.


The switch body, rotor, and shaft are made of a high strength, glass-filled thermoplastic material. The operating shaft is sealed against leakage by two high temperature resistant O-Rings.

The tap-changer switch is no excitation switch, operate it just in no load condition.

The switch has 6 contacts and five positions, can change the transformer voltage: -5%, -2.5%, 0, 2.5%, 5%

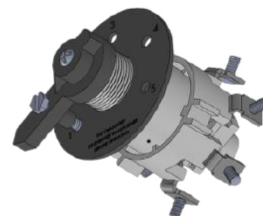

—Single Phase Tap-changer

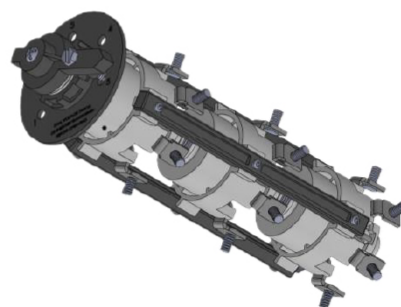


—Three Phase Tap-changer

◆ Parameters

Rated Voltage (Phase-to-Phase)	15/25/35kV
Withstand Voltage (50/60Hz)	50kV/1min.
BIL and Full Wave Crest	150kV
Rated Current	100A

◆ Dimensions (All dimensions are in mm[inch])

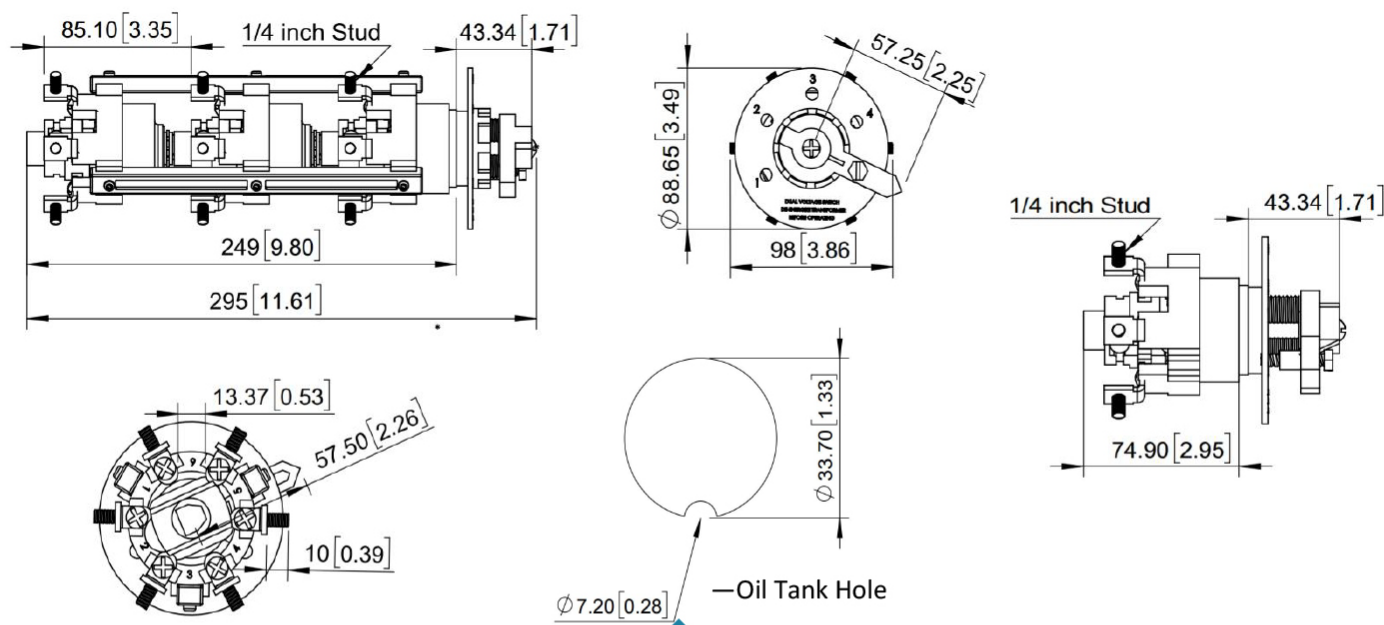

◆ Order Information


Description	Model
15/25/35kV 100A Single Phase Tap Changer	SID-TYKG1-35/100-6X5-1
15/25/35kV 100A Three Phase Tap Changer	SID-TYKG1-35/100-6X5-3

Note: Product related information is constantly updated. Please confirm relevant information with our company before placing an order.




Product information—Oil-immersed Current Limited Backup Fuse

4) 15kV Current Limited Backup Fuse (16-125A)

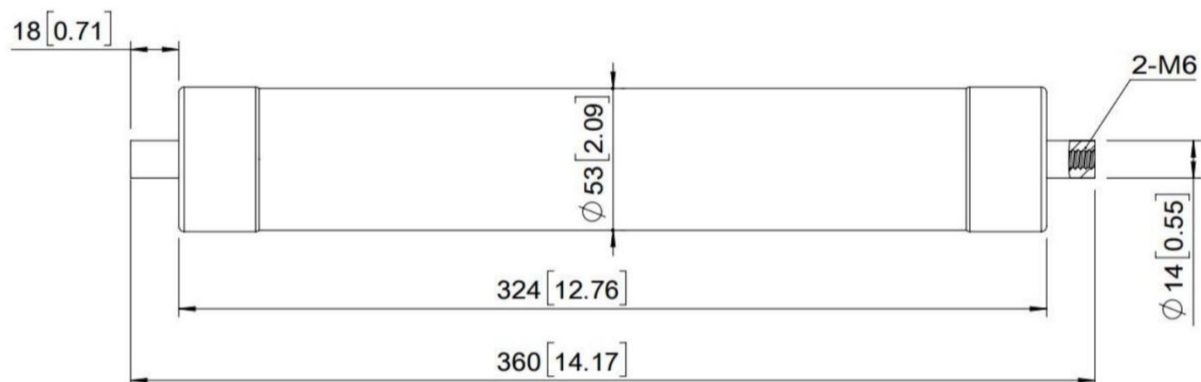

Maximum Interrupting Current (kA)	Continuous Voltage Rating (kV)	Continuous Current Rating (A)	Catalog Number
50	15	16	SID-XRNT4-15/16
50	15	30	SID-XRNT4-15/30
50	15	40	SID-XRNT4-15/40
50	15	50	SID-XRNT4-15/50
50	15	65	SID-XRNT4-15/65
50	15	80	SID-XRNT4-15/80
50	15	100	SID-XRNT4-15/100
50	15	125	SID-XRNT4-15/125

5) 15kV Current Limited Backup Fuse (150-200A)

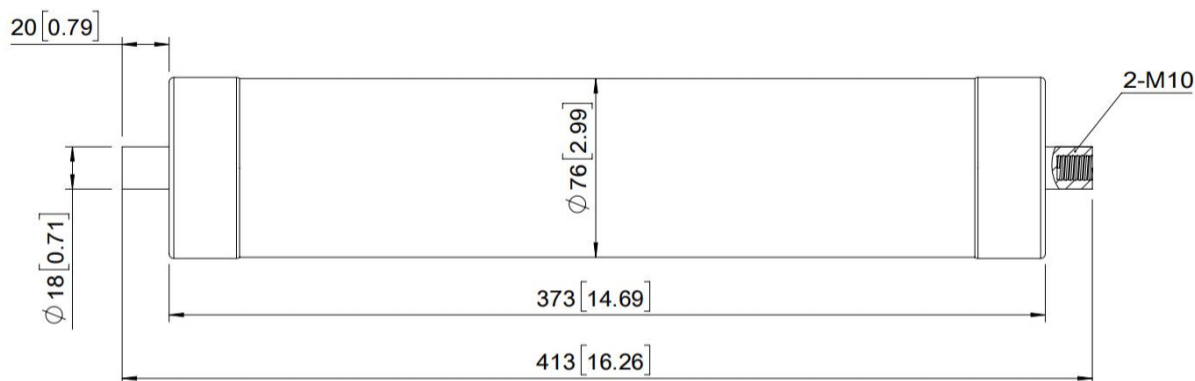

Maximum Interrupting Current(kA)	Continuous Voltage Rating (kV)	Continuous Current Rating (A)	Catalog Number
50	15	150	SID-XRNT4-15/150
50	15	175	SID-XRNT4-15/175
50	15	200	SID-XRNT4-15/200

Note: Product related information is constantly updated. Please confirm relevant information with our company before placing an order.



Product information—8.3/15/23kV Sidewall-mounted Bay-O-Net Fuse Holder

◆ General

The Bay-O-Net fuse holder is designed for use in pad-mounted or subsurface distribution transformer. It is used with fuse link to protective the secondary short circuit faulted of transformer, such as current sensing fuse link, dual sensing fuse link, dual element fuse link.

The fuse holder is with a flapper valve inside the housing which closes when it is removed. This results in minimal oil spillage from the transformer tank which increases safety to line personnel during fuse changeouts, reduces potential of environmental concerns with oil pillage, reduces potential of oil contamination on the molded rubber elbow connections.





—23kV Sidewall-mounted Bay-O-Net Fuse holder

◆ Parameters

Rated Voltage (Phase-to-Phase)	23kV
Withstand Voltage (50/60Hz)	50kV/1min.
BIL and Full Wave Crest	150kV
Rated Current	160A

◆ Dimensions (All dimensions are in mm[inch])

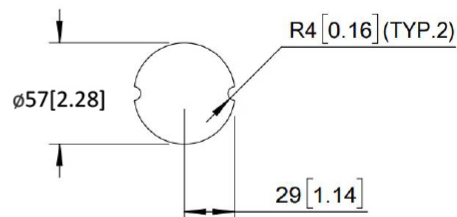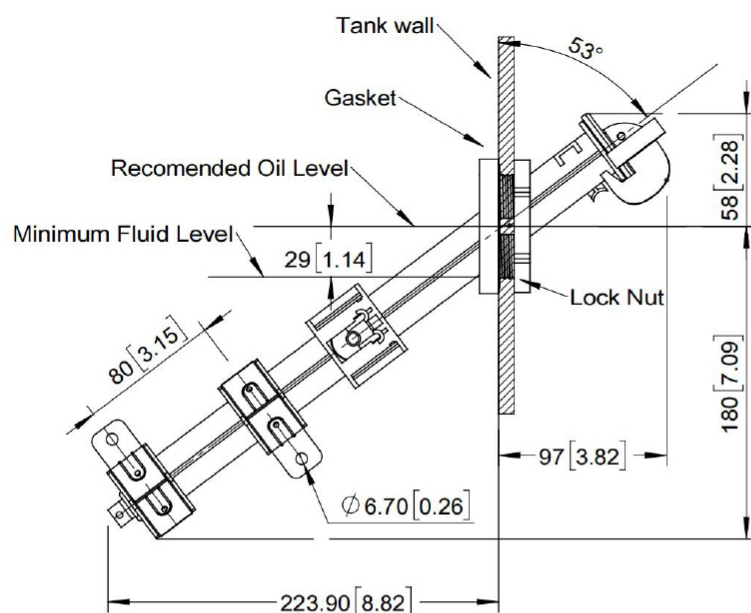

◆ Order Information

Description	Model
8.3/15/23kV Sidewall-mounted Bay-O-Net Fuse holder	SID-PRNT4-23

Note: Product related information is constantly updated. Please confirm relevant information with our company before placing an order.




Product information—Bay-O-Net Fuse Holder Drip Tray (Drip Guard)

◆ General


This drip tray prevents dripping of oil or other insulating fluids onto molded rubber terminators, cables, and arresters during removal of the Bay-O-Net fuse holder with our drip guard for sidewall mount Bay-O-Net fuse holders.

This drip tray protects rubber products that may not be chemically compatible with the dielectric fluid.

The drip tray is installed simply by snapping it around the neck of the Bay-O-Net fuse Holder.

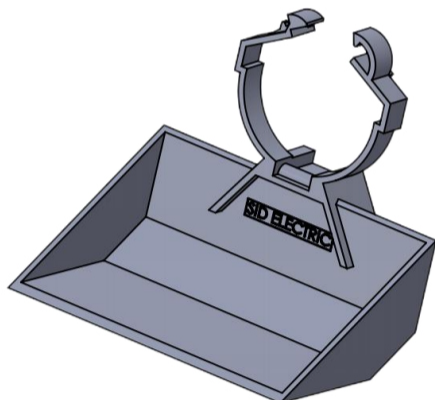

◆ Dimensions (All dimensions are in inch[mm])

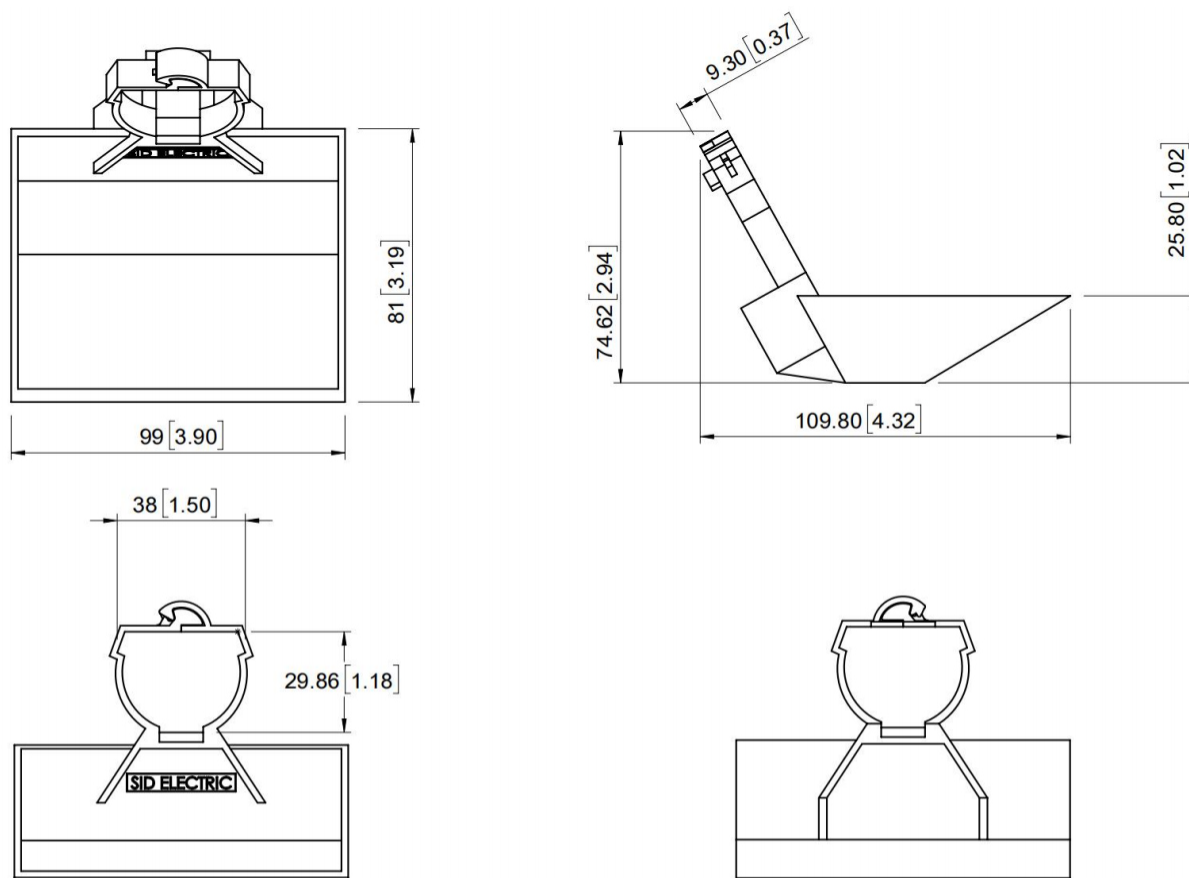

◆ Order Information

Description	Model
Bay-O-Net Fuse Holder Drip Tray (Drip Guard)	SID-JYH1-1

Note: Product related information is constantly updated. Please confirm relevant information with our company before placing an order.



Product information—15/25/28kV 200A Bushing Well with Removable Stud

◆ General

The bushing well is epoxy molded, and is externally clamped for sidewall mounting on single or three phase transformers filled with transformer oil, or an approved equivalent. It mates with all bushing inserts meeting applicable IEEE std 386-2016. It's knurled copper stud with rolled threads provides excellent conductivity.

It is also with a removable stud that offers easy field replacement of the bushing stud with a standard 5/8" socket wrench in the event of damage or breakage in the field. A 7/64" hex has been provided in the portion of the stud which mates into the bushing insert. Should breakage occur here this feature allows for easy stud removal from the insert.




—Epoxy Bushing Well With Removable Stud

◆ Parameters

Rated Voltage (Phase-to-Phase)	15/25/28kV
Maximum Rating Phase-to-phase	28kV
Withstand Voltage (50/60Hz)	45kV/1min.
BIL and Full Wave Crest	125kV
Continuous Current	200A
Short Time Withstand Current	10kA rms symmetrical for 0.17s
	3.5kA rms symmetrical for 3.0s

◆ Dimensions (All dimensions are in mm[inch])

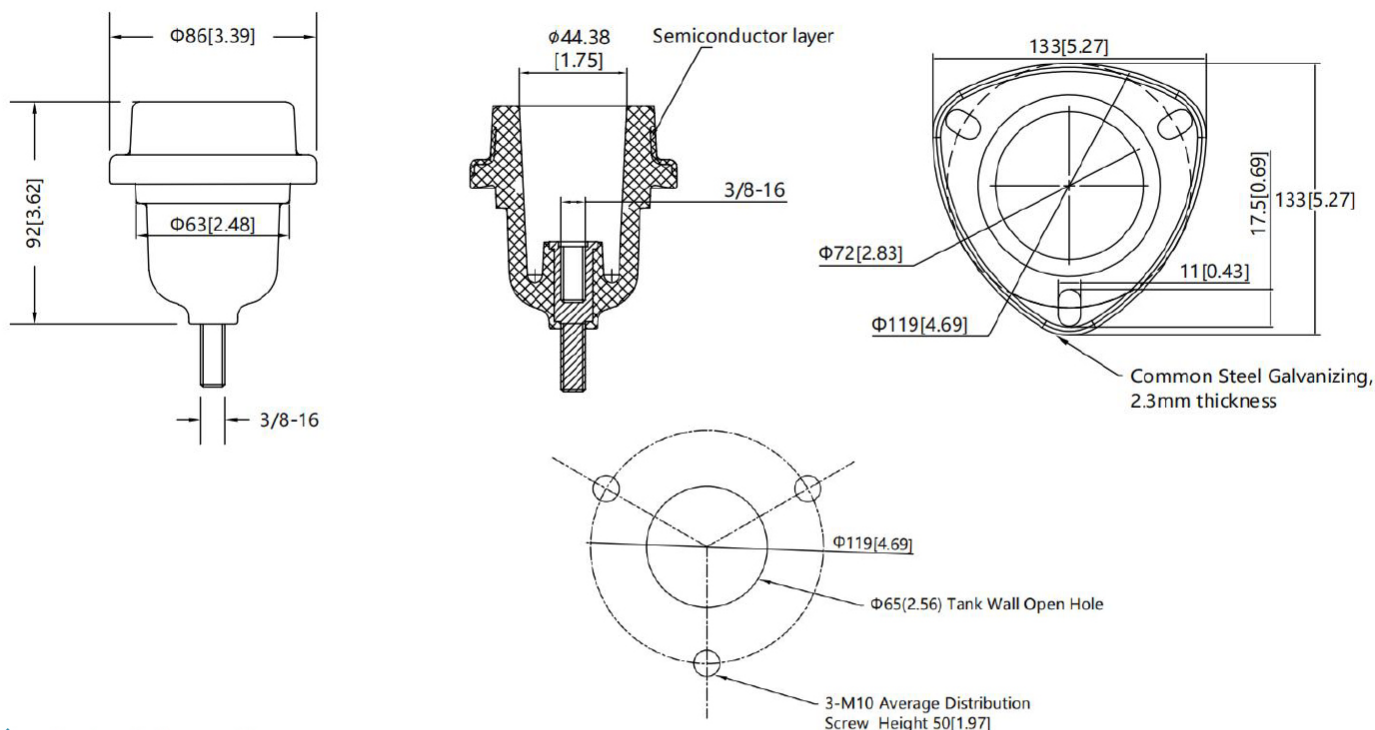

◆ Order Information

Description	Model
15/25/28kV 200A Bushing Well with Removable	SID-TGZ-28/200-1

Note: Product related information is constantly updated. Please confirm relevant information with our company before placing an order.



Product information—15/25/35kV 200A Tri-clamp Bushing Well


◆ General

The tri-clamp bushing well is high temperature nylon (HTN) molded, and is externally clamped for sidewall mounting on single or three phase transformers filled with transformer oil, or an approved equivalent. It mates with all bushing inserts meeting applicable IEEE std 386-2016. It's knurled copper stud with rolled threads provides excellent conductivity. It also has an optional removable stud that offers easy field replacement of the bushing stud with a standard 5/8" socket wrench in the event of damage or breakage in the field. A 7/64" hex has been provided in the portion of the stud which mates into the bushing insert. Should breakage occur here this feature allows for easy stud removal from the insert.

- Molded-in semi-conductive collar
- No additional clamps required
- Bail tabs molded into tri-clamp body


◆ Parameters

Rated Voltage (Phase-to-Phase)	15/25/35kV
Withstand Voltage (50/60Hz)	50kV/1min.
BIL and Full Wave Crest	150kV
Continuous Current	200A
Short Time Withstand Current	10kA rms symmetrical for 0.17s
	3.5kA rms symmetrical for 3.0s

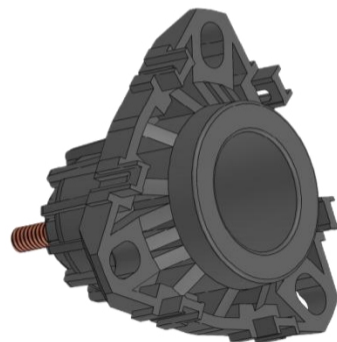


—Tri-clamp Bushing Well



◆ Dimensions (All dimensions are in mm[inch])

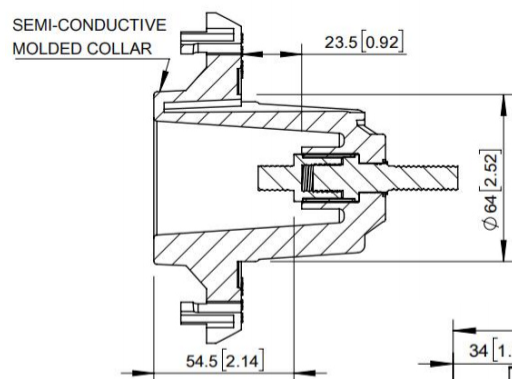

STUD LOCATIONS
RECOMMENDED SIZE:
3/8" - 16 x 1.625"
(M10 x 40 mm)

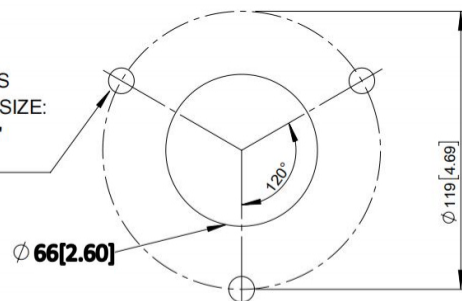

Mounting hole & welding bolt

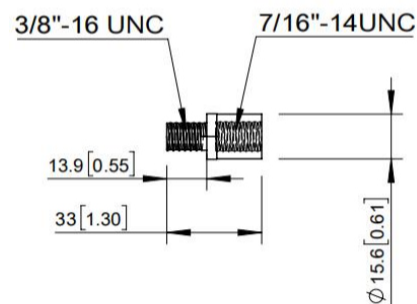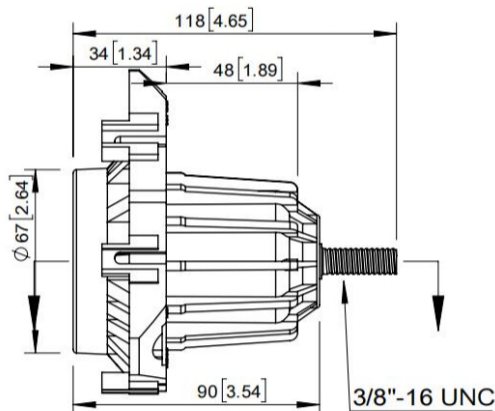

Removable nut

◆ Order Information

Description	Model
15/25/35kV 200A Tri-clamp Bushing Well with Fixed Stud	SID-TGZ-35/200-1
15/25/35kV 200A Tri-clamp Bushing Well with Removable Stud	SID-TGZ-35/200-2

Note: Product related information is constantly updated. Please confirm relevant information with our company before placing an order.




Product information—Transformer Oil Temperature Gauge

◆ General


The transformer oil temperature gauge is suitable for the instrument installed on the side wall of the transformer for temperature measurement and indication. The temperature measurement range is 0~120°C.

◆ Material & Parameters

- Case: 304 stainless steel, polish, non-vent.
- Pointer: aluminium, white painting, non-adjustable.
- Lens: polymethyl methacrylate.
- Accuracy: 3%
- Connection: Cr stainless steel M27 X 2.
- Tube & Socket & Movement: 304 stainless steel.
- Temperature gauge well: 304 stainless steel, polish, internal thread, M27 X 2, external thread, M27 X 2, 1/2-14NPT, diameter 12mm, length 173mm.

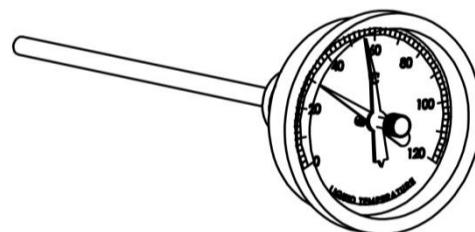

◆ Dimensions (All dimensions are in mm[inch])

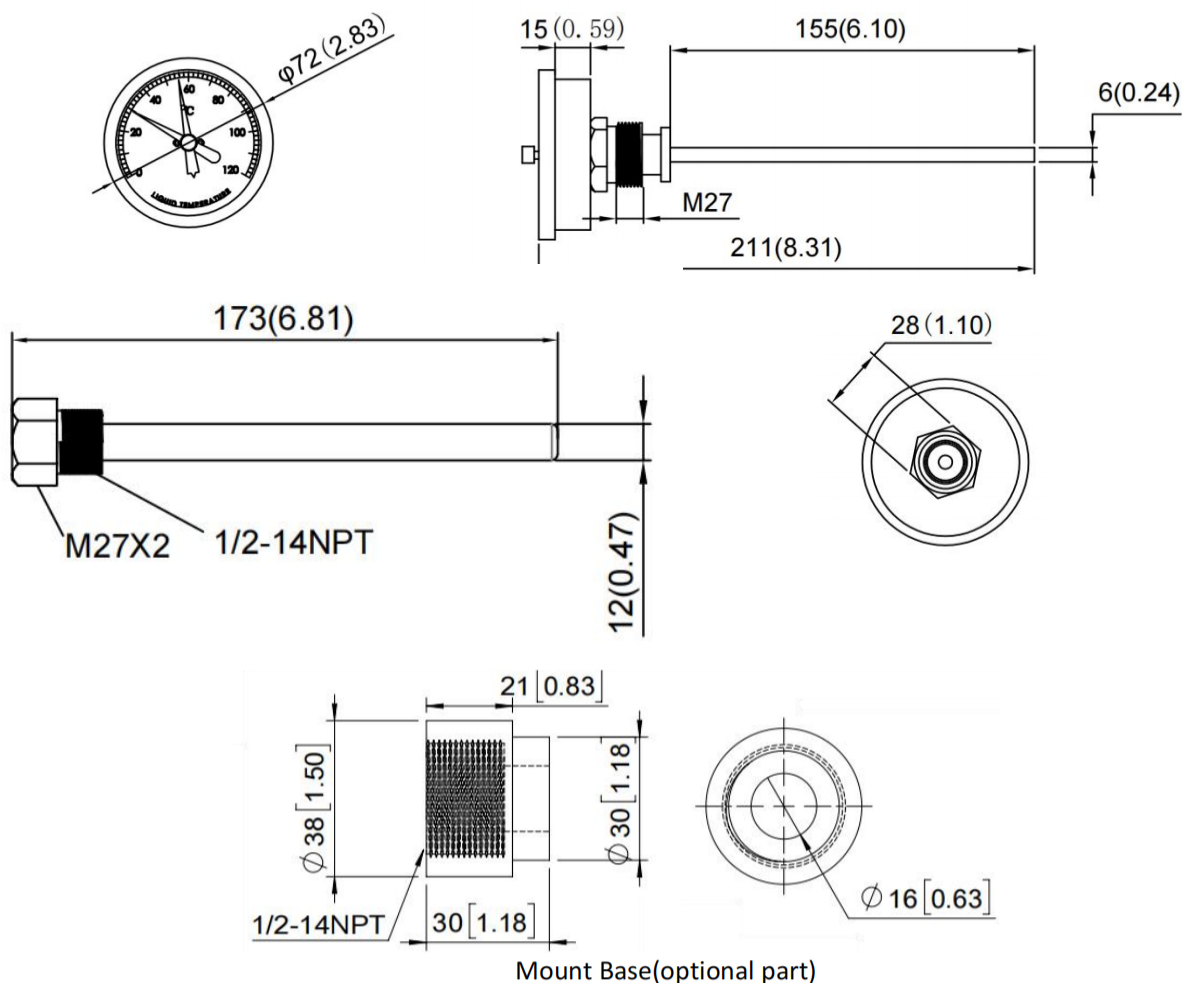

◆ Order Information

Description	Model
Transformer Oil Temperature Gauge	SID-YWJ-211-0

Note: Product related information is constantly updated. Please confirm relevant information with our company before placing an order.




Product information—Transformer Oil Level Gauge

◆ General






This type oil level gauge is suitable for the oil level indication of small and medium-sized oil-immersed transformer oil storage cabinets and on-load switch oil storage cabinets. There is no severe vibration and magnetic field at the installation position, and the oil level gauge should be installed vertically.

◆ Material

- Case: Aluminum profile, plastic spray.
- Pointer: Aluminium
- Lens: Glass.
- Oil level connecting rod: Brass.
- Float: Polyurethane.

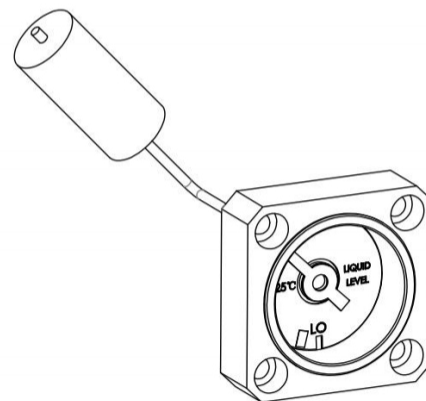

◆ Dimensions (All dimensions are in mm)

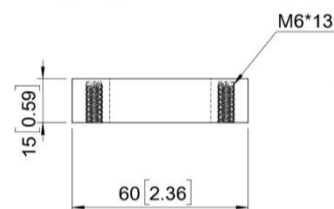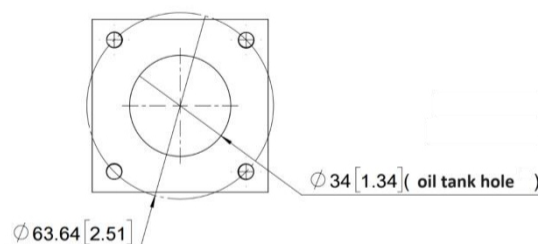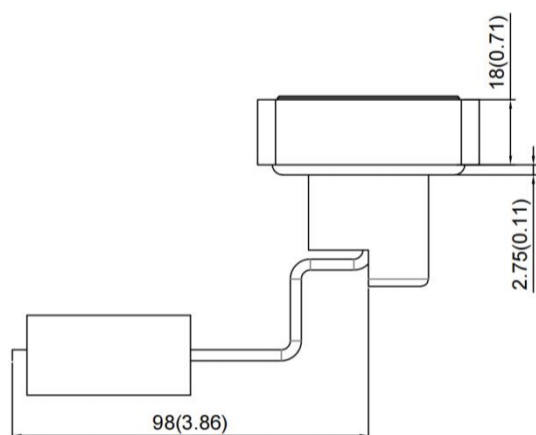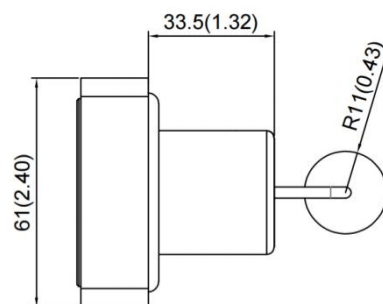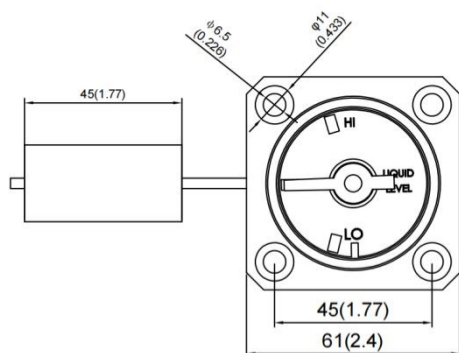

Mount Base(optional part)

◆ Order Information

Description	Model
Transformer Oil Level Gauge	SID-YWJ-ZTK-0

Note: Product related information is constantly updated. Please confirm relevant information with our company before placing an order.



Product information—Transformer Pressure Vacuum Gauge


◆ General

The vacuum pressure gauge is a pressure measuring instrument specially designed for box-type power transformers. The measuring range is -10~10PSIG.





◆ Parameters

Material:

- Case: 304 stainless steel, polish, non-vent
- Pointer: Aluminium, white painting, non-adjustable
- Lens: Polymethyl methacrylate
- Accuracy: 3%
- Connection: Brass 1/4 NPT-18
- Pressure spring tube: Phosphor copper

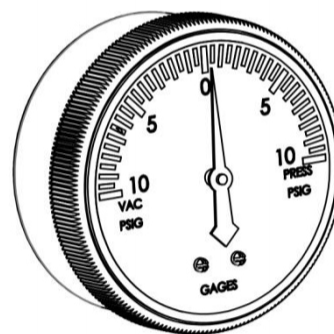

◆ Dimensions (All dimensions are in mm)

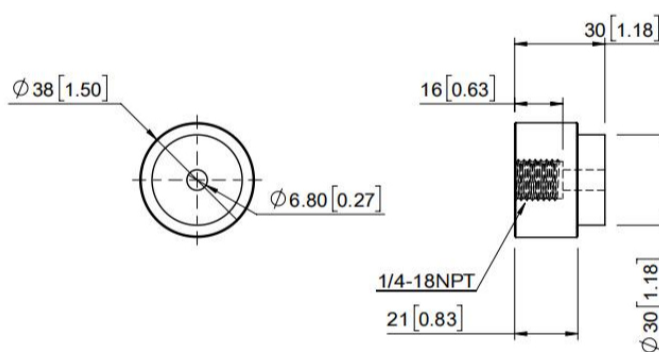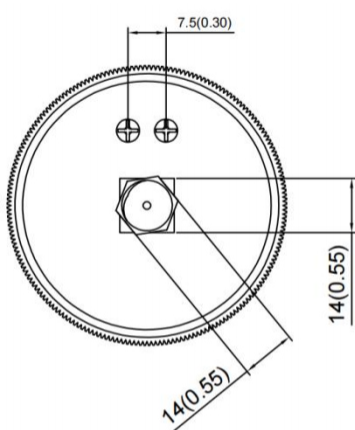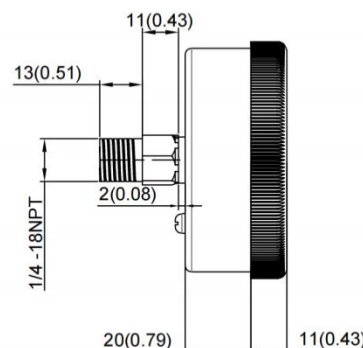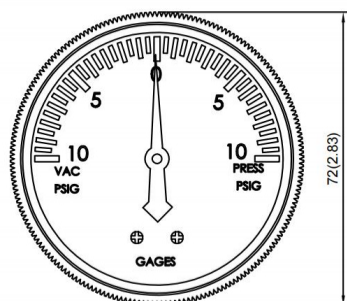

Mount Base(optional part)

◆ Order Information

Description	Model
Transformer Pressure Vacuum Gauge	SID-ZKB-072-0


Note: Product related information is constantly updated. Please confirm relevant information with our company before placing an order.




Product information—Transformer Pressure Relief Valve (YSF-P)

◆ General

The pressure relief valve is mainly used to prevent the gas pressure in the container from exceeding a predetermined value. When the pressure is higher than the release pressure (Pressure release opening value: $P=0.03 \pm 0.01\text{MPa}$ Or $P=0.06 \pm 0.01\text{MPa}$) the valve will automatically open to allow the gas to leak. The material is copper

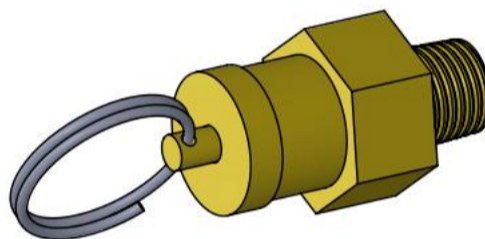

◆ Dimensions (All dimensions are in mm)

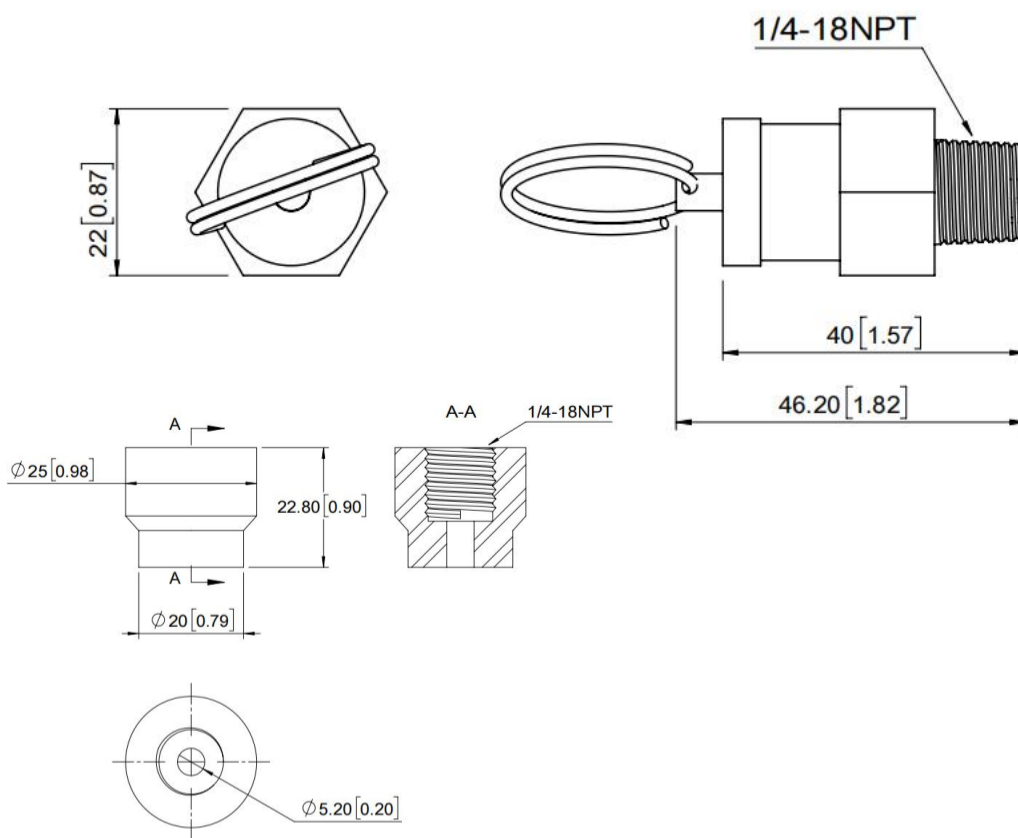

Mount Base(optional part)


◆ Order Information

Description	Model
Transformer Pressure Relief Valve ($P=0.06 \pm 0.01\text{MPa}$)	YSF-0.06
Transformer Pressure Relief Valve ($P=0.03 \pm 0.01\text{MPa}$)	YSF-0.03

Note: Product related information is constantly updated. Please confirm relevant information with our company before placing an order.



Product information—Transformer Ground lug

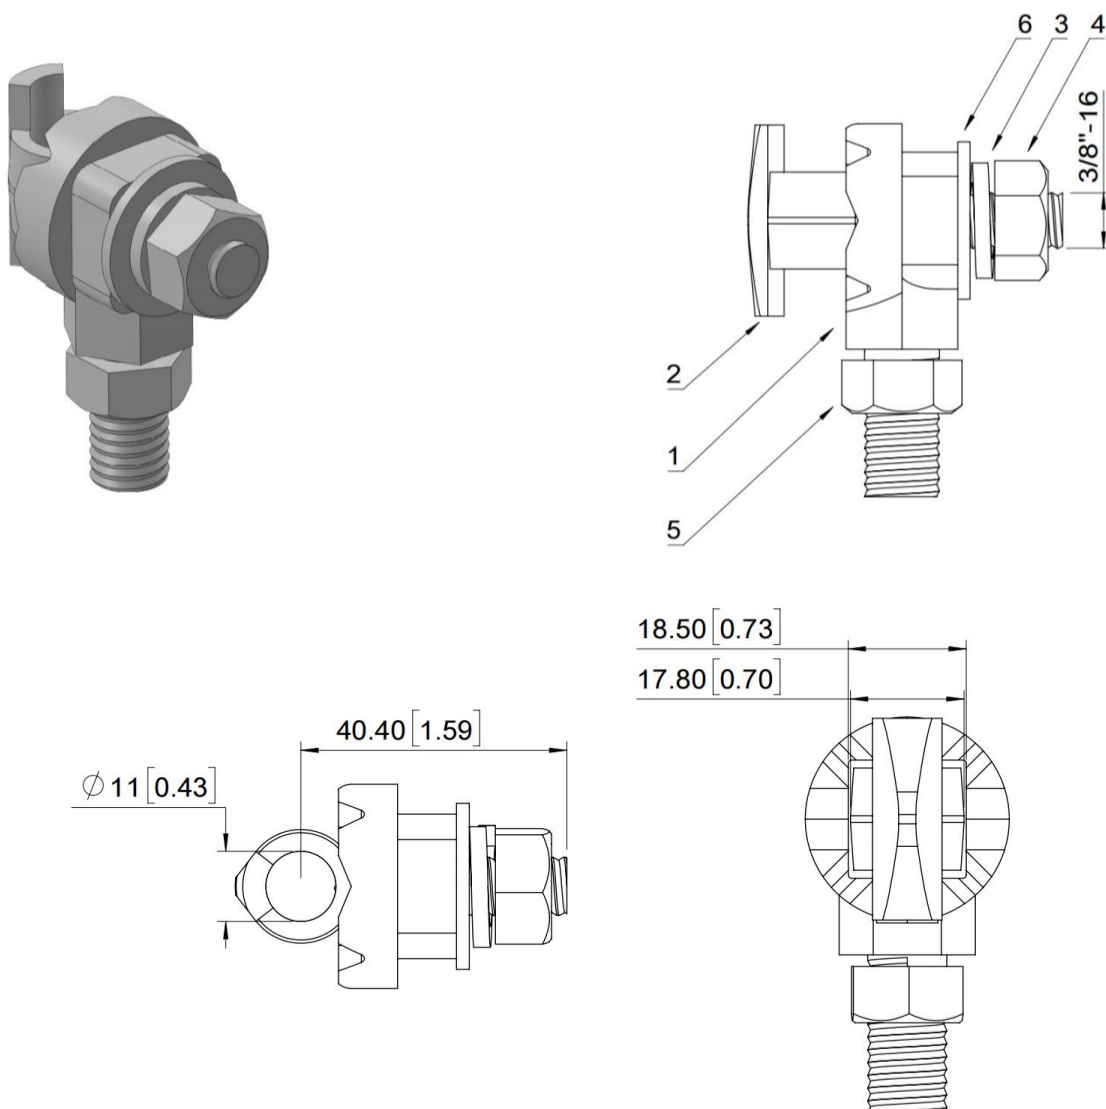

Tin plating on copper surface, thickness>5μm			
ITEM	DESCRIPTION	QTY	MATERIAL
1	Ground lug (18.5X18.5-0.5IN-13L=24.3)	1	Brass forging
2	Φ11 EyeBolt	1	Aluminum bronze precision casting
3	Steel Locking washer 3/8"	1	Stainless steel ANSI 304
4	Steel nuts 3/8"-16	1	Stainless steel ANSI 304
5	Steel nut 1/2"-13	1	Stainless steel ANSI 304
6	Steel washer 3/8"	1	Stainless steel ANSI 304

◆ Order Information

Description	Model
Transformer Ground Lug	SID-GL-01

Note: Product related information is constantly updated. Please confirm relevant information with our company before placing an order.



Product information—1" Straight Flange Globe Valve With Side Sampler

Parts List				
Item	Description	Material	QTY	Note
1	Pipe Plug	Hpb57-3	1PCS	1" NPT
2	O-Ring	Viton	1PCS	
3	Sampling Device	Hpb57-3	1PCS	3/8"
4	Cap	Hpb57-3	1PCS	
5	Valve Body	Hpb57-3	1PCS	
6	Gasket	EPDM	1PCS	Φ58.5*44*6mm

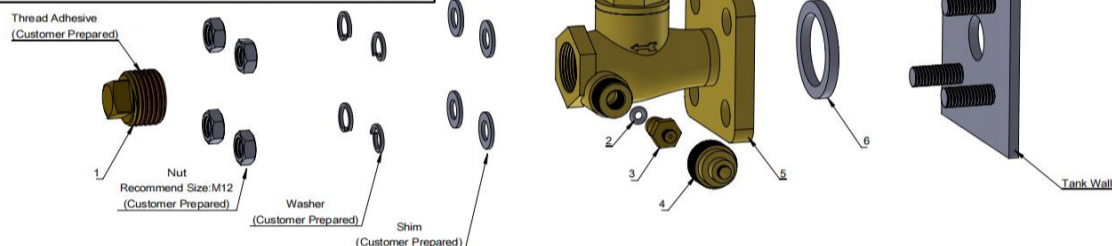


Fig 1 : Installation Diagram

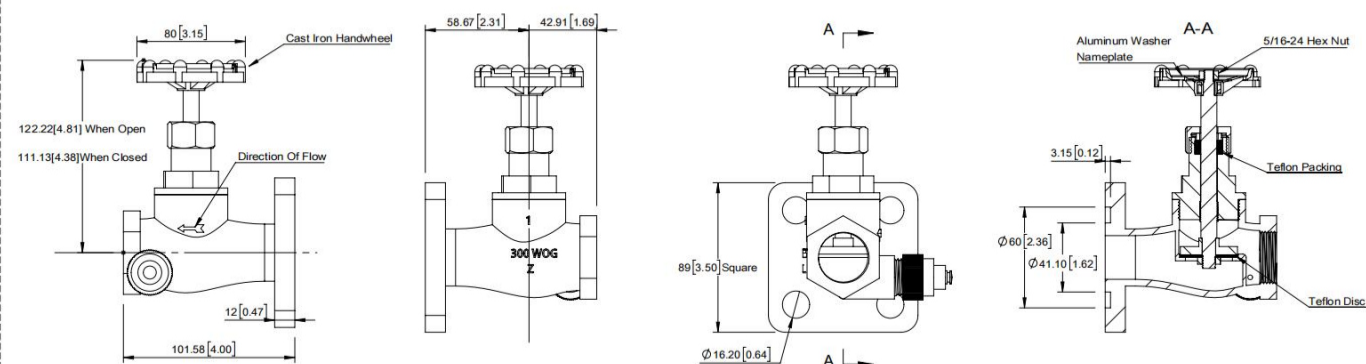


Fig 2 : Body




Fig 3 : Pipe Plug

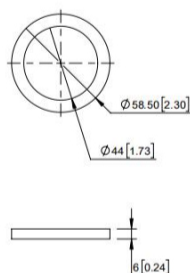


Fig 4 : Gasket

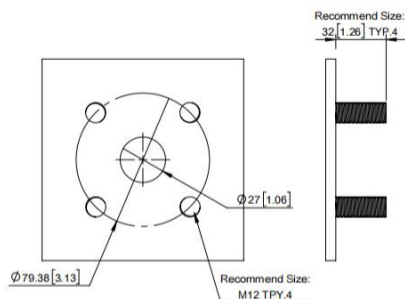


Fig 4 : Mounting Hole & Welding Bolt

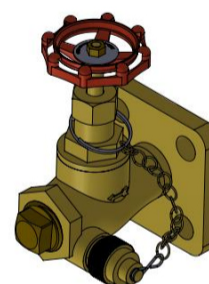


Fig 5 : 3D View

◆ Order Information

Description	Model
1" Straight Flange Globe Valve With Side Sampler, Brass Plug & Viton Gasket	SID-YF1-1/1019

Note: Product related information is constantly updated. Please confirm relevant information with our company before placing an order.

