
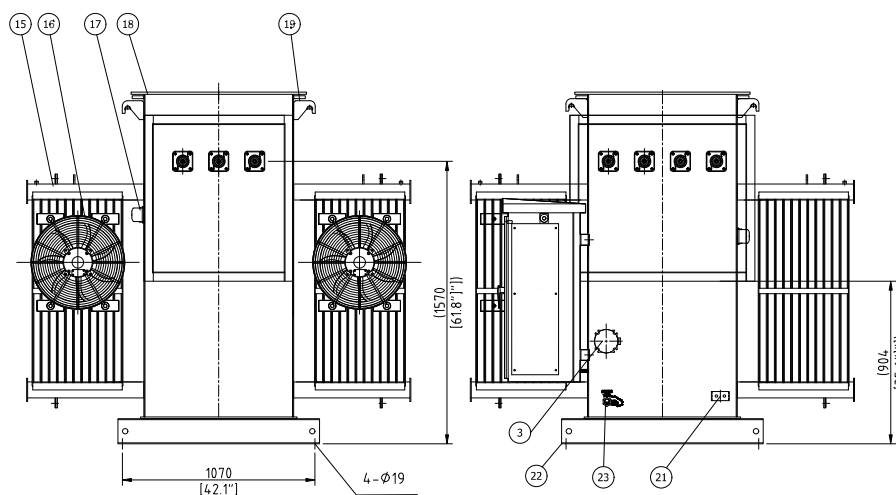




WEIGHT (KG)

TRANSFORMER ASSEMBLY DRY WEIGHT	3050
OIL	1450
TOTAL WEIGHT	4500
TANK&FITTINGS	1170

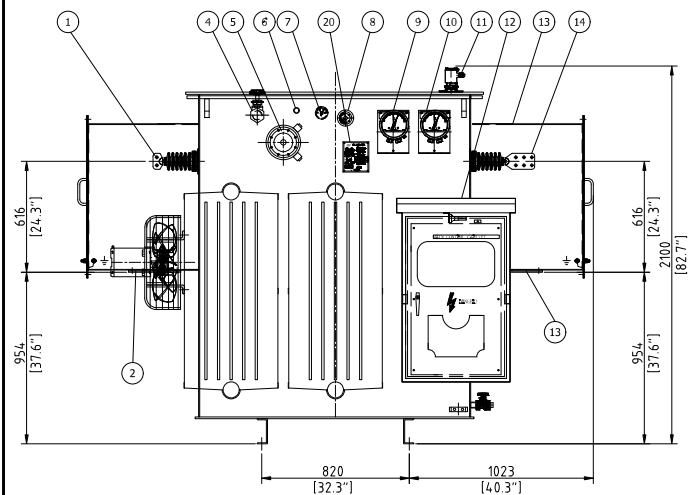



TECHNICAL DATA

RATING	1500/2000kVA
PHASE	3
PRIMARY VOLTAGE	14400V
HIGH VOLTAGE TAP RANGE	± 2.5
SECONDARY VOLTAGE	4160V
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
WINDING MATERIAL	COPPER
LOAD LOSS AT RATED VOLTAGE	13000W (ONAN)
NO LOAD LOSSES	1700W
IMPEDANCE (ONAN)	6.25%
COOLING METHOD	ONAN/ONAF
ALTITUDE	$\leq 1000m$
COLOR	ANSI 70 Sky Grey

H.V wiring
schematic diagramL.V wiring
schematic diagram

H.V terminal

L.V terminal (x0, x1, x2, x3)



ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	HV BUSHING (15KV 208A)	3
2	FLANGE, H.V	1
3	QUICK-ACTING OIL PRESSURE RELAY SYJ9-50-25	1
4	OIL FILL VALVE	1
5	TERMINAL BOX	1
6	VENT VALVE	1
7	VACUUM PRESSURE GAUGE SID-ZKB-072-0	1
8	LIQUID LEVEL INDICATOR YZF-90TH	1
9	LIQUID TEMPERATURE INDICATOR BWY-803A	1
10	WINDING TEMPERATURE INDICATOR BWR-04AAW	1
11	PRESSURE RELIEF DEVICE YSF9-35/50KJ	1
12	AIR COOLING CONTROL BOX	1
13	FLANGE, L.V	1
14	LV BUSHING (15KV 417A)	4
15	RADIATORS (PG1100-12/520)	4
16	FANS	2
17	TAP CHANGER, 63/20-6x5	1
18	TANK AND COVER ASSEMBLY	1
19	LIFTING EYE FOR ACTIVE PART WITH TANK COVER	4
20	NAME PLATE	1
21	GROUND PAD ON TANK WALL	2
22	BASE WELDED TO TANK	1
23	DRAIN VALVE WITH SAMPLING DEVICE	1
24	LOW VOLTAGE CABLE BOX	1
25	HIGH VOLTAGE CABLE BOX	1

TYPE
SF-1500(2000)/14.4/4.16DWG. NAME
general assembly


DRAWN	CHECKED	CHECKED	APPROVED	FIRST ANGLE PROJECTION	SCALE	1/30	2023/11/14
Mike W.	Iris J.	Ella W.	Sam S.	REF. DWG. NO.			REV. NO.
JZP				DWG. NO.	SF1500(2000)-231124-01		



SUBSTATION TRANSFORMER

STANDARDS CSA C88
1500kVA HV 14400V DELTA
LV 4160V Grdy/2400
TYPE OF COOLING ONAN/ONAF
PERCENT IMPEDANCE: 6.25 %
TYPE OF COIL 45# NO PCB
CORE & COIL (NO TANK) : 4140 LBS
TANK & FITTINGS: 2340 LBS
LIQUID: 430 GALS 3200 LBS
TOTAL: 9920 LBS

PRODUCT NO. :
TYPE SF-1500/2000/14.44/4.16
CONDUCTOR MATERIAL: COPPER
PHASE 3
FREQUENTY 60Hz
TEMPERATURE RISE 65° C/ 65° C
SERIAL NO. :
DATE OF MFG. :
H. V. Um/BIL/AC 15/95/34 kV
L. V. Um/BIL/AC 5/60/19 kV

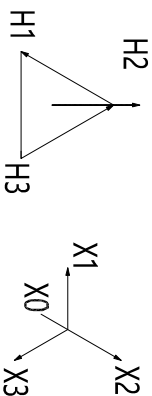


VECTOR GRAPH (Dyn1)

H. V WIRING

L. V WIRING

SCHEMATIC DIAGRAM

SCHEMATIC DIAGRAM

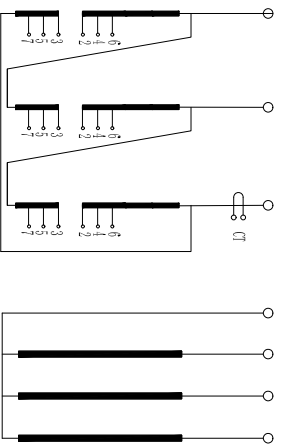



Tapping Range	H. V			L. V	
	Voltage (V)	Current (A)		Current (A)	
1 2-3	15120	57.28	76.37	4160	208.2
2 3-4	14760	58.67	78.23		
3 4-5	14400	60.14	80.19		
4 5-6	14040	61.68	82.24		
5 6-7	13680	63.31	84.41		277.6

DE-ENERGIZE TRANSFORMER
BEFORE OPERATING TAPCHANGER


ITEM:
MANUFACTURER:
PART NUMBER:

WWW.JIEZOUPOWER.COM




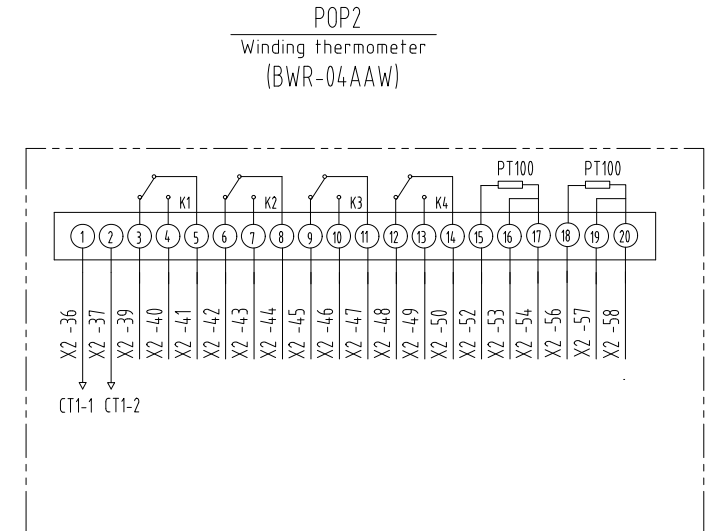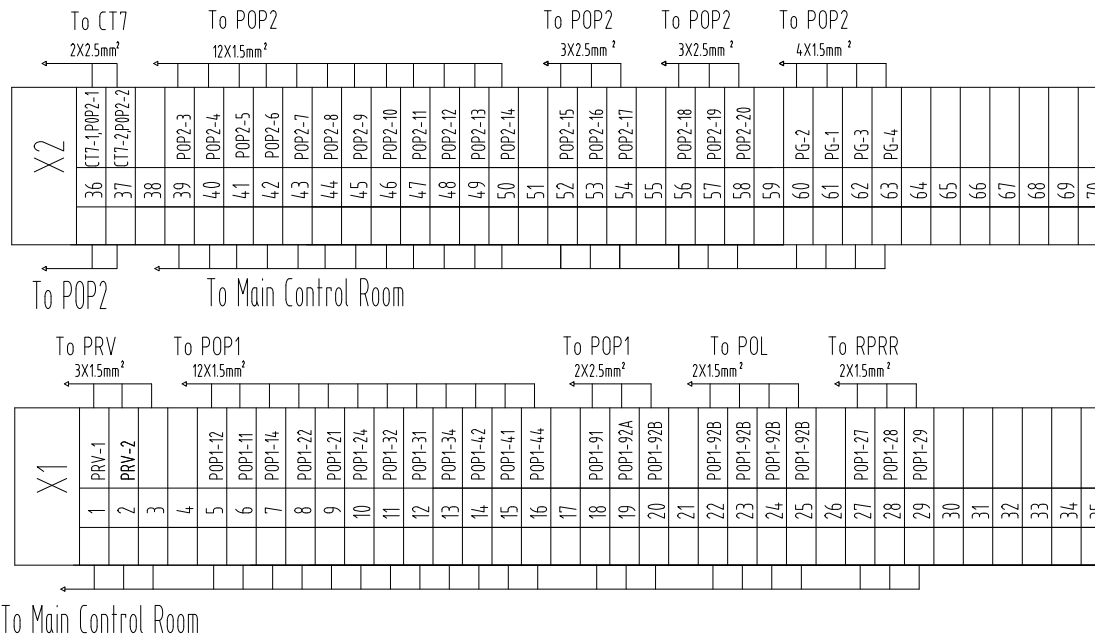


PRV
Pressure relief valve
(YSF9-35/50KJ)




POP1
Oil Temperature controller
(BWY-804A)

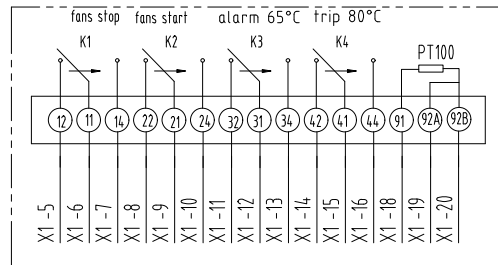


POL
oil level gauge
(YZF-90TH)




RPRR
Rapid Pressure Rise relay
SYJ9-50-25




CT1
Winding temperature CT
(10VA)



PG
Pressure gauge



This drawing contains contacts signal and model

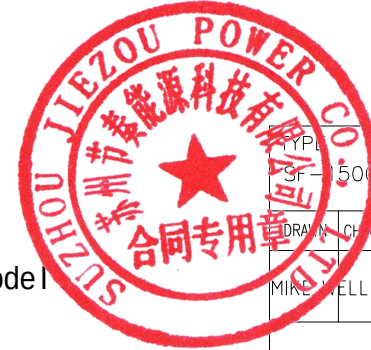

TYPE SF-1500(2000)/14.4/4.16				DWG. NAME Transformer Secondary Diagram			
DRAWN	CHECKED	CHECKED	APPROVED	FIRST ANGLE PROJECTION	SCALE		
MIRAL	WELLA	WIRIS	J	SAM	S	REF. DWG. NO.	REV. NO.
JZP				DWG. NO.	SF1500(2000)-231124-01		1

Control instructions:

- 1. The power supply of the fan in this cooler control system adopts AC 120V and 60HZ. A total of two cooling fans. The fan has a rated current of 0.5A and a starting current of 2A. The control power supply adopts AC220V. The control transformer TC is converted through the user's AC120V power supply.
- 2. The main components of the cooler control system, such as circuit breakers, contactors and relays, are made of Schneider brand products. For details, please refer to the component list.
- 3. The cooler control system is designed with three modes: manual control/stop/automatic control. It is implemented by switching 2KK.
 - 1) In the manual control mode, the control system manually starts and stops the fan according to 2KK on the inner door.
 - 2) Automatic control mode: the start and stop of the transformer cooling fan is determined by the PTC100 signal of the thermometer. When the temperature of the thermometer POP1 reaches 55℃, its contacts POP1:21 and POP1:24 close to automatically start the fan. When the temperature of the thermometer drops to 45℃, the contacts POP1:11 and POP1:14 are disconnected, and the fan will be automatically stopped. The thermometer temperature can be set according to the user's needs.







CHANGE	TYPE				DWG. NAME			
	SF-1500(2000)/14.4/4.16				SF2 air-cooled control box			
	DRAWN	CHECKED	CHECKED	APPROVED	FIRST ANGLE PROJECTION	SCALE	1	REV. NO.
	Mike W.	Iris J.	Ella W.	Sam S.	JZP SINCE 1989 FROM USA			
SF1500(2000)-231124-01				0				

Control Panel


- Instructions for requirements: (Component with UL list)
1. The component installation board is 25mm from the left and right sides of the cabinet, 80mm from the top and 150mm from the bottom.
 2. The shell is 2mm thick stainless steel, and the component mounting plate is 2mm thick galvanized plate.
 3. The width of the installation board of the left and right side components in the cabinet is 25mm.
 4. The fixed rod of the cabinet top ring is made of stainless steel and is seamlessly welded between the cabinet.
 5. The front door and cabinet need to have an M6*20 stainless steel rod with a grounding wire.
 6. The stainless steel grounding device is seamlessly welded between the cabinet.

Layout of the inner door panel

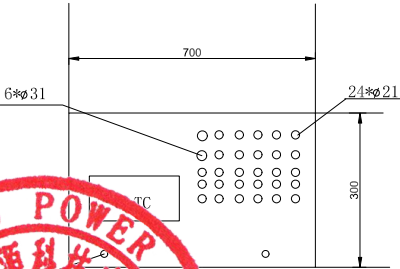
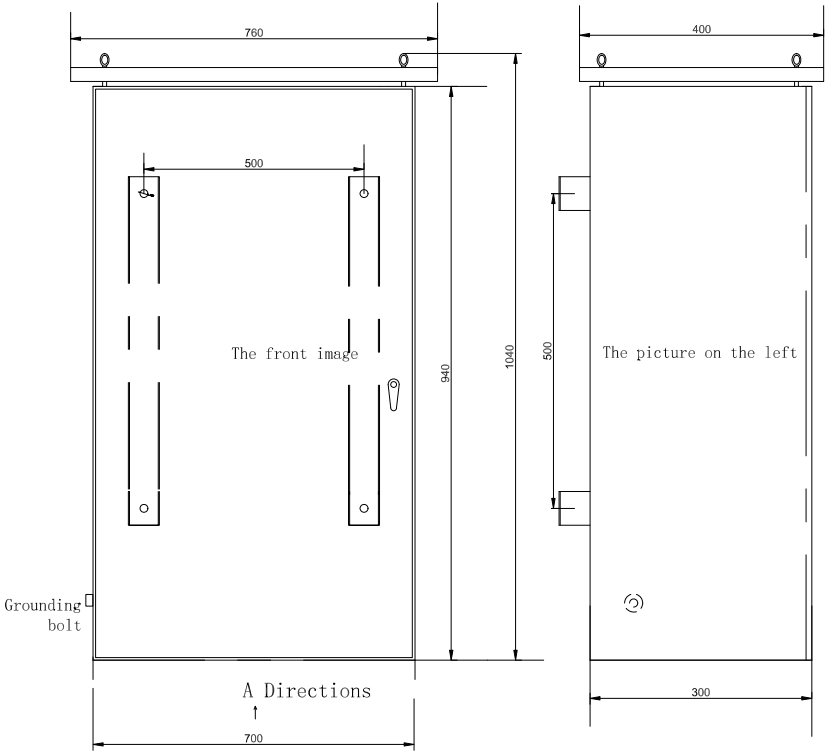



TYPE					DWG. NAME		
SF-1500(2000)/14.4/4.16					SF2 air-cooled control box		
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1
Mike W.	Iris J.	Ella W		Sam S.			REV. NO.
SF1500(2000)-231124-01							

CHANGE





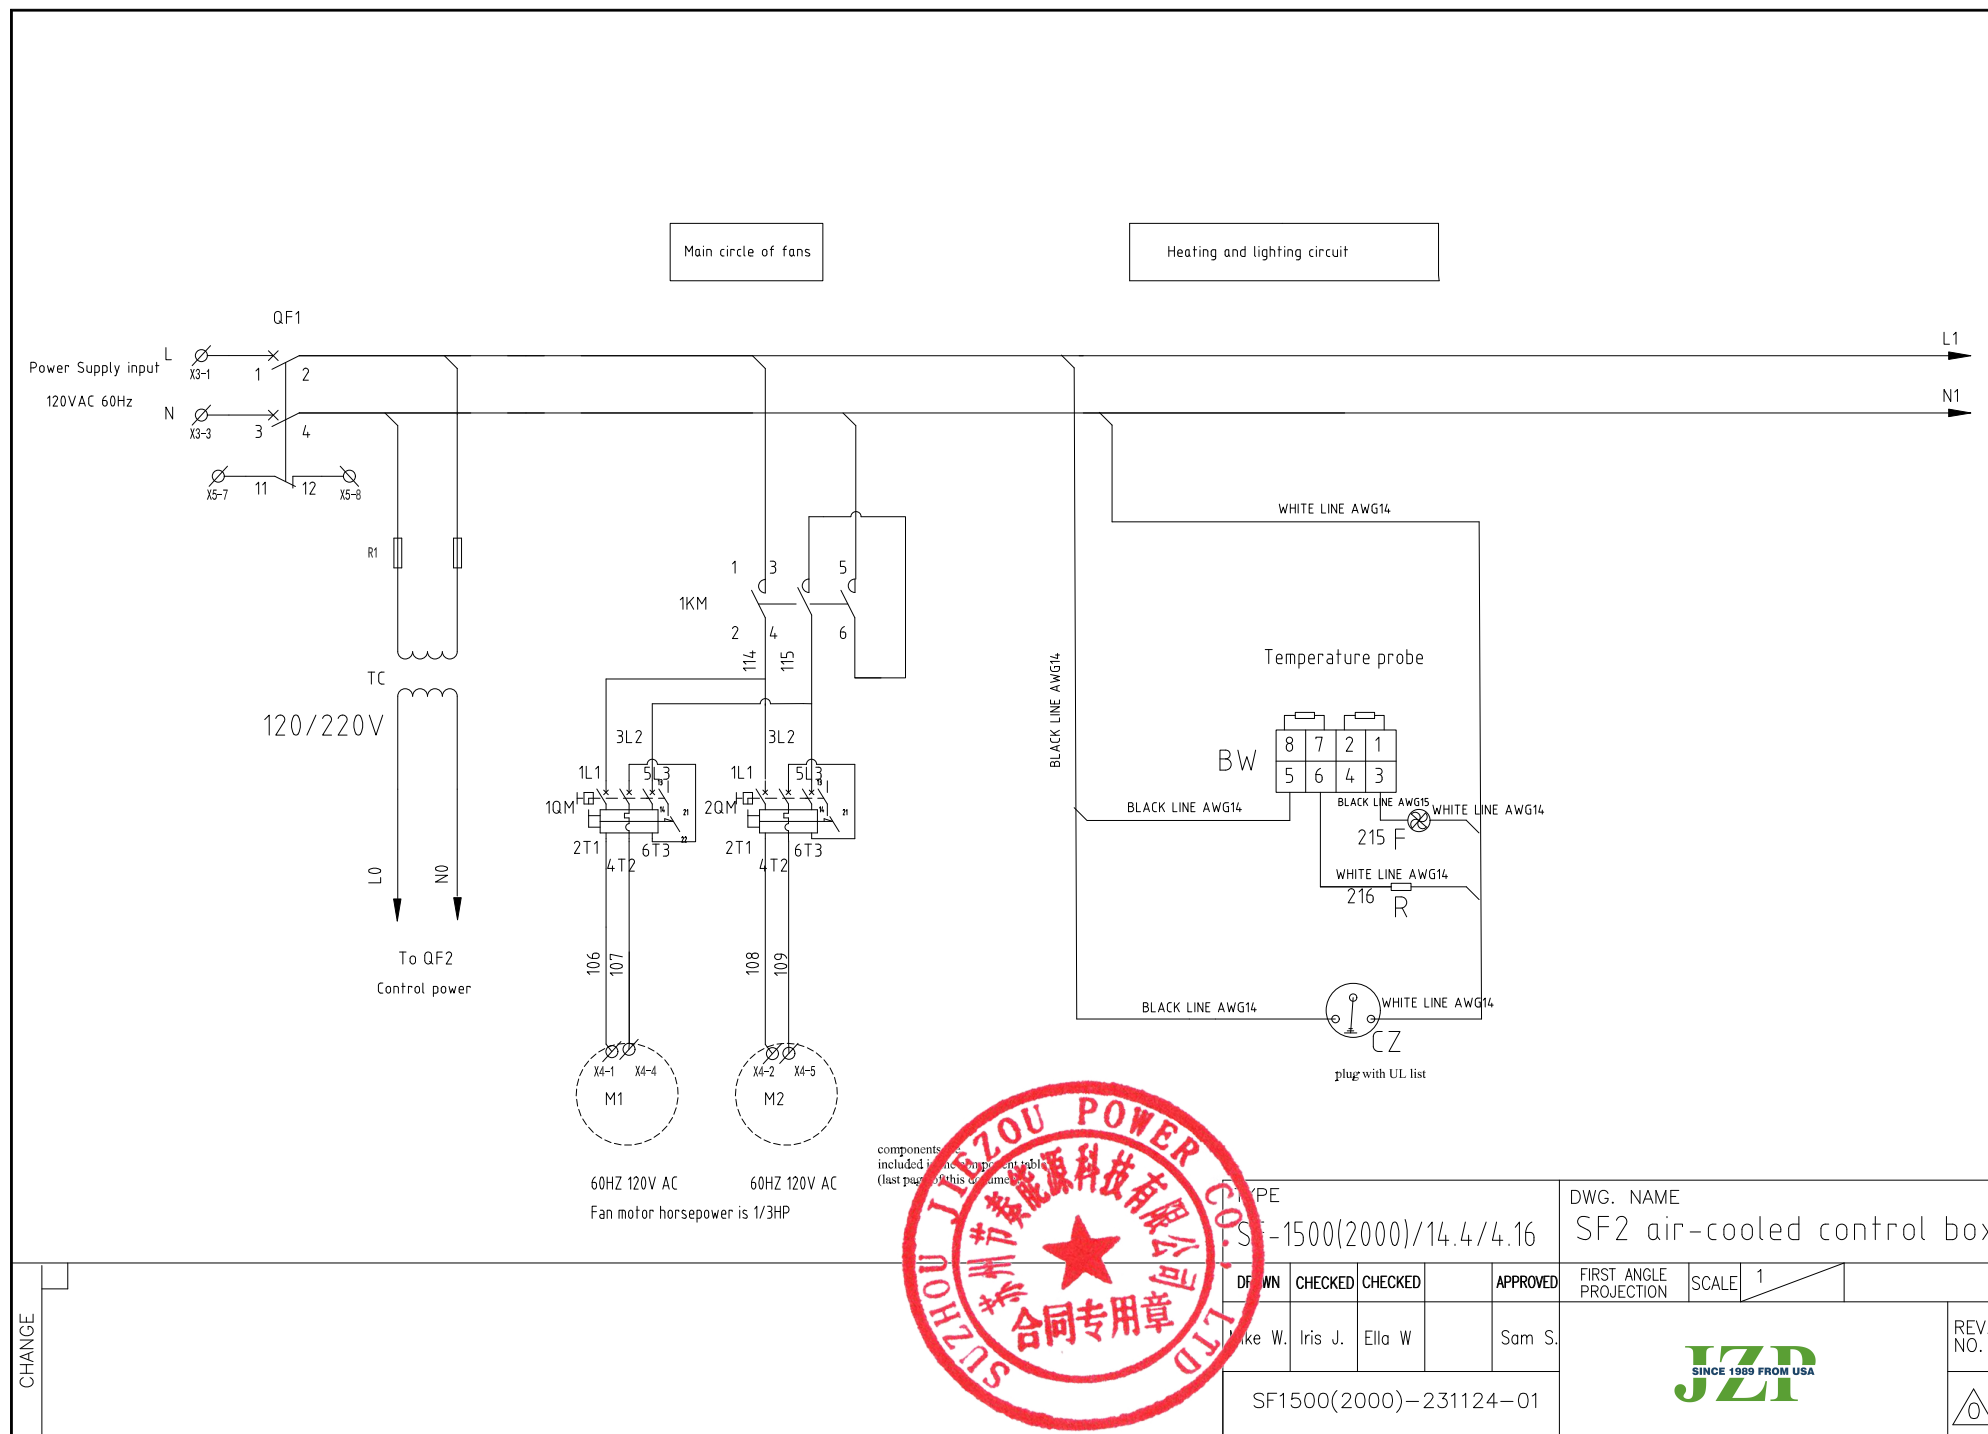


Power supply, fan signal



CHANGE

TYPE				DWG. NAME			
SF1500(2000)/14.4/4.16				SF2 air-cooled control box			
DRAWN	CHECKED	CHECKED	APPROVED	FIRST ANGLE PROJECTION	SCALE	1	REV. NO.
Mike W.	Iris J.	Ella W.	Sam S.				
SF1500(2000)-231124-01							

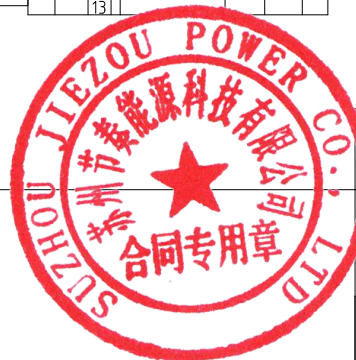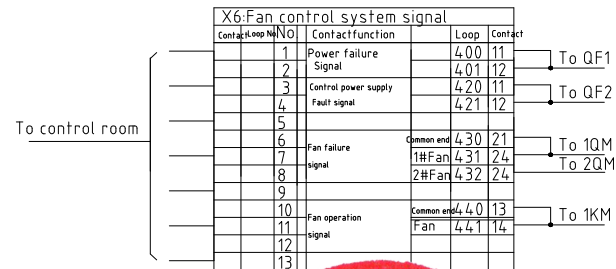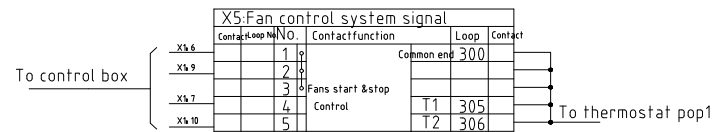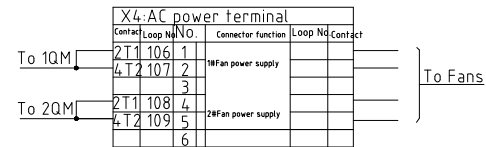


TYPE					DWG. NAME			
SF-1500(2000)/14.4/4.16					SF2 air-cooled control box			
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1	
Mike W.	Iris J.	Ella W.		Sam S.	JZP SINCE 1989 FROM USA			REV. NO.
SF1500(2000)-231124-01								0

CHANGE

components are UL list

No.	Component code	Component name	Model	Qty	Brand
1	QF1	AC air circuit breaker	OSMC65H2D50	1	Schneider
2	QF2	AC air circuit breaker	OSMC65H2D6	1	Schneider
3	SD	Auxiliary contact	A9A26924	2	Schneider
4	KA2	Intermediate relay	RXM4AB2F7/AC220V	1	Schneider
5	1QM 2QM	Motor protection circuit breaker	GV2MP14	2	Schneider
6	BS	Humidity controller (Including humidity sensor)	3118.000 AC120V	1	WEITU
7	BC	Temperature controller (including temperature probe)	3110.000 AC120V	1	WEITU
8	1KM	AC contactor	LC1D50AM7 /AC220V 60HZ	1	Schneider
9	R	Condensate load heater	DJR-S-50W	1	MENGYOU
10	SA	State transition switch (manual stop automatic)	XB4BD33	1	Schneider
11	CZ	RECEPTACLE	GFCI 120V	1	ZHONGTONG
12	CK	Respiratory net mask	FU9801 B P2+Rain cover	1	KAKU
13	F	Fan	Series 80 AC120 V	1	SUNTRONIX
14	X1	Terminal	UK5N	35	PHOENIX
15	X3	Terminal	UK10N	3	PHOENIX
16	X4	Terminal	UK5N	12	PHOENIX
17	X5	Terminal	UK2.5B	19	PHOENIX
18	R1	Fuse	FNQ-R-6	1	Bussmann
19	TC	control power transformer	DG-800VA	1	IN:AC120V OUT:AC220V
18					
19					
20					
21					
22					

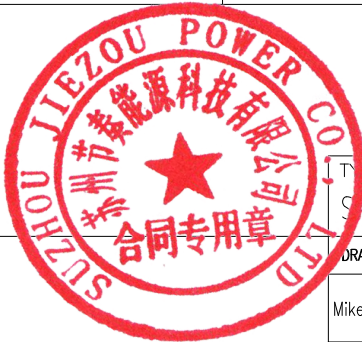

DWG. NAME
SF2 air-cooled control box

TYPE
SF-1500(2000)/14.4/4.16

DRAWN	CHECKED	CHECKED	APPROVED
Mike W.	Iris J.	Ella W	Sam S.

FIRST ANGLE PROJECTION

SCALE

1



REV. NO.



SF1500(2000)-231124-01

CHANGE