

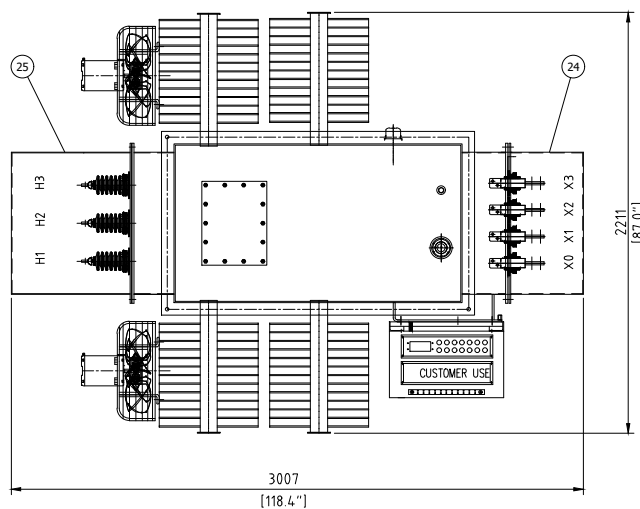
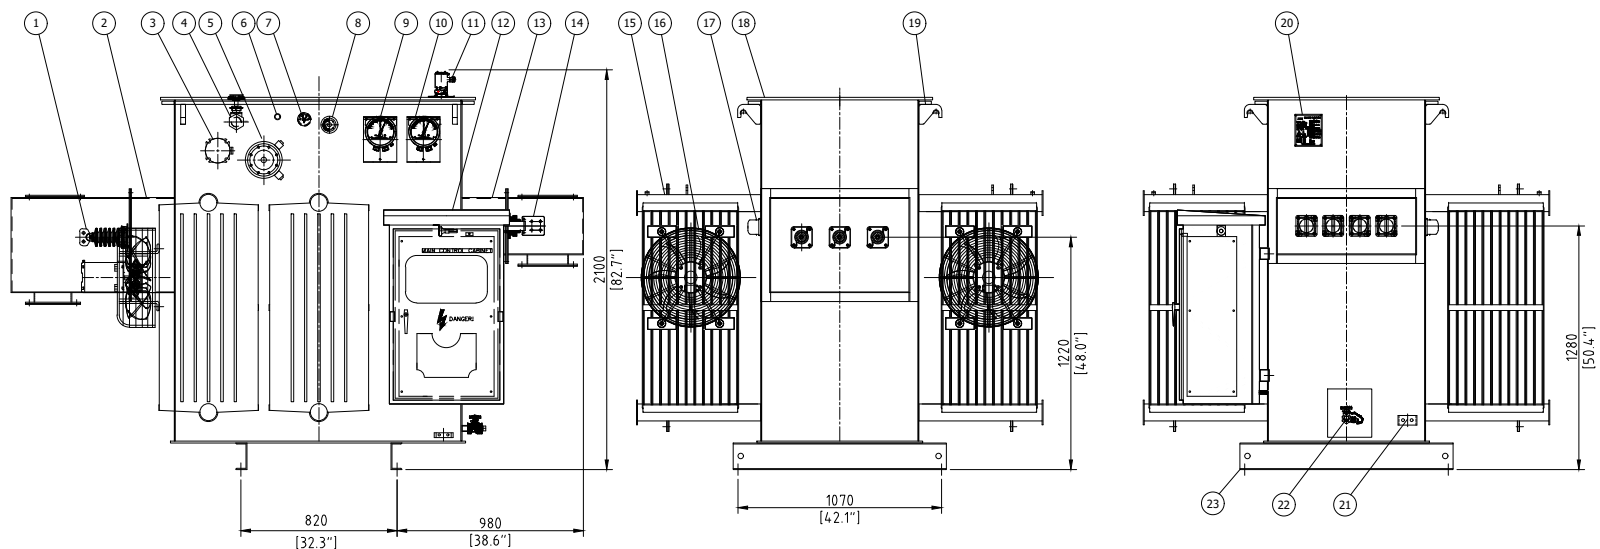






H.V terminal



L.V terminal (x0,x1,x2,x3)

H.V wiring
schematic diagramL.V wiring
schematic diagram

WEIGHT (KG)

CORE & COIL	2600
OIL	1390
TOTAL WEIGHT	5300

TECHNICAL DATA

RATING	2000/2600kVA
PHASE	3
PRIMARY VOLTAGE	14400V
HIGH VOLTAGE TAP RANGE	±2×2.5
SECONDARY VOLTAGE	600V
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
WINDING MATERIAL	COPPER
LOAD LOSS AT RATED VOLTAGE	15000W (ONAN)
NO LOAD LOSSES	2300W
IMPEDANCE(ONAN)	6.25%
COOLING METHOD	ONAN/ONAF
ALTITUDE	≤1000m
COLOR	ANSI 70 Sky Grey

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	HV BUSHING (15KV 208A)	3
2	THROAT FLANGE,H.V	1
3	QUICK-ACTING OIL PRESSURE RELAY	1
4	OIL FILL VALVE	1
5	TERMINAL BOX	1
6	VENT VALVE	1
7	VACUUM PRESSURE GAUGE	1
8	LIQUID LEVEL INDICATOR	1
9	LIQUID TEMPERATURE INDICATOR	1
10	WINDING TEMPERATURE INDICATOR	1
11	PRESSURE RELIEF DEVICE	1
12	AIR COOLING CONTROL BOX	1
13	THROAT FLANGE,LV	1
14	LV BUSHING (1.0KV 3150A)	4
15	RADIATORS(PG1100-12/520)	4
16	FANS	2
17	TAP CHANGER,125/20-6×5	1
18	TANK AND COVER ASSEMBLY	1
19	LIFTING EYE FOR ACTIVE PART WITH TANK COVER	4
20	NAME PLATE	1
21	GROUND PAD ON TANK WALL	2
22	BASE WELDED TO TANK	1
23	DRAIN VALVE WITH SAMPLING DEVICE	1
24	LOW VOLTAGE CABLE BOX	1
25	HIGH VOLTAGE CABLE BOX	1

TYPE
SF-2000(2600)/14.4/0.6DWG. NAME
general assembly

DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1/30	2023/11/14	
Mike W.	Iris J.	Ella W.		Sam S.	REF. DWG. NO.				REV. NO.
					DWG. NO.				



SUBSTATION TRANSFORMER

STANDARDS CSA C88
2000kVA HV 14400V DELTA
LV 600V Grdy/347

TYPE OF COLING ONAN/ONAF

PERCENT IMPEDANCE: 6.25 %

TYPE OF OIL 45# NO PCB

CORE & COLL (UNTAKING): 5730 LBS

TANK & FITTINGS: 2580 LBS

LIQUID: 410 GALS 3060 LBS

TOTAL: 11640 LBS

PRODUCT NO. : 1.710.3556

TYPE SF-2000/2600/14.44/0.6

CONDUCTOR MATERIAL: COPPER

PHASE 3

FREQUENCY 60Hz


TEMPERATURE RISE 65°C/ 65°C

SERIAL NO.:

DATE OF MFG.:

H.V. Um/BIL/AC 15/95/34 kV

L.V. Um/BIL/AC 1.2/30/10 kV

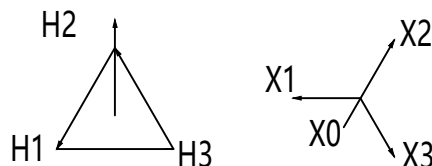

VECTOR GRAPH (Dyn1)



H.V WIRING

L.V WIRING

Tapping Range	H.V			L.V		
	Voltage (V)	Current (A)		Voltage (V)	Current (A)	
		ONAN	ONAF		ONAN	ONAF
1 2-3	15120	76.37	99.28	600	1924.5	2501.9
2 3-4	14760	78.23	101.70			
3 4-5	14400	80.19	104.24			
4 5-6	14040	82.24	106.92			
5 6-7	13680	84.41	109.73			

SCHEMATIC DIAGRAM

SCHEMATIC DIAGRAM





DE-ENERGIZE TRANSFORMER
BEFORE OPERATING TAPCHANGER

ITEM:


MANUFACTURER:

PART NUMBER:

WWW.JIEZOUPOER.COM

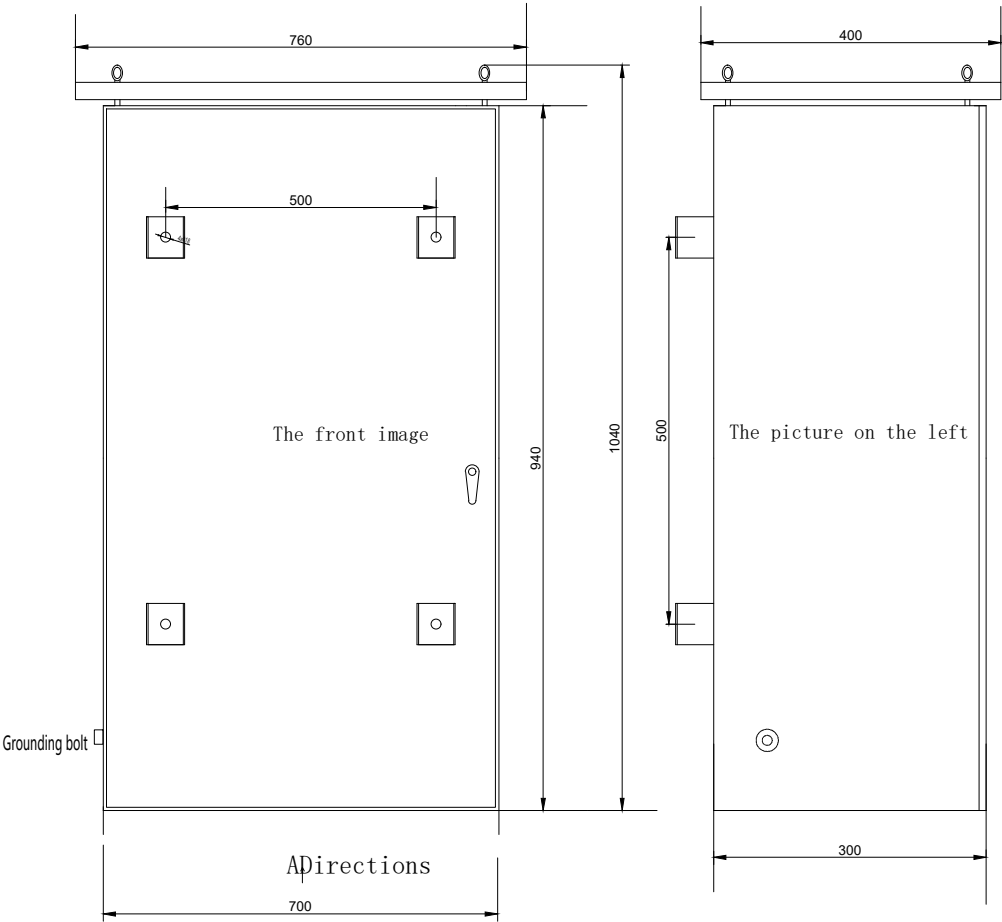


- Instructions for requirements:
1. The component installation board is 25mm from the left and right sides of the cabinet, 80mm from the top and 150mm from the bottom.
 2. The shell is 2mm thick stainless steel, and the component mounting plate is 2mm thick galvanized plate.
 3. The width of the installation board of the left and right side components in the cabinet is 25mm.
 4. The fixed rod of the cabinet top ring is made of stainless steel and is seamlessly welded between the cabinet.
 5. The front door and cabinet need to have an M6*20 stainless steel rod with a grounding wire.
 6. The stainless steel grounding device is seamlessly welded between the cabinet.

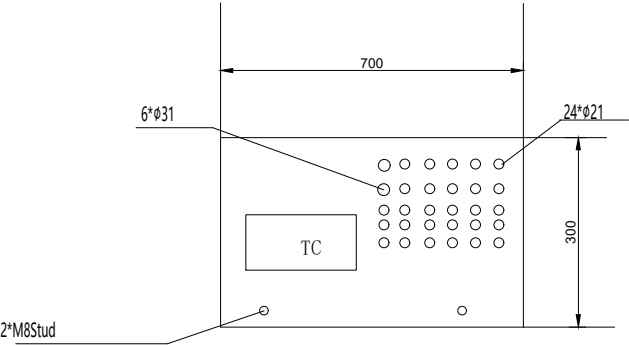


CHANGE

TYPE					DWG. NAME			
					General Assembly Drawing			
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1	
								REV. NO.

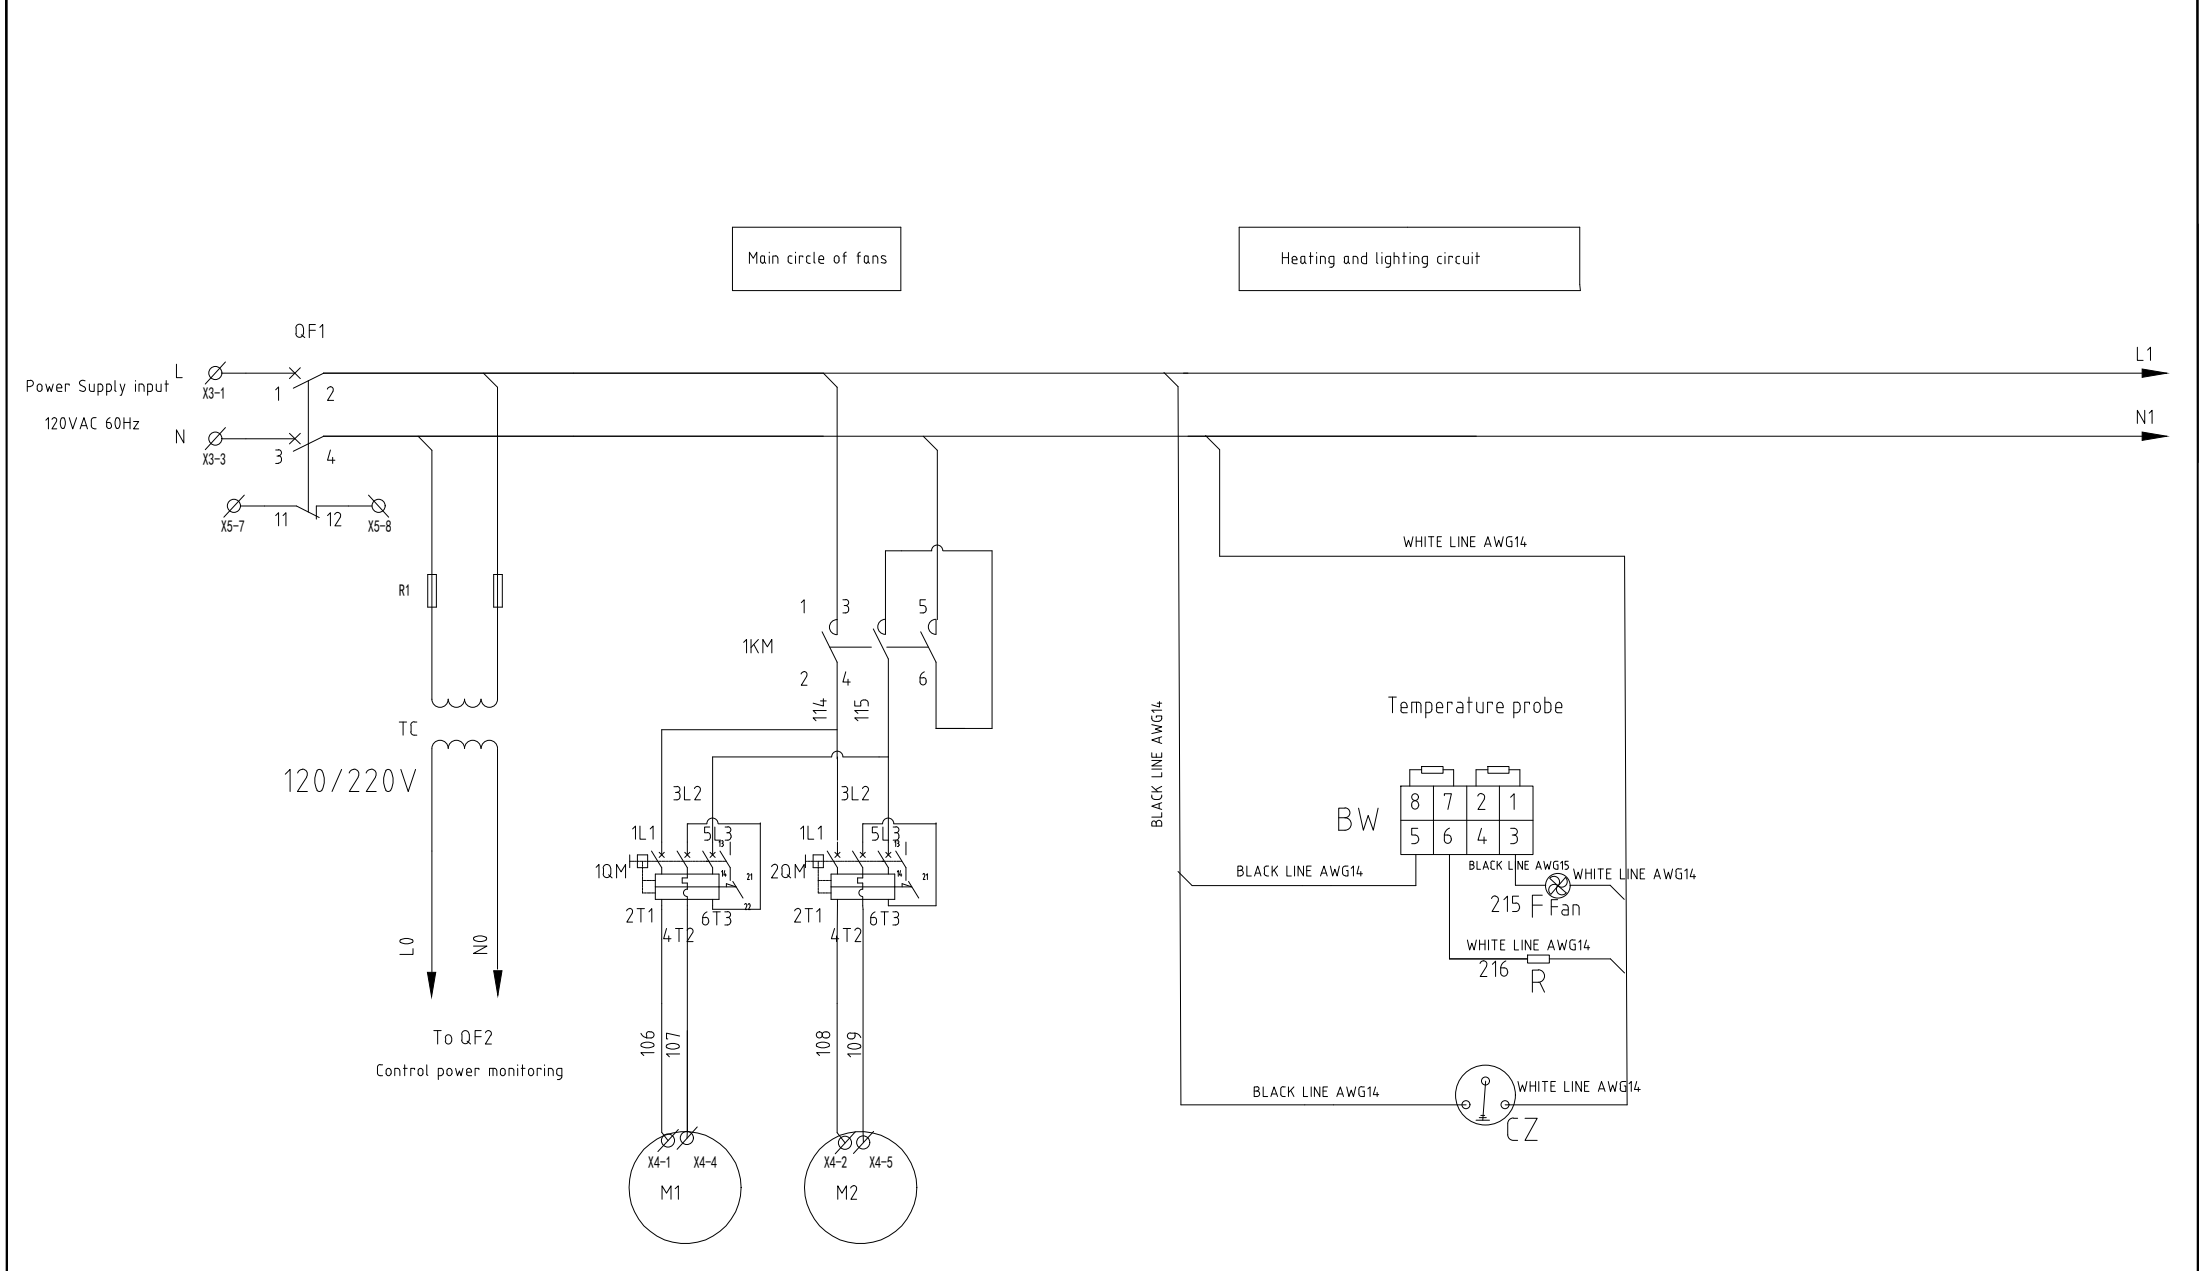

CHANGE	TYPE					DWG. NAME		
						General Assembly Drawing		
	DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1
						REV. NO.		
						0		

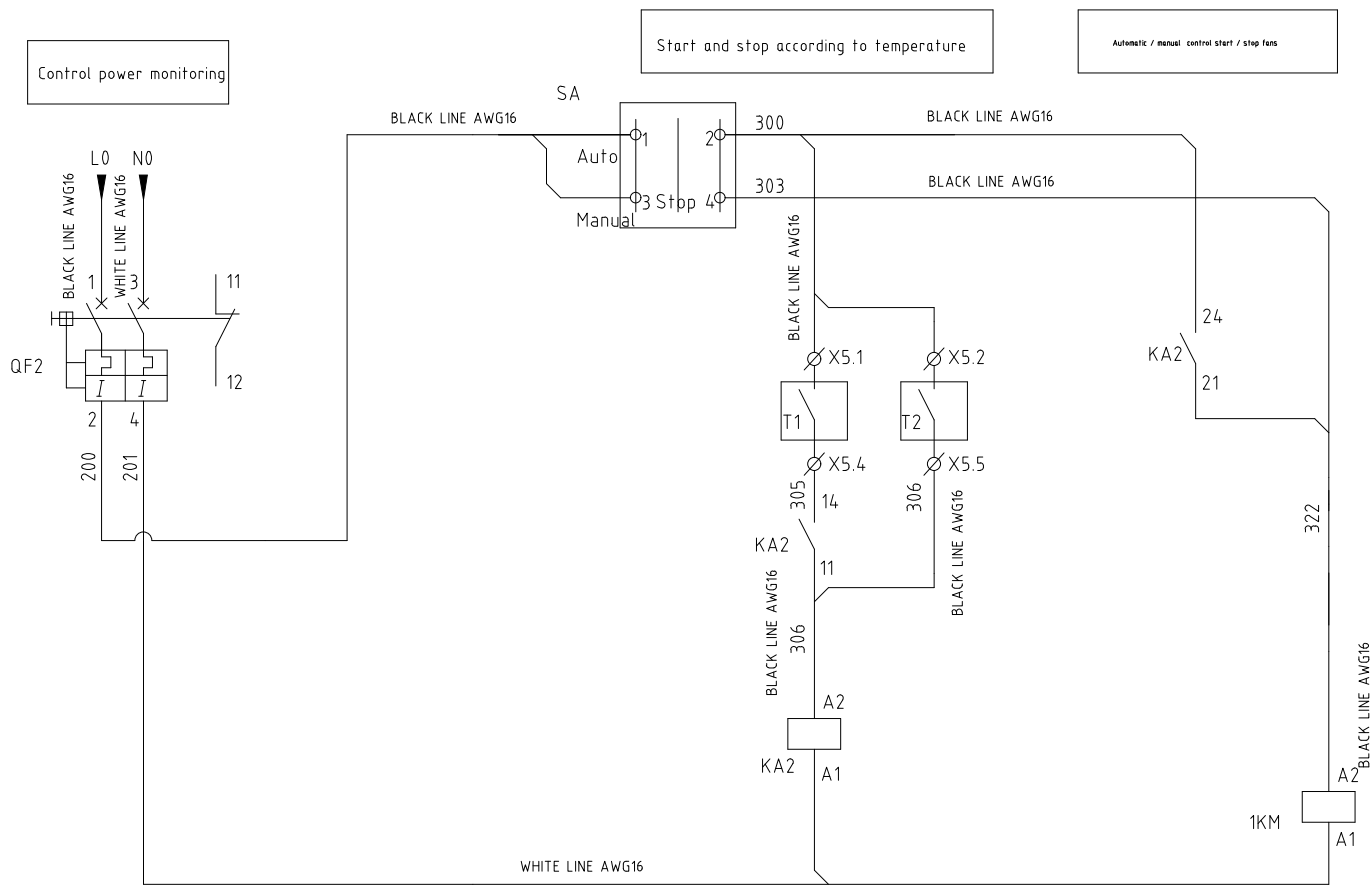

SATransfer switch转换开关

	Manual手动	Stop停止	Auto自动
Positioning feature	45°	0°	45°
Contact number	1--2		
	3--4		




Note:

T1 temperature signal is the fan signal of automatic stop working group;
T2 temperature signal is the fan signal of automatic starting working group;
Manually start the working group fan;

TYPE					DWG. NAME			
					General Assembly Drawing			
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1	
								REV. NO.
								0





CHANGE

Power supply, fan signal



TYPE					DWG. NAME			
					General Assembly Drawing			
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1	
								REV. NO.
								0

CHANGE

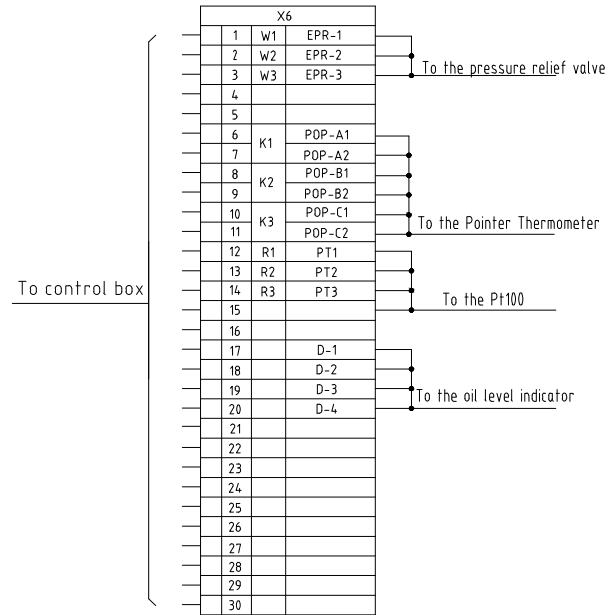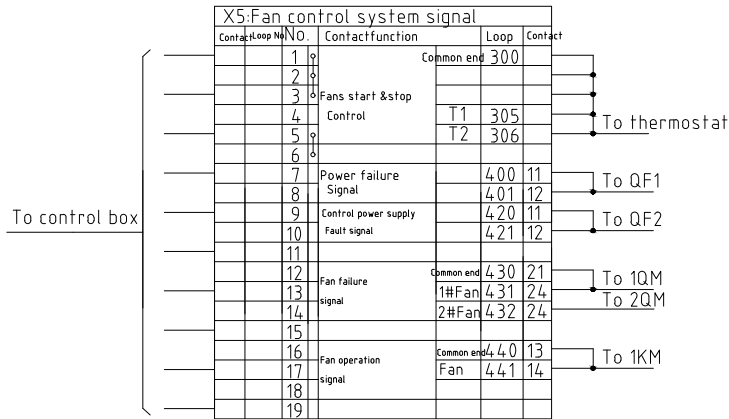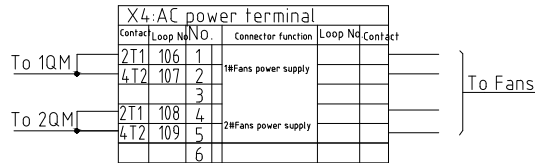

TYPE					DWG. NAME General Assembly Drawing			
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1	
					REV. NO. 0			

No.	Component code	Component name	Model	Qty	Brand品牌
1	QF1	AC air circuit breaker	OSMC65H2D50	1	Scheider
2	QF2	AC air circuit breaker	OSMC65H2D6	1	Scheider
3	SD	Auxiliary contact	A9A26924	2	Scheider
4	KA2	Intermediate relay	RXM4AB2F7	1	Scheider
5	1QM 2QM	Motor protection circuit breaker	GV2MP14	2	Scheider
6	BS	Humidity controller (Including humidity sensor)	3118.000 AC120V	1	WEITU
7	BC	Temperature controller (including temperature probe)	3110.000 AC120V	1	WEITU
8	1KM 2KM	AC contactor	LC1D50AM7 220V 60HZ	1	Scheider
9	R	Condensate load heater	DJR-S-50W	1	MENGYOU
10	SA	State transition switch (manual stop automatic)	XB4BD33	1	Scheider
11	CZ	RECEPTACLE	GFCI 120V	1	ZHONGTONG
12	CK	Respiratory net mask	FU9801 B P2+Rain cover	1	KAKU
13	F	Fan	Series 80 AC120 V	1	SUNTRONIX
14	X1	Terminal	UK5N	35	PHOENIX
15	X3	Terminal	UK10N	3	PHOENIX
16	X4	Terminal	UK5N	12	PHOENIX
17	X5	Terminal	UK2.5B	19	PHOENIX
18	R1	Fuse	FNQ-R-6	1	Bussmann
19	TC	control the transformer	DG-800VA	1	IN:AC120V OUT:AC220V
18					
19					
20					
21					
22					

CHANGE

TYPE					DWG. NAME General Assembly Drawing			
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1	
								REV. NO.

