GREECON
PLATFORM

Soil moisture pilot

Setup guide for the project manager

Products to buy, accounts to open and a step-by-step plan to take **one function** of Greecon Platform, soil moisture monitoring with alerts, from the office onto a real farm between October and December 2026.

Programme	Startup Albania 2026, phase F1 · activity A 2.2 “Pilot, test and validate the platform in real conditions”
Application	SA2026008101 · Greecon shpk · project ends **18 December 2026**
Prepared for	The project manager (budget line 1.1)
Technical lead	Eridon Manuka, CEO and systems engineer
Version	1.1 · 13 October 2026 · code in `greecontech/pilot`

Prices, plans and delivery times in this guide are estimates collected on 12 October 2026. They are marked “≈”. Confirm them before you pay.

How to use this guide

You do not need to be an engineer. Every step says **who** does it, **how long** it takes and **how you know it is done**. Do the phases in order; the first two run in parallel.

1	**The mission**	What we pilot, what already works, how success is measured	p. 2
2	**Plan and roles**	Ten-week timeline, deadlines, who does what	p. 3
A	**Products to buy**	Hardware, tools, subscriptions, budget scenarios	p. 5
B	**Step-by-step plan**	Phases 0 to 6, from decisions to the final report	p. 9
C	**Running the pilot**	Weekly check, weekly log, troubleshooting	p. 15
D	**Evaluation and reporting**	Success criteria, farmer interview, evidence	p. 17
E	**Appendices**	Accounts, variables, wiring, farmer card, commands, risks, sources	p. 18

Companion document: *Station build tutorial*, a hands-on guide for the person who builds and installs the station, from an empty desk to a working unit. This guide tells you *what* to do and *when*; the tutorial shows *how*.

1 · The mission

Startup Albania funds Greecon to prove the platform in real conditions. The platform can already monitor energy, water and agriculture sites. For the pilot we deliberately test **only one function**:

> **THE PILOT IN ONE SENTENCE**
>
> Measure soil moisture at a real farm, show it clearly, and **email the farmer when the soil becomes too dry**.

One function done reliably is stronger proof than many done half-way. It also gives the grant its evidence: real data, a real user, a measured result.

Success criteria (agreed in the pilot plan)

CRITERION	TARGET
Data availability	At least 95% of expected readings received (one reading every 10 minutes per sensor)
Alert correctness	Every drop below the agreed limit raises an alert, and there are no false alerts caused by faulty sensors
Usefulness	The farmer confirms that the alerts and the moisture trend helped decide when to irrigate
Stability	The station runs for 4 weeks without manual intervention

ALREADY DONE · CHECKED 12 OCT

- Platform builds and its 13 automated tests pass.
- A device key, ingestion, charts and alerts were run end to end against a real database.
- **Email alerts** in English and Albanian, plus a “station offline” email. New this month.
- The ESP32 station firmware compiles with the current toolchain.

NOT DONE · THIS IS YOUR WORK

- No hardware bought, no partner farm chosen.
- Email service account and domain verification.
- The firmware has **never run on a real board**. The bench test (step 3.4) is the first time.
- The dashboard is English only. The emails are bilingual.

How the pieces fit


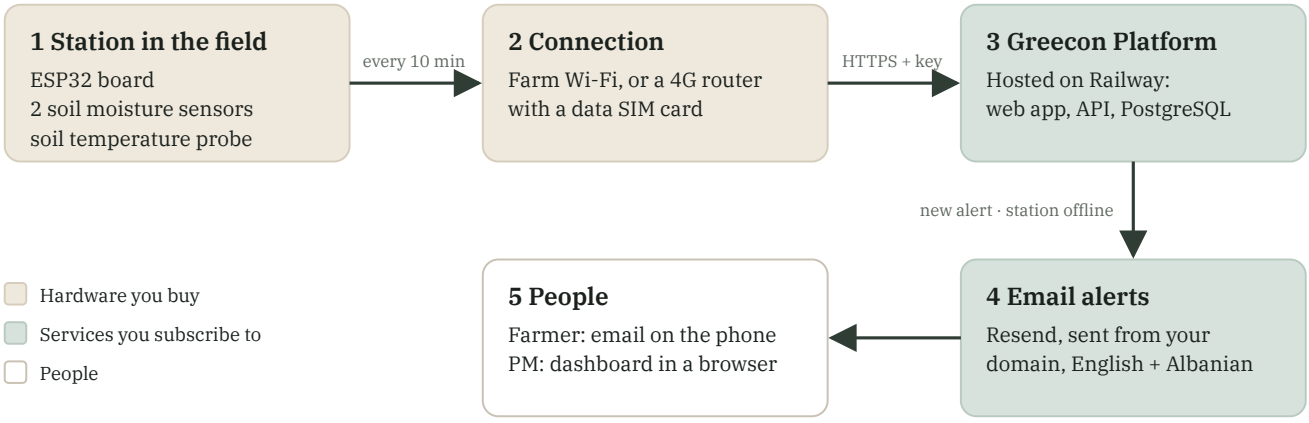


Figure 1. The station sends a reading every 10 minutes. The platform stores it, draws it, checks it against the limit and emails people when it crosses.

2 · Plan and roles

Today is Monday 12 October. The pilot window is November and December; the project ends **Friday 18 December**. The 4-week stability test needs a start date no later than 13 November, so the first four weeks decide everything.

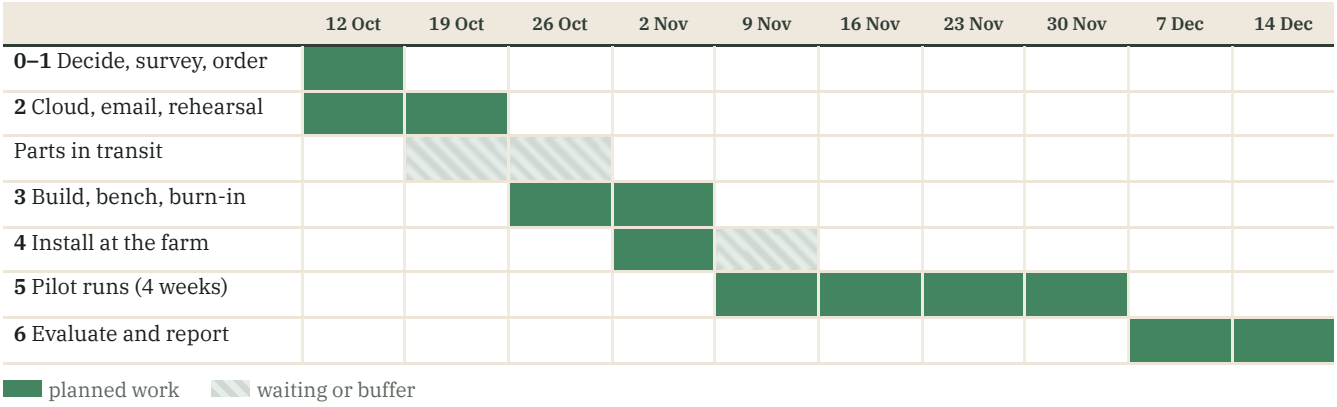

Deadlines and decision gates

DATE	MILESTONE	IF IT SLIPS
Wed 14 Oct	Hardware ordered with **express** shipping (sensors and boards)	Every day of delay moves the install by a day. Ordering is the critical path.
Fri 23 Oct	Cloud, email and rehearsal done. Parts in hand: target 23 Oct	**Gate A, Wed 28 Oct:** parts still missing → buy from a second supplier and tell Eridon.
Mon 2 Nov	Bench test and 72-hour burn-in passed	**Gate B:** failed → Eridon decides whether to fix it or swap in the spare board or sensor.
Fri 6 Nov	Station installed and sending. **The 4-week clock starts.**	**Gate C, Fri 13 Nov:** not installed → 4 weeks can no longer finish before 18 Dec. Tell Eridon and agree a shorter run.
Fri 4 Dec	4 weeks complete (if installed on 6 Nov)	Latest possible end: Fri 11 Dec (install on 13 Nov).
Fri 11 Dec **Fri 18 Dec**	Evaluation finished and results drafted for D5, D6, D7 · **project end**	–

Who does what

ROLE	PERSON	RESPONSIBLE FOR
PM	Project manager	Owns this plan: purchasing, the farmer relationship, accounts, the weekly check and log, the evaluation and the report.
TL	Eridon Manuka	Technical lead: platform, firmware, wiring, calibration, troubleshooting. Approves any change to the parts list.
Farmer	Partner farm contact	Hosts the station, answers alerts, gives 10 minutes of feedback a week.
Marketing	Mimoza Xhetani	Turns the result into a case study (activity A 2.1). Needs photos and a quote from the farmer.

THREE RULES

1. **Order first.** Shipping is the longest wait in the project. Cloud setup can happen while parts travel.
2. **Never send a key or password in chat, email or GitHub.** Use the password manager (Appendix 1). A key that leaks is replaced in one click, but only if you know it leaked.
3. **Hands off during the 4 weeks.** The stability test counts manual interventions. Fix real faults, write each one in the log, and change nothing else.

Part A · Products to buy

This is the list for **two stations and spares**: one station at the farm, one spare or second plot. Prices are ≈ estimates in euros before shipping; those from shop listings were read on 12–13 October.

A.1 Hardware

"Cart" says where to buy it: **1** Tirana Electronics (local), **2** DFRobot (abroad), **3** other local shops. Details in A.6.

ITEM	QTY	≈ € EACH	≈ € TOTAL	CART	
ESP32 DevKitC, ESP32-WROOM-32 The classic ESP32 on a ready-made board. Do not swap for S2, S3 or C3 boards: the firmware uses pins that differ. Listed locally at 1,200 lek.	3	8–12	24–36	1	required
DFRobot SEN0193 capacitive soil moisture sensor US$5.90 each, US$5.70 from 5 pieces. Chosen over cheap boards: the two-prong type sold locally corrodes in weeks, and the €2 "v1.2" clones often misbehave at 3.3 V.	6	5–6	30–36	2	required
Waterproof DS18B20 temperature probe, plus a 4.7 kΩ resistor DFRobot DFR0198 US$6.90, or kit KIT0021 US$7.50 with an adapter module and cable.	3	6–7	20–23	2	required
IP65 junction box ≈150×110×70 mm with 3–4 cable glands	2	10	20	3	required
USB data cable for flashing (not a charge-only cable) and a **5 V USB power adapter**	2+1	3–5	13	3	required
Heat-shrink tubing, jumper wires, solder, perfboard, silicone sealant, cable ties	1 lot	10–15	10–15	1, 3	required
Solar kit: 6 V 3–6 W panel, 18650 cell and holder, protected TP4056 charger, and a 5 V boost converter Instead of the USB adapter where there is no mains. A charger board alone cannot power the ESP32: Eridon designs and bench-tests the 5 V stage first (Build tutorial, section 9).	2	20–30	40–60	3	if no mains
4G router with a data SIM Teltonika RUT241 ≈ €148 net, ≈ €179 with VAT (Bechtle). A budget pocket 4G router such as the TP-Link M7200 costs less (≈ €40–80) but is less rugged outdoors.	1	40–180	40–180	3	if no Wi-Fi
SHT31 air temperature and humidity breakout (greenhouse)	2	5	10	2	optional

> **HOW MANY SENSORS, AND WHY**
>
> Each station has **two** moisture sensors: one at 10–20 cm, one at 20–40 cm. The shallow one reacts to irrigation first; the deeper one shows the reserve in the root zone. Six are listed because two are spares: cheap soil sensors fail more often than anything else on the station.

A.2 Tools

Borrow if the team has them, buy if not: a **multimeter** (≈ €15–25), a soldering iron with solder (≈ €15–30), a heat gun or lighter for heat-shrink, a drill with a step bit for the cable glands, small screwdrivers, a laptop with a USB port (Arduino IDE), a phone with a Wi-Fi analyzer app.

A.3 Services and subscriptions

SERVICE	WHAT FOR	≈ COST	NOTE
Railway, Hobby plan	Hosts the platform and its PostgreSQL database	US$5 a month with US$5 of usage included; usage beyond that is billed	Budget US$5–15 a month and check **Usage** weekly. Confirm at railway.com/pricing.
Resend, free plan	Sends the alert emails	€0: 3,000 emails a month, 100 a day, 1 domain	We expect a few emails a week. Railway blocks SMTP on Hobby, so Resend's web API is used.
Domain greecon.earth	Address `platform.greecon.earth` and the email sender	€0 (already owned)	Someone with access to its DNS settings must be available.
Mobile data SIM	Only with a 4G router	Ask the operator	The station sends under 1 MB a day (≈ 30 MB a month): the smallest plan is enough. Tourist SIMs expire after 2–3 weeks; get a company SIM with a monthly plan from Vodafone Albania or One Albania. Consumer prepaid plans quoted in travel blogs are ≈ 1,500–2,500 lek; business and IoT plans could not be found, so ask the operators' business desks.
Password manager	Keeps keys and passwords	≈ €0–5 a user	Bitwarden or 1Password. Turn on two-factor sign-in for Railway, GitHub and Resend.

A.4 Budget scenarios

SCENARIO	PARTS, ≈ €	+30% SHIPPING, COURIER AND IMPORT VAT	PLUS, NOT INCLUDED
A · Wi-Fi at the plot and mains power	117–143	**152–186**	≈ US$15–45 hosting
B · Wi-Fi at the plot, solar power	147–193	**191–251**	≈ US$15–45 hosting
C · Solar power and a 4G router	187–373	**243–485**	≈ US$15–45 hosting + SIM plan

Optional SHT31 sensors (≈ €10) and tools are not included. Hosting is three months of Railway. The +30% is a cautious allowance applied to everything; parts bought in Tirana (Cart 1) carry no import costs.

> **GRANT ELIGIBILITY: CONFIRM BEFORE YOU RELY ON IT**
> The application budget has no separate hardware line. The closest is **4.1 Technology development** ("development and optimisation of the platform, AI functions and technical performance"). Ask Startup Albania in writing whether pilot hardware, hosting and the SIM can be charged there. Keep every invoice in the name of **Greecon shpk** and file proof of payment with the grant documents.

A.5 Buying rules

- **Do not substitute** the board or the soil sensor without asking Eridon. The firmware reads the sensors on pins 34 and 35 and is calibrated for the SEN0193 type.
- **Slow shipping would cost the whole pilot.** Marketplace shipping from Asia to Albania often takes 2–5 weeks. Use express shipping for the sensors, and buy in Tirana whatever Tirana has.
- **Count and test on arrival.** Report a dead-on-arrival part within the supplier's return window.
- **Invoices in the name of Greecon shpk** for everything, local or foreign (see the grant note above).

A.6 Where to buy: three carts

No single shop sells everything. The parts split naturally into what Tirana has, what must come from abroad, and what you must find locally. Shop pages were read on 13 October; listings can be out of date, so **confirm stock and price by phone or WhatsApp before you travel or pay**.

Cart 1 · Tirana Electronics (tiranaelectronics.al) · buy this week

> **Address** Rruga Myslym Shyri, Tirana · **Phone and WhatsApp** +355 68 263 5962 · **Email** info@tiranaelectronics.al
> **Delivery** all of Albania. Tirana within 12 hours of order processing, 200 lek up to 2 kg. Other cities 2–3 working days, 300 lek up to 2 kg, +50 lek per extra kg. The shop says it takes no responsibility once the parcel leaves its warehouse: inspect on receipt.

ITEM AS LISTED	QTY	LISTED, LEK	NOTE
ESP32 ESP32D ESP32-WROOM-32D "Development Board"	3	1,200	The listing has no photo and does not mention a USB socket. **Ask for a photo** and confirm it is a ready-made board with a USB port and pin headers, like an ESP32 DevKit. Alternative: *ESP32 Basic Starter Kit*, 3,500 lek (board, breadboard, wires, USB cable).
Heat-shrink tubing	1	600	To seal the sensor electronics.
DuPont jumper cables, 40-pin (M/F, M/M, F/F)	3 sets	12 each	For the bench build.
Solder wire SOLDEX 0.75 mm, 200 g	1	1,800 / 2,160	The page shows two prices without saying which applies.
Pro'sKit SI-131G soldering iron	1	2,500	Only if the team has none.
Digital meter	1	–	Ask for a simple multimeter. The only meter listed is a clamp meter (Pro'sKit MT-3202, 3,500 lek).

> **DO NOT BUY THE SHOP'S "SOIL MOISTURE SENSOR MODULE", 300 LEK**
> It is a 60×30 mm probe on an LM393 comparator board, the classic two-prong type. The exposed metal corrodes in wet soil within weeks, and the readings drift long before it fails. The pilot needs the capacitive sensor in Cart 2.

Not found on the pages I could read: capacitive soil sensors, DS18B20 probes, SHT31, junction boxes, cable glands, resistors, perfboard, solar parts, 4G routers. I read the three pages of the electronic-components category and the first page of its sensor and module categories.

Cart 2 · DFRobot (dfrobot.com) · order by Wed 14 Oct

ITEM	SKU	QTY	PRICE
Gravity: Analog Capacitive Corrosion Resistant Soil Moisture Sensor 3.3–5.5 V supply, 1.2–2.5 V output, PH2.0-3P connector with cable.	SEN0193	6	US$5.90 each; $5.80 from 3, $5.70 from 5, $5.50 from 10
Waterproof DS18B20 temperature sensor, stainless steel probe 6×35 mm, 90 cm cable Sensor only, or the kit with an adapter module and cable. The page does not state the resistor value in the kit: keep a 4.7 kΩ resistor to follow the wiring table.	DFR0198 or KIT0021	3	US$6.90 sensor only; US$7.50 kit

Subtotal about **US$55–60** before shipping. DFRobot ships by DHL and FedEx and quotes 3–7 business days to Eastern Europe, free shipping only above US$150. **Its shipping page does not name Albania**, and terms are FOB Shanghai: you pay all import duty, taxes and courier fees. Email `store@dfrobot.com` before paying:

```
Subject: Delivery to Tirana, Albania, company order
Hello, we are Greecon shpk, a company in Tirana, Albania. Do you ship to Albania
by DHL or FedEx? Please quote shipping cost and delivery time for 6 x SEN0193
and 3 x DFR0198, and send a pro-forma invoice in the company's name.
```

Backups if DFRobot cannot ship: DigiKey, Mouser and Farnell/element14 stock the same DFRobot parts. For example, Mouser's Austrian site lists the DFR0198 at about €5.93, and the ESP32-DevKitC-32E is listed at about £7.67 (DigiKey UK) and €8.77 (Mouser France). I could not load their shipping pages: enter the Tirana address in the cart to see whether and how they deliver. AliExpress delivers to Albania but economy shipping takes about 15–35 days: use it for spares only.

Cart 3 · Other local shops · enquire this week (not verified)

ITEM	WHERE TO ASK
IP65 junction box ≈150×110×70 mm and PG7/PG9 cable glands	An electrical wholesaler ("materiale elektrike"). Bring the dimensions.
4.7 kΩ resistors, perfboard	Ask Tirana Electronics: neither appeared on the pages I read. Or any electronics components shop.
5 V USB adapters and a data cable; silicone sealant; cable ties	A phone-accessory shop and a hardware shop.
4G router and SIM, only if the plot has no Wi-Fi	The business desks of Vodafone Albania and One Albania. Or order the Teltonika RUT241 from abroad (≈ €148 net).
Solar panel 6 V 3–6 W, 18650 cell, protected TP4056 board, and a boost converter that accepts at least 3 V in and gives 5 V out	A local solar or electronics shop. Only after Eridon has approved the solar design: not every boost module starts from one lithium cell.

> **IMPORTING AS A COMPANY IS NOT THE SAME AS SHOPPING AS A PRIVATE PERSON**
>
> The official Albanian customs site (dogana.gov.al) exempts internet purchases delivered by postal consignment up to **€22** (gifts between individuals up to €45), but only for **non-commercial** consignments. It does not say how company imports are treated. Plan for a **commercial import**: a customs declaration, 20% VAT and possibly duty, handled by the courier's customs broker.
>
> - Put the order in the company's name and give the courier the company's NIPT.
> - Keep the invoice, the customs declaration and the courier's receipt together for the grant file.
> - Ask the accountant how VAT is treated before you order.
> - Send everything from abroad in **one parcel**, so you clear customs once.

Part B · Step-by-step plan

PM = project manager · TL = technical lead (Eridon) · Time = effort, not waiting time. Tick each step when its "Done when" is true.

0 Decide and agree

Mon 12 – Wed 14 Oct

Everyone knows the scope, the farm and the owner of each step.

#	WHAT TO DO	WHO	TIME	DONE WHEN
0.1	☐ Read this guide. Meet Eridon for 30 minutes: confirm the pilot is **one function** (soil moisture and alerts) and who owns each phase. *Out of scope:* the energy and water modules, automatic irrigation control, more than one farm.	PM, TL	1 h	Scope and owners are written at the top of the weekly log.
0.2	☐ **Choose the partner farm and plot.** Good candidates: irrigated crops or a greenhouse, a farmer who will give 10 minutes of feedback every week, a plot reachable by car, and mains power or open sun.	PM	1–3 days	A named farmer and a named plot.
0.3	☐ **Get the farmer's agreement in writing** (an email is enough): permission to install, access for visits, weekly feedback, and permission to use anonymous results and, if they agree, photos and their name in a case study.	PM	1 day	A written "yes" is saved in the project folder.
0.4	☐ **Ask Startup Albania in writing** whether pilot hardware, hosting and the data SIM can be charged to budget line 4.1, and which proofs they need. Do not wait for the answer to order the sensors; keep invoices in Greecon shpk's name.	PM	30 min	The question is sent. The answer is filed when it arrives.

1 Survey the plot and order

Tue 13 – Wed 14 Oct · hardware in hand by Fri 23 Oct (latest Wed 28 Oct)

The right parts for this plot are on their way, and delivery is tracked.

#	WHAT TO DO	WHO	TIME	DONE WHEN
1.1	☐ **Survey the exact spot** (a phone call with the farmer can replace a visit). Wi-Fi: is there signal at the station's spot, stronger than −75 dBm on a Wi-Fi analyzer app? Power: a mains socket within reach, or a sunny, unshaded place for a panel? Where does the irrigation spray reach? Is the spot safe from animals and machinery?	PM	2 h	Answers written down. Scenario A, B or C chosen (A.4).
1.2	☐ **Place the three carts in A.6.** Cart 1: call or WhatsApp Tirana Electronics and ask for a photo of the ESP32 board. Cart 2: email DFRobot first (the template is in A.6), then order the sensors in one parcel with express shipping. Cart 3: start the enquiries.	PM	3 h	Cart 1 collected or ordered. Cart 2 ordered. Cart 3 shops identified. Eridon has approved the list.
1.3	☐ If a 4G router is needed, **ask the business desks** of Vodafone Albania and One Albania for a router and a data plan in the company's name, and buy the one that covers the plot best.	PM	2 h	SIM active; the plan cost is noted.
1.4	☐ Put every order in a tracker with its expected date. Chase on **Mon 19 Oct** and **Mon 26 Oct**. Count everything on arrival.	PM	15 min a week	All parts received, counted and working. (Gate A: Wed 28 Oct.)

2 Cloud, email and rehearsal

Mon 12 – Fri 23 Oct · runs while the parts travel

The platform is live on the internet and email alerts are proven. Nothing here needs hardware.

#	WHAT TO DO	WHO	TIME	DONE WHEN
2.1	☐ Ask Eridon **whether the platform is already deployed** on Railway. If it is, reuse it: skip to 2.5, and set `SEED_DEMO` and `SIMULATOR` to `false`, then delete the demo sites under *Sites & sources*.	PM	10 min	Decision noted.
2.2	☐ **Open a Railway account** with the company email. Add a payment card, choose the **Hobby** plan and turn on two-factor sign-in.	PM	30 min	You can create a project.
2.3	☐ In Railway choose *New Project → Deploy from GitHub repo* and select the Greecon Platform repository. Then *+ New → Database → PostgreSQL* in the same project. Railway builds the `Dockerfile` by itself.	PM, TL	30 min	The app service builds without errors.
2.4	☐ On the app service, set the **variables in Appendix 2**. For `SESSION_SECRET`, let the password manager generate 40+ random characters. Use a strong `ADMIN_PASSWORD`.	PM	30 min	The deployment turns green.
2.5	☐ *Settings → Networking → Generate Domain.* Open `https://<your-domain>/api/health`: it must show `"status":"ok"`. Sign in as the administrator and **change the password** under *Account*.	PM	15 min	Health check is ok. Admin password changed and saved.
2.6	☐ *Recommended:* add the custom domain `platform.greecon.earth`. Railway shows a DNS record; the person who manages the DNS of greecon.earth creates it. Then set `APP_URL` to the new address.	PM, DNS owner	1 h + wait	The platform opens on platform.greecon.earth with a padlock.
2.7	☐ **Resend:** create an account at resend.com, add the domain `greecon.earth`, create the DNS records it lists and press *Verify*. Create an API key with sending access.	PM, DNS owner	1 h + up to a day	The domain shows “Verified”.
2.8	☐ In Railway set `RESEND_API_KEY` and `ALERT_EMAIL_FROM` and redeploy. In the platform open *Settings & audit → Alert emails*, enter the recipients, press *Save recipients* and then *Send test email* (Figure 2).	PM	20 min	The test email arrives in **every** recipient’s inbox. Check spam too.
2.9	☐ *Users & roles → Create user.* Administrators: Eridon and the PM. **Operator**: the farmer (can acknowledge alerts, cannot change settings).	PM	15 min	Each person has signed in once.
2.10	☐ **Rehearse the whole chain with no hardware.** *Sites & sources:* add the site “Pilot farm” (sector Agriculture) and a **Device** source called “Rehearsal”; copy its key. Run the emulator (Appendix 5). Then set **Lower limit 28** on *Soil moisture 1* and *2* (Figure 3) and run it again with `--dry`.	PM, TL	1 h	An alert shows on the dashboard. **One** email arrives for both sensors. A normal reading closes the alert.

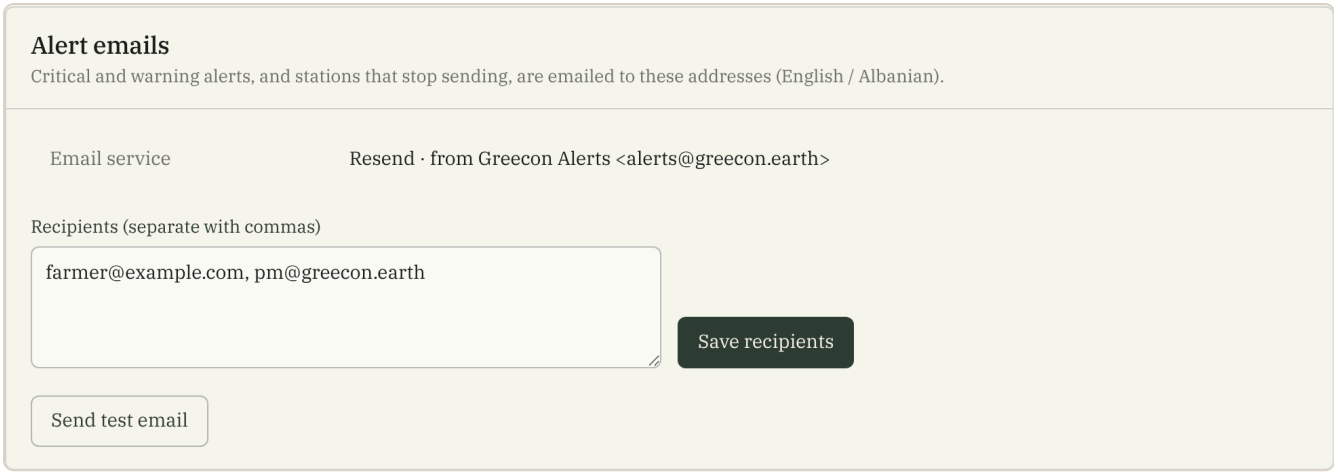


Figure 2. *Settings & audit → Alert emails.* The service line must show the sender address. Save the recipients, then send a test email. (Example data.)



Figure 3. *Sites & sources.* A metric appears after the first upload. Click *Edit* on it to set the lower limit. (Example data.)

3 Build the stations and bench test

When the parts arrive (target 23 Oct, latest 28 Oct) – Mon 2 Nov

Each station works on a table for 72 hours before it goes near a field. This is the first time the firmware runs on a real board.

#	WHAT TO DO	WHO	TIME	DONE WHEN
3.1	☐ Unpack and check against the order. Plug each board into a computer: a serial port must appear. Touch-test each sensor and probe.	TL, PM	1 h	Parts list ticked, spares set aside.

#	WHAT TO DO	WHO	TIME	DONE WHEN
3.2	☐ Install the Arduino IDE 2. *Boards Manager:* `esp32 by Espressif Systems` **3.3.12**. *Library Manager:* OneWire **2.3.8**, DallasTemperature **4.0.6**, Adafruit SHT31 Library **2.2.2** (it adds Adafruit BusIO). These exact versions compiled the firmware on 12 Oct. **Follow the Build tutorial** (a separate PDF) for every click.	TL	1 h	The sketch compiles.
3.3	☐ Wire each station as in **Appendix 3**, **soldered on perfboard** (a breadboard shakes loose in a field). Seal the top of each soil sensor's electronics with heat-shrink or sealant.	TL	3 h a station	Wiring checked against the table by a second person.
3.4	☐ Copy `config.example.h` to `config.h`. Enter the Wi-Fi name and password, `API_URL` (platform address + `/api/ingest`) and the **Rehearsal** key. Upload. Open *Serial Monitor* at 115200 baud: you should see the readings and `POST 201`.	TL	1 h	Readings from the real board appear on the platform. **Write down anything unexpected.**
3.5	☐ **Calibrate each moisture sensor.** Hold it in dry air and note `soil_moisture_1_raw` on the platform (DRY). Stand it in a glass of water up to the white line (WET). Enter both in `config.h` and upload again.	TL	1 h	Air reads about 0%, water about 100%.
3.6	☐ **Burn-in:** leave each station running for **72 hours**, indoors. If the farm will use a 4G router, set it up at the office first (its Wi-Fi name and password as in `config.h`) and burn in against it, so nothing needs re-flashing at the farm.	TL	3 days of waiting	At least **410 of 432** expected readings per metric (95%), and the source shows online. (Gate B: Mon 2 Nov.)
3.7	☐ **Delete the Rehearsal source** (*Sites & sources → Delete*) so test data does not pollute the pilot. Add one source per station, "Station 1" and "Station 2", each with **its own key**. Put each key into its station's `config.h`, upload, and store the key in the password manager.	PM, TL	1 h	Pilot data starts clean. A lost or leaked key can be replaced per station.
3.8	☐ Mount each board in its IP65 box with the cable glands facing down. Label it with the station name and the PM's phone number. Pack the kit: laptop, USB cable, multimeter, cable ties, tape, sealant, spare sensors and board, a phone with a hotspot.	TL, PM	2 h	Kit packed and ticked.

4 Install at the farm

Target Tue 3 – Fri 6 Nov · latest Fri 13 Nov (Gate C)

The station is sending reliably, the farmer has the alert emails, and the 4-week clock is running.

#	WHAT TO DO	WHO	TIME	DONE WHEN
4.1	☐ Go to the plot with Eridon (or a technician) and, if possible, the farmer. Fix the box **in the shade, above the irrigation spray**, cable glands facing down. Plug it in, or fix the solar panel facing south with no shade.	TL, PM	1 h	The station powers on.
4.2	☐ **Place the sensors in the root zone:** one at 10–20 cm, one at 20–40 cm (or in two spots). Push each in up to the **white line** with firm contact and no air gaps. Keep the electronics above the soil. Loop each cable downward so water cannot run into the box.	TL	30 min	Sensors stand firm and straight.

#	WHAT TO DO	WHO	TIME	DONE WHEN
4.3	☐ Wait 15 minutes. On the platform, *Sites & sources* must say “last data just now”. Check the **Wi-Fi signal** metric: it must be above **–80 dBm**. If not, move the router or station, or add an extender, before you leave.	TL, PM	20 min	Readings arrive. Signal is above –80 dBm.
4.4	☐ **Agree the lower limit with the farmer.** Start at 25–30% (we suggest 28%) and enter it on both moisture metrics. Ask: “When do you irrigate today, and how do you decide?” Write the answer in the log.	PM, farmer	20 min	Limits saved. The farmer’s current practice is recorded.
4.5	☐ Show the farmer the dashboard, the alert email (Figure 4) and the *Acknowledge* button. Hand over the **farmer card** (Appendix 4) with the PM’s phone number. Confirm the test email arrived on the phone the farmer actually uses.	PM	30 min	The farmer has received a test email on their phone.
4.6	☐ Take photos of the station, the sensor placement and the plot. Write **“Pilot start”** and the date in the weekly log. This starts the 4-week clock.	PM	15 min	Log entry made. Photos filed.

From: Greecon Alerts <alerts@greecon.earth>
To: farmer@example.com
[Greecon] CRITICAL · 2 alerts — Pilot farm (example)

Critical alert / Alarm kritik: 2 alerts / alarme

Site / Vendi	**Pilot farm (example)**
Soil moisture 1	**24.8 % (limit / kufiri 28 %)**
Soil moisture 2	**27.1 % (limit / kufiri 28 %)**
Time / Koha	**12 Nov 2026, 06:10**

Open alerts / Hap alarmet

Greecon Platform

Figure 4. The email the farmer receives when two sensors cross their limit together. One message, English and Albanian, with a link to the alerts. (Example data.)

5 Run the pilot

Four weeks from the install day (6 Nov → 4 Dec)

Collect clean evidence. Keep the routine small and regular; do not tinker.

#	WHAT TO DO	WHO	TIME	DONE WHEN
5.1	☐ **Every Monday** do the weekly check (Part C) and add one line to the weekly log.	PM	30 min a week	The log has a line for every week.
5.2	☐ **Every week** call the farmer for 10 minutes: Which alerts came? What did you do? Any false alarm? Any dry spell without an alert?	PM	10 min a week	Feedback noted next to the week’s log line.
5.3	☐ **Every Friday** export the readings: *Data → Export CSV*. Save the file in the shared project folder. This is your backup.	PM	10 min a week	A dated file is saved.
5.4	☐ **Do not touch** the station or the settings unless something is broken. Write every manual fix in the log with the date and the reason.	All	–	Interventions are listed. Zero is the target.

#	WHAT TO DO	WHO	TIME	DONE WHEN
5.5	☐ On a **“Station offline”** email, phone the farmer first (power? router?) and use the troubleshooting table in Part C. Visit the plot only if it stays offline for more than 24 hours.	PM, TL	as needed	Back online, or a visit is booked.

6 Evaluate and report

Mon 7 – Fri 18 Dec · evaluation finished by Fri 11 Dec

Turn four weeks of data into proof that Startup Albania can read in five minutes.

#	WHAT TO DO	WHO	TIME	DONE WHEN
6.1	☐ Calculate the four success criteria as shown in **Part D**.	PM	2 h	The results table is filled in.
6.2	☐ Interview the farmer (questions in Part D).	PM	30 min	Answers are written down, with quotes.
6.3	☐ Collect the evidence: monitoring screenshots, the alert list, the CSV exports, the weekly log, the photos.	PM	1 h	One evidence folder exists.
6.4	☐ Write the pilot results with Eridon for **D5, D6 and D7**. Confirm the submission dates with Startup Albania (D1 and D2 were delivered on 9 Sep 2026).	PM, TL	2 days	Drafts reviewed by Eridon.
6.5	☐ Give Marketing the photos and the farmer’s quote for the case study (A 2.1). Agree with the farmer what happens to the station after 18 Dec: keep it running or remove it.	PM	1 h	The decision is recorded.

Part C · Running the pilot

C.1 The Monday check (30 minutes)

CHECK	WHERE TO LOOK	HEALTHY LOOKS LIKE
☐ **Station online**	*Sites & sources*, "last data"	Less than 30 minutes ago
☐ **Data availability**	*Monitoring → 7 days*, "readings in period" on each moisture metric	At least **958 of 1,008** (95%)
☐ **Signal**	*Dashboard*, metric "Wi-Fi signal"	Above −80 dBm
☐ **Curves look real**	*Monitoring* charts (Figure 5)	A smooth fall as the soil dries, a jump after irrigation. Not flat, not stuck at 0% or 100%, no spikes.
☐ **Alerts match reality**	*Alerts → All*, then the farmer	Every dry period has an alert. Every alert has a real cause.
☐ **Email reaches the farmer**	Ask the farmer	"Yes, I got it"
☐ **Hosting**	Railway → *Usage*; `/api/health`	Within budget. Status ok.
☐ **Backup** (Fridays)	*Data → Export CSV*	Dated file saved

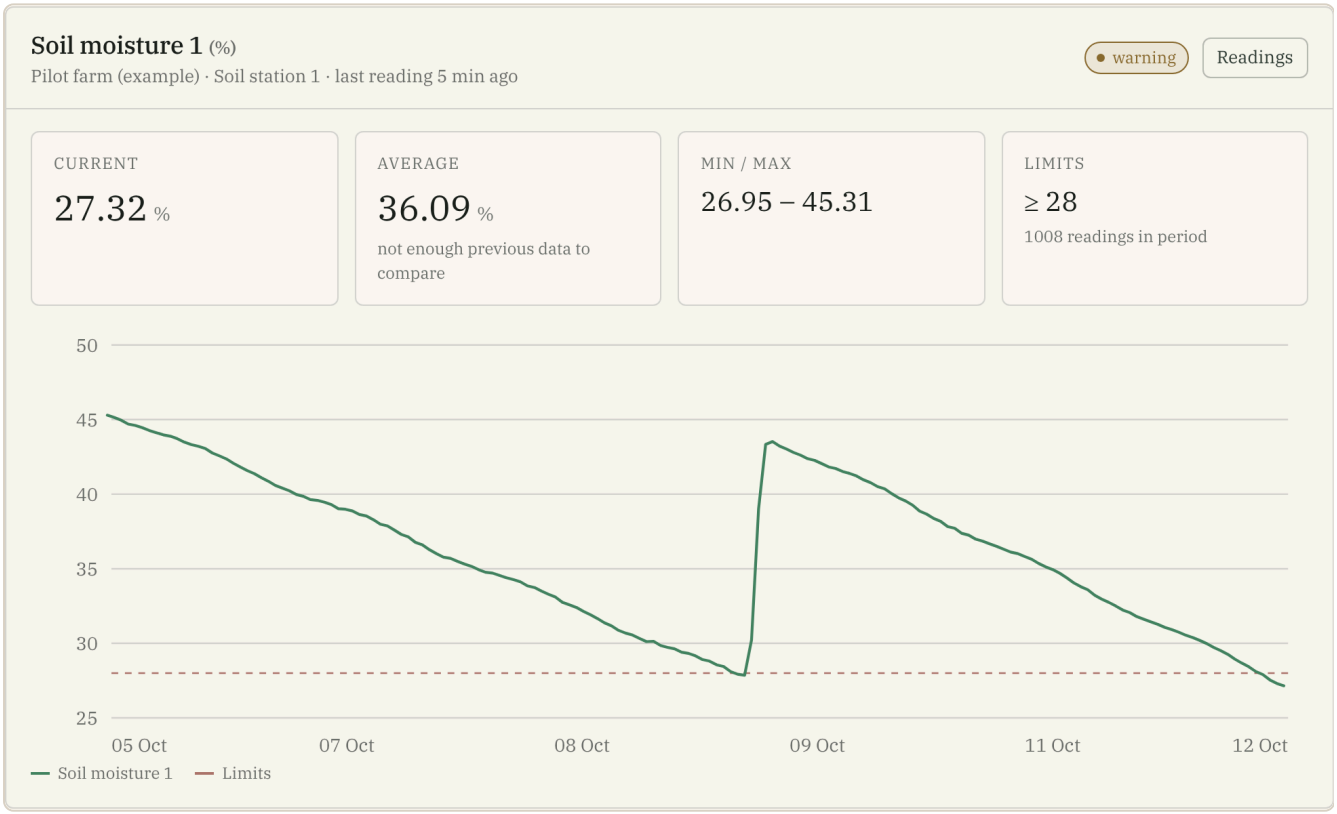


Figure 5. What a healthy sensor looks like on *Monitoring → 7 days*: a slow fall, a limit line at 28%, an irrigation jump, and a new warning as the soil dries again. **Illustrative data, not a real farm.**

C.2 Weekly log (copy this table)

WEEK	DATE	READINGS (OF 1,008)	ALERTS	FARMER ACTED?	MANUAL FIXES	NOTES
1						
2						
3						
4						

C.3 When something goes wrong

SYMPTOM	LIKELY CAUSE AND WHAT TO DO
"Station offline" email, or no data	Phone the farmer: is the box powered (LED, adapter, solar battery)? Did the router restart or the Wi-Fi password change? Has the SIM run out of data? On the platform, *Sites & sources* shows when data last arrived.
Moisture stuck at 0% or 100%	Calibration values swapped or wrong, or a faulty sensor. Compare the `_raw` metrics. Eridon recalibrates or swaps in a spare.
Soil temperature missing	The 4.7 kΩ resistor is missing or the probe is wired wrongly.
Serial Monitor: `POST 401`	Wrong or replaced API key. *POST 403*: the source was deactivated. Check *Sites & sources*.
No alert in a dry spell	No lower limit set on that metric, or it is set too low. Open *Sites & sources → Edit* on the metric. Test with the emulator's `--dry` option on a rehearsal source, never on the pilot station.
Alert but no email	*Settings & audit* shows "not configured": the Resend variables are missing. Press *Send test email*. Check the farmer's spam folder. Remember the cooldown: the same metric is emailed at most once every 6 hours. Look at the Resend dashboard's sending log.
Too many alerts	The limit is set too high for this crop or soil. Agree a new limit with the farmer, change it once, and write the change in the log.
The platform does not open	Check `/api/health`. In Railway read the deployment logs and press *Restart*. Phone Eridon if it does not recover in 15 minutes.
A key or password leaked	Generate a new key under *Sites & sources → New API key* (the old one stops working at once), update the station, and note it in the log. Change leaked passwords under *Account*.

> **BE HONEST WITH THE FARMER**
> This is a pilot. The sensors and the firmware are being proven. Tell the farmer to keep checking the soil by hand and not to rely on the alerts alone. The decision to irrigate remains theirs.

Part D · Evaluation and reporting

D.1 Calculate the four criteria

CRITERION	HOW TO MEASURE	PASS
Data availability	*Monitoring → From / To* (install day to today). Read "readings in period" for `soil_moisture_1` and `_2`. Expected = days × 144.	≥ 95%. For 28 days: expected 4,032, so at least **3,830**.
Alert correctness	*Alerts → All.* Lay every alert against the chart. Count (a) dry periods under the limit with no alert and (b) alerts with no real cause, such as a faulty sensor.	(a) = 0 and (b) = 0.
Usefulness	The farmer interview below.	The farmer says the alerts or the trend helped them decide when to irrigate.
Stability	The weekly log: number of manual interventions in 4 weeks.	4 weeks running with none.

D.2 Farmer interview (30 minutes)

1. Did the alerts arrive when you needed them? Was any alert late or missing?
2. Did you irrigate, or change when you irrigate, because of an alert or the chart? Give an example.
3. Were there alerts you did not understand or did not trust? Why?
4. Which did you use more: the email, or the dashboard? What would you remove or add?
5. Did the system save you time, water or a visit to the plot? Roughly how much?
6. Would you keep using it after the pilot? What would you pay for it each month? (Greecon's model sells setup plus a monthly subscription; this answer tests it.)

D.3 Evidence folder

- ☐ Monitoring screenshots (7 days and the whole pilot) for each moisture metric, with the limit line visible
- ☐ The alert list with the farmer's comment next to each
- ☐ CSV exports (weekly backups and the final one)
- ☐ The weekly log, the interventions list and the interview notes
- ☐ Photos of the station and sensor placement; the farmer's written agreement
- ☐ Invoices and proofs of payment in the name of Greecon shpk

D.4 What goes into the deliverables

TOR	DELIVERABLE	PILOT INPUT
D5	Functional and technical testing, and documentation of problems and improvements (month 4)	The weekly log, the interventions list, every issue found and how it was fixed
D6	Functional version of the platform, ready for testing, demonstration and piloting (month 5)	The platform address, the four criteria results, screenshots
D7	Summary report on technology development, features built and improvements (month 5)	This pilot as the validation chapter: results, farmer feedback, lessons, next steps

Appendix 1 · Accounts and secrets

ACCOUNT	USED FOR	OWNER	KEEP IN THE PASSWORD MANAGER
Railway	Hosting and database	PM (company email)	Login, 2FA recovery codes
Resend	Alert emails	PM	Login, `RESEND_API_KEY`
DNS provider of greecon.earth	Platform address, email records	Whoever manages the domain	Not held by the PM; only the records are exchanged
GitHub	The platform code	Eridon	–
Platform administrators	Settings, users, sources	Eridon, PM	Each person's own password
Station keys	Each station's uploads	PM, TL	One key per station. Shown **only once** when created.
4G router and SIM	Connectivity at the plot	PM	Router admin password, SIM PIN and PUK
Operator account	The farmer's sign-in	Farmer	The farmer sets their own password

RULES

- One person, one account. No shared passwords.
- Keys and passwords never go into chat, email, documents or GitHub.
- Turn on two-factor sign-in on Railway, GitHub and Resend.
- If a key might have leaked, replace it at once (*Sites & sources → New API key*).

Appendix 2 · Railway variables

Set these on the app service under *Variables*. The platform runs its database migrations on every start.

VARIABLE	VALUE	REQUIRED
`DATABASE_URL`	`${{Postgres.DATABASE_URL}}`, a reference to the Postgres service	yes
`SESSION_SECRET`	40+ random characters. Without it, everyone is signed out on every restart.	yes
`ADMIN_EMAIL`, `ADMIN_PASSWORD`, `ADMIN_NAME`	The first administrator, created on the first start only	yes
`SEED_DEMO`, `SIMULATOR`	`false` for the pilot (demo data and simulated readings off)	yes
`PROJECT_START_DATE`	`2026-08-01` (month 1 is August 2026)	yes
`APP_TIMEZONE`	`Europe/Tirane`	yes
`RESEND_API_KEY`	From the Resend dashboard. Without it, no email is sent.	for email
`ALERT_EMAIL_FROM`	`Greecon Alerts <alerts@greecon.earth>`, on the verified domain	for email
`ALERT_EMAIL_TO`	Initial recipients, comma-separated. Change them later under *Settings & audit*.	optional

VARIABLE	VALUE	REQUIRED
`APP_URL`	`https://platform.greecon.earth`, used for the links in emails	optional
`ALERT_EMAIL_COOLDOWN_HOURS`	Default 6: a metric is emailed at most once in this time	optional
`OFFLINE_AFTER_MINUTES`	Default 90: silence before the “station offline” email	optional

Appendix 3 · Station wiring

FROM	TO THE ESP32
Soil sensor 1: VCC · GND · AOUT	GPIO25 · GND · **GPIO34**
Soil sensor 2: VCC · GND · AOUT	GPIO25 · GND · **GPIO35**
DS18B20: red · black · yellow (data)	GPIO25 · GND · **GPIO4**, with the 4.7 kΩ resistor between data and 3.3 V
SHT31 (optional): VIN · GND · SDA · SCL	3.3 V · GND · GPIO21 · GPIO22

- **GPIO25 powers the sensors only while the station measures.** That saves energy and slows corrosion.
- The moisture sensors **must** use GPIO34 and GPIO35: they are ADC1 pins. ADC2 pins stop working while Wi-Fi is on.
- The station wakes every 10 minutes, measures, uploads and sleeps again. It sends under 1 MB a day.

Appendix 4 · Farmer card

Print one copy for the farmer. **Have a native Albanian speaker review the wording before you hand it out**, and the Albanian labels in the alert emails too (`src/lib/email-templates.ts`). Fill in the blanks by hand.

GREECON PLATFORM · PROJEKTI PILOT

Çfarë të bëj kur marr një alarm

What to do when you get an alert

1. **Hap emailin nga Greecon dhe shiko cili sensor tregon tokë të thatë.**
   Open the Greecon email and see which sensor shows dry soil.
2. **Kontrollo tokën me dorë në parcelë.**
   Check the soil by hand in the plot.
3. **Nëse toka është e thatë, ujit parcelën.**
   If the soil is dry, irrigate the plot.
4. **Hap platformën dhe shtyp "Acknowledge" te alarmi.**
   Open the platform and press "Acknowledge" on the alert.
5. **Alarmi mbyllet vetë kur toka bëhet përsëri e lagësht.**
   The alert closes by itself when the soil is moist again.

> STACIONI PA LIDHJE · STATION OFFLINE
>
> **Kontrollo rrymën dhe Wi-Fi. Nëse nuk rregullohet brenda disa orësh, telefono.**
> Check the power and the Wi-Fi. If it does not fix itself within a few hours, call.

Ky është një pilot: mos u mbështet vetëm te alarmet.
This is a pilot: do not rely on the alerts alone.

Platforma / Platform	_____	
Email-i im / My sign-in	_____	
Menaxheri i projektit / Project manager	_____	Tel. _____

Appendix 5 · Commands and addresses

Health check (opens in any browser): `https://<your-domain>/api/health`

Rehearsal without hardware. On a computer with Python 3, in the repository folder:

```
python3 devices/emulator/send_test_readings.py --url https://<your-domain> --key <rehearsal key>
python3 devices/emulator/send_test_readings.py --url https://<your-domain> --key <rehearsal key> --dry
```

The first command sends healthy values; `--dry` sends values below any normal limit to test alerts. Use only the Rehearsal key, never a station's key.

Appendix 6 · Risks and what to do about them

RISK	WHY IT MATTERS	WHAT REDUCES IT
Parts arrive late	Every day of delay is a day less of data.	Order by 14 Oct with express shipping. Gate A on 28 Oct.
Firmware never run on hardware	Compiles, but untested on a real board.	Bench test and 72-hour burn-in before any field work (steps 3.4–3.6). Spare board.
Poor sensors	Cheap soil sensors drift or fail, causing false alerts.	SEN0193 sensors, two spares, calibration, weekly chart check.
No Wi-Fi or power at the plot	The station cannot report.	Survey first (1.1). 4G router and solar kit as fallbacks.
A dead station looks like healthy soil	Silence is not “no problem”.	The platform emails “station offline” after 90 minutes without data.
Emails land in spam	The farmer never sees the alert.	Verified domain, test email on the farmer’s own phone, ask the farmer to mark “not spam”.
Farmer loses interest	No feedback means no “usefulness” result.	Weekly 10-minute call. Choose a farmer who wants this.
Install slips past 13 Nov	4 weeks cannot finish before 18 Dec.	Gate C. Agree a shorter run with Eridon early.
Costs not eligible	The grant may not cover hardware or hosting.	Ask in writing (0.4). The sums are small. Keep invoices in Greecon shpk’s name.
Data loss or a hosting surprise	Evidence is the deliverable.	Weekly CSV backup. Weekly look at Railway usage.

Appendix 7 · Sources and what is estimated

Checked on 12 and 13 October 2026. Plans and prices change often: confirm before you pay.

- Tirana Electronics: `tiranaelectronics.al`, including the product pages for the ESP32 board and soil moisture module, the electronic-components, sensor and module categories, and the shipping page (`/transporti/`).
- DFRobot: SEN0193 (`dfrobot.com/product-1385.html`), the waterproof DS18B20 kit (`dfrobot.com/product-1354.html`) and the shipping terms (`dfrobot.com/shipping`).
- Albanian customs, online purchases and postal consignments: `dogana.gov.al/english/c/226/online-shopping`. Commercial imports are not covered by that page.
- Railway blocks outbound SMTP on Free, Trial and Hobby plans and points to HTTPS email APIs: `docs.railway.com/networking/outbound-networking`
- Resend free plan, 3,000 emails a month, 100 a day: `resend.com/pricing` (sources disagree on the number of domains: confirm)
- Railway Hobby, US$5 a month including US$5 of usage, from community and third-party sources: confirm at `railway.com/pricing`
- Teltonika RUT241, about €148 net at Bechtle, about €179 with VAT.
- Cheap “v1.2” soil sensor clones can carry the wrong 555 timer chip and misbehave at 3.3 V: `atomic14.com/esp32/sensors/capacitive-soil`
- **Estimates, not quotes:** junction box, USB adapter, solar kit, consumables, tools and the TP-Link router come from the project’s hardware README and my own allowances. Shipping and VAT (+30%) is a planning allowance. Mobile plan prices come from travel blogs.
- **Not verified:** whether DFRobot, DigiKey, Mouser and Farnell deliver to Albania and at what cost (their pages did not name Albania or would not load); courier lead times to Tirana; how Albanian customs treats a company’s import (rates, VAT, duty); local sources for junction boxes, solar parts and 4G routers; Startup Albania’s rules on eligible costs.