



Swift Navigation Binary Protocol

Protocol Specification 2.3.0

Contents

1	Overview	1
2	Message Framing Structure	2
3	NMEA-0183	2
4	Basic Formats and Payload Structure	3
5	Message Types	4
6	Stable Message Definitions	7
6.1	Logging	7
6.2	Navigation	9
6.3	Observation	24
6.4	Settings	50
6.5	System	57
7	Draft Message Definitions	60
7.1	Acquisition	60
7.2	Ext Events	62
7.3	File IO	63
7.4	Imu	70
7.5	Mag	72
7.6	Orientation	73
7.7	Piksi	77
7.8	Tracking	97
7.9	User	99
7.10	Vehicle	100

1 Overview

The Swift Navigation Binary Protocol (SBP) is a fast, simple, and minimal binary protocol for communicating with Swift devices. It is the native binary protocol used by the Piksi GPS receiver to transmit solutions, observations, status, and debugging messages, as well as receive messages from the host operating system, such as differential corrections and the almanac. As such, it is an important interface with your Piksi receiver and the primary integration method with other systems.

This document provides a specification of SBP framing and the payload structures of the messages currently used with Swift devices. SBP client libraries in a variety of programming languages are available at http://docs.swiftnav.com/wiki/SwiftNav_Binary_Protocol.

2 Message Framing Structure

SBP consists of two pieces:

- an over-the-wire message framing format
- structured payload definitions

As of Version 2.3.0, the frame consists of a 6-byte binary header section, a variable-sized payload field, and a 16-bit CRC value. All multibyte values are ordered in **little-endian** format. SBP uses the CCITT CRC16 (XMODEM implementation) for error detection¹.

Offset (bytes)	Size (bytes)	Name	Description
0	1	Preamble	Denotes the start of frame transmission. Always 0x55.
1	2	Message Type	Identifies the payload contents.
3	2	Sender	A unique identifier of the sender. On the Piksi, this is set to the 2 least significant bytes of the device serial number. A stream of SBP messages may also include sender IDs for forwarded messages. By default, clients of 'libsbp' use a sender id value of '0x42'. Sender id '0x42' is used to represent device controllers such as the Piksi Console.
5	1	Length	Length (bytes) of the Payload field.
6	<i>N</i>	Payload	Binary message contents.
<i>N</i> + 6	2	CRC	Cyclic Redundancy Check of the frame's binary data from the Message Type up to the end of Payload (does not include the Preamble).
<i>N</i> + 8		Total Frame Length	

Table 2.0.1: Swift Binary Protocol message structure. *N* denotes a variable-length size.

3 NMEA-0183

Swift devices, such as the Piksi, also have limited support for the standard NMEA-0183 protocol.

Note that NMEA-0183 doesn't define standardized message string equivalents for many important SBP messages such as observations, baselines and ephemerides. For this reason it is strongly recommended to use SBP for new development. NMEA-0183 output is provided primarily to support legacy devices.

¹CCITT 16-bit CRC Implementation uses parameters used by XMODEM, i.e. the polynomial: $x^{16} + x^{12} + x^5 + 1$. For more details, please see the implementation at <https://github.com/swift-nav/libsbp/blob/master/c/src/edc.c#L59>. See also *A Painless Guide to CRC Error Detection Algorithms* at http://www.ross.net/crc/download/crc_v3.txt

4 Basic Formats and Payload Structure

The binary payload of an SBP message decodes into structured data based on the message type defined in the header. SBP uses several primitive numerical and collection types for defining payload contents.

Name	Size (bytes)	Description
s8	1	Signed 8-bit integer
s16	2	Signed 16-bit integer
s32	4	Signed 32-bit integer
s64	8	Signed 64-bit integer
u8	1	Unsigned 8-bit integer
u16	2	Unsigned 16-bit integer
u32	4	Unsigned 32-bit integer
u64	8	Unsigned 64-bit integer
float	4	Single-precision float (IEEE-754)
double	8	Double-precision float (IEEE-754)
array	—	Fixed or variable length array of any fill type
string	—	Fixed or variable length string (NULL padded/terminated)
bitfield	—	A primitive type, typically a u8, can encode boolean and enumerated status flags.

Table 4.0.2: SBP primitive types

Example Message

As an example, consider this framed series of bytes read from a serial port:

55 02 02 cc 04 14 70 3d d0 18 cf ef ff ff ef e8 ff ff f0 18 00 00 00 05 00 43 94

This byte array decodes into a `MSG_BASELINE_ECEF` (see pg. 12), which reports the baseline position solution of the rover receiver relative to the base station receiver in Earth Centered Earth Fixed (ECEF) coordinates. The segments of this byte array and its contents break down as follows:

Field Name	Type	Value	Bytestring Segment
Preamble	u8	0x55	55
Message Type	u16	<code>MSG_BASELINE_ECEF</code>	02 02
Sender	u16	1228	cc 04
Length	u8	20	14
Payload	—	—	70 3d d0 18 cf ef ff ff ef e8 ff ff f0 18 00 00 00 05 00
<code>MSG_BASELINE_ECEF</code>			
.tow	u32	416300400 msec	70 3d d0 18
.x	s32	−4145 mm	cf ef ff ff
.y	s32	−5905 mm	ef e8 ff ff
.z	s32	6384 mm	f0 18 00 00
.accuracy	u16	0	00 00
.nsats	u8	5	05
.flags	u8	0	00
CRC	u16	0x9443	43 94

Table 4.0.3: SBP breakdown for `MSG_BASELINE_ECEF`

5 Message Types

Packages define a logical collection of SBP messages. The contents and layout of messages in packages marked **stable** are unlikely to change in the future. **Draft** messages *will change with future development* and are detailed purely for *informational purposes only*. Many draft messages are implementation-defined, and some collections, such as the acquisition package, are used for internal development.

Package	Msg ID	Name	Size (bytes)	Description
Stable				
Logging	0x0401	MSG_LOG	$N + 1$	Plaintext logging messages with levels
	0x0402	MSG_FWD	$N + 2$	Wrapper for FWD a separate stream of information over SBP
Navigation	0x0102	MSG_GPS_TIME	11	GPS Time
	0x0103	MSG_UTC_TIME	16	UTC Time
	0x0208	MSG_DOPS	15	Dilution of Precision
	0x0209	MSG_POS_ECEF	32	Single-point position in ECEF
	0x0214	MSG_POS_ECEF_COV	54	Single-point position in ECEF
	0x020A	MSG_POS_LLH	34	Geodetic Position
	0x0211	MSG_POS_LLH_COV	54	Geodetic Position
	0x020B	MSG_BASELINE_ECEF	20	Baseline Position in ECEF
	0x020C	MSG_BASELINE_NED	22	Baseline in NED
	0x020D	MSG_VEL_ECEF	20	Velocity in ECEF
	0x0215	MSG_VEL_ECEF_COV	42	Velocity in ECEF
	0x020E	MSG_VEL_NED	22	Velocity in NED
	0x0212	MSG_VEL_NED_COV	42	Velocity in NED
	0x0213	MSG_VEL_BODY	42	Velocity in User Frame
	0x0210	MSG_AGE_CORRECTIONS	6	Age of corrections
Observation	0x004A	MSG_OBS	$17N + 11$	GPS satellite observations
	0x0044	MSG_BASE_POS_LLH	24	Base station position
	0x0048	MSG_BASE_POS_ECEF	24	Base station position in ECEF
	0x0081	MSG_EPHEMERIS_GPS_DEP_E	185	Satellite broadcast ephemeris for GPS
	0x0086	MSG_EPHEMERIS_GPS	183	Satellite broadcast ephemeris for GPS
	0x0082	MSG_EPHEMERIS_SBAS_DEP_A	112	Satellite broadcast ephemeris for SBAS
	0x0083	MSG_EPHEMERIS_GLO_DEP_A	112	Satellite broadcast ephemeris for GLO
	0x0084	MSG_EPHEMERIS_SBAS	110	Satellite broadcast ephemeris for SBAS
	0x0085	MSG_EPHEMERIS_GLO_DEP_B	110	Satellite broadcast ephemeris for GLO
	0x0087	MSG_EPHEMERIS_GLO_DEP_C	119	Satellite broadcast ephemeris for GLO
	0x0088	MSG_EPHEMERIS_GLO	120	Satellite broadcast ephemeris for GLO
	0x0090	MSG_IONO	70	Iono corrections
	0x0091	MSG_SV_CONFIGURATION_GPS	10	L2C capability mask
	0x0092	MSG_GROUP_DELAY_DEP_A	14	Group Delay
	0x0093	MSG_GROUP_DELAY_DEP_B	17	Group Delay
	0x0094	MSG_GROUP_DELAY	15	Group Delay
	0x0072	MSG_ALMANAC_GPS	94	Satellite broadcast ephemeris for GPS
	0x0073	MSG_ALMANAC_GLO	78	Satellite broadcast ephemeris for GLO
	0x0075	MSG_GLO_BIASES	9	GLONASS L1/L2 Code-Phase biases
Settings	0x00A1	MSG_SETTINGS_SAVE	0	Save settings to flash
	0x00A0	MSG_SETTINGS_WRITE	N	Write device configuration settings
	0x00A4	MSG_SETTINGS_READ_REQ	N	Read device configuration settings
	0x00A5	MSG_SETTINGS_READ_RESP	N	Read device configuration settings
	0x00A2	MSG_SETTINGS_READ_BY_INDEX_REQ	2	Read setting by direct index

System	0x00A7	MSG_SETTINGS_READ_BY_INDEX_RESP	$N + 2$	Read setting by direct index
	0x00A6	MSG_SETTINGS_READ_BY_INDEX_DONE	0	Finished reading settings
	0xFF00	MSG_STARTUP	4	System start-up message
	0xFF02	MSG_DGNSS_STATUS	$N + 4$	Status of received corrections
	0xFFFF	MSG_HEARTBEAT	4	System heartbeat message
Draft				
Acquisition	0x002F	MSG_ACQ_RESULT	14	Satellite acquisition result
	0x002E	MSG_ACQ_SV_PROFILE	33 <i>N</i>	Acquisition performance measurement and debug
Ext Events	0x0101	MSG_EXT_EVENT	12	Reports timestamped external pin event
File IO	0x00A8	MSG_FILEIO_READ_REQ	$N + 9$	Read file from the file system
	0x00A3	MSG_FILEIO_READ_RESP	$N + 4$	File read from the file system
	0x00A9	MSG_FILEIO_READ_DIR_REQ	$N + 8$	List files in a directory
	0x00AA	MSG_FILEIO_READ_DIR_RESP	$N + 4$	Files listed in a directory
	0x00AC	MSG_FILEIO_REMOVE	N	Delete a file from the file system
	0x00AD	MSG_FILEIO_WRITE_REQ	$N + 9$	Write to file
	0x00AB	MSG_FILEIO_WRITE_RESP	4	File written to
	0x0900	MSG_IMU_RAW	17	Raw IMU data
Imu	0x0901	MSG_IMU_AUX	4	Auxiliary IMU data
Mag	0x0902	MSG_MAG_RAW	11	Raw magnetometer data
Orientation	0x020F	MSG_BASELINE_HEADING	10	Heading relative to True North
	0x0220	MSG_ORIENT_QUAT	37	Quaternion 4 component vector
	0x0221	MSG_ORIENT_EULER	23	Euler angles
	0x0222	MSG_ANGULAR_RATE	11	Vehicle Body Frame instantaneous angular rates
Piksi	0x0069	MSG_ALMANAC	0	Legacy message to load satellite almanac
	0x0068	MSG_SET_TIME	0	Send GPS time from host
	0x00B6	MSG_RESET	4	Reset the device
	0x00B2	MSG_RESET_DEP	0	Reset the device
	0x00C0	MSG_CW_RESULTS	0	Legacy message for CW interference channel (Piksi = j host)
	0x00C1	MSG_CW_START	0	Legacy message for CW interference channel
	0x0022	MSG_RESET_FILTERS	1	Reset IAR filters
	0x0023	MSG_INIT_BASE	0	Initialize IAR from known baseline
	0x0017	MSG_THREAD_STATE	26	State of an RTOS thread
	0x001D	MSG_UART_STATE	74	State of the UART channels
	0x0018	MSG_UART_STATE_DEPA	58	Deprecated
	0x0019	MSG_IAR_STATE	4	State of the Integer Ambiguity Resolution (IAR) process
	0x002B	MSG_MASK_SATELLITE	3	Mask a satellite from use in Piksi subsystems
	0x00B5	MSG_DEVICE_MONITOR	10	Device temperature and voltage levels
	0x00B8	MSG_COMMAND_REQ	$N + 4$	Execute a command
	0x00B9	MSG_COMMAND_RESP	8	Exit code from executed command (device = j host)
	0x00BC	MSG_COMMAND_OUTPUT	$N + 4$	Command output
	0x00BA	MSG_NETWORK_STATE_REQ	0	Request state of Piksi network interfaces
	0x00BB	MSG_NETWORK_STATE_RESP	50	State of network interface
	0x0051	MSG_SPECAN	$N + 28$	Spectrum analyzer
Tracking	0x0041	MSG_TRACKING_STATE	4 <i>N</i>	Signal tracking channel states
	0x002C	MSG_TRACKING_IQ	8 <i>N</i> + 3	Tracking channel correlations
User	0x0800	MSG_USER_DATA	N	User data
Vehicle	0x0903	MSG_ODOMETRY	9	Vehicle forward (x-axis) velocity

Table 5.0.5: SBP message types

6 Stable Message Definitions

6.1 Logging

Logging and debugging messages from the device.

MSG.LOG — 0x0401 — 1025

This message contains a human-readable payload string from the device containing errors, warnings and informational messages at ERROR, WARNING, DEBUG, INFO logging levels.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8		level	Logging level
1	N	string		text	Human-readable string
	$N + 1$				Total Payload Length

Table 6.1.1: MSG.LOG 0x0401 message structure

7

3

2

0

Reserved

Logging level (Table 6.1.2)

Value	Description
0	EMERG
1	ALERT
2	CRIT
3	ERROR
4	WARN
5	NOTICE
6	INFO
7	DEBUG

Field 6.1.1: Logging level (level)

Table 6.1.2: Logging level values (level[0:2])

MSG_FWD — 0x0402 — 1026

This message provides the ability to forward messages over SBP. This may take the form of wrapping up SBP messages received by Piksi for logging purposes or wrapping another protocol with SBP.

The source identifier indicates from what interface a forwarded stream derived. The protocol identifier identifies what the expected protocol the forwarded msg contains. Protocol 0 represents SBP and the remaining values are implementation defined.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8		source	source identifier
1	1	u8		protocol	protocol identifier
2	<i>N</i>	string		fwd_payload	variable length wrapped binary message
	<i>N + 2</i>				Total Payload Length

Table 6.1.3: MSG_FWD 0x0402 message structure

6.2 Navigation

Geodetic navigation messages reporting GPS time, position, velocity, and baseline position solutions. For position solutions, these messages define several different position solutions: single-point (SPP), RTK, and pseudo-absolute position solutions.

The SPP is the standalone, absolute GPS position solution using only a single receiver. The RTK solution is the differential GPS solution, which can use either a fixed/integer or floating carrier phase ambiguity. The pseudo-absolute position solution uses a user-provided, well-surveyed base station position (if available) and the RTK solution in tandem.

When the inertial navigation mode indicates that the IMU is used, all messages are reported in the vehicle body frame as defined by device settings. By default, the vehicle body frame is configured to be coincident with the antenna phase center. When there is no inertial navigation, the solution will be reported at the phase center of the antenna.


MSG_GPS.TIME — 0x0102 — 258

This message reports the GPS time, representing the time since the GPS epoch began on midnight January 6, 1980 UTC. GPS time counts the weeks and seconds of the week. The weeks begin at the Saturday/Sunday transition. GPS week 0 began at the beginning of the GPS time scale.

Within each week number, the GPS time of the week is between 0 and 604800 seconds ($=60*60*24*7$). Note that GPS time does not accumulate leap seconds, and as of now, has a small offset from UTC. In a message stream, this message precedes a set of other navigation messages referenced to the same time (but lacking the ns field) and indicates a more precise time of these messages.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	2	u16	weeks	wn	GPS week number
2	4	u32	ms	tow	GPS time of week rounded to the nearest millisecond
6	4	s32	ns	ns_residual	Nanosecond residual of millisecond-rounded TOW (ranges from -500000 to 500000)
10	1	u8		flags	Status flags (reserved)
	11				Total Payload Length

Table 6.2.1: MSG_GPS.TIME 0x0102 message structure

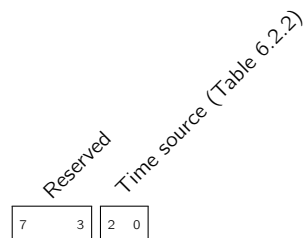

Field 6.2.1: Status flags (reserved) (flags)

Value	Description
0	None (invalid)
1	GNSS Solution

Table 6.2.2: Time source values (flags[0:2])

MSG.UTC.TIME — 0x0103 — 259

This message reports the Universal Coordinated Time (UTC). Note the flags which indicate the source of the UTC offset value and source of the time fix.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8		flags	Indicates source and time validity
1	4	u32	ms	tow	GPS time of week rounded to the nearest millisecond
5	2	u16	year	year	Year
7	1	u8	months	month	Month (range 1 .. 12)
8	1	u8	day	day	days in the month (range 1-31)
9	1	u8	hours	hours	hours of day (range 0-23)
10	1	u8	minutes	minutes	minutes of hour (range 0-59)
11	1	u8	seconds	seconds	seconds of minute (range 0-60) rounded down
12	4	u32	nanoseconds	ns	nanoseconds of second (range 0-999999999)
16					Total Payload Length


Table 6.2.3: MSG.UTC.TIME 0x0103 message structure

Value	Description
0	None (invalid)
1	GNSS Solution

Table 6.2.4: Time source values (flags[0:2])

Value	Description
0	Factory Default
1	Non Volatile Memory
2	Decoded this Session

Table 6.2.5: UTC offset source values (flags[3:4])

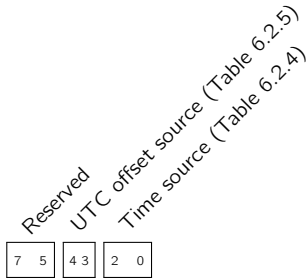

Field 6.2.2: Indicates source and time validity (flags)

MSG_DOPS — 0x0208 — 520

This dilution of precision (DOP) message describes the effect of navigation satellite geometry on positional measurement precision. The flags field indicated whether the DOP reported corresponds to differential or SPP solution.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	tow	GPS Time of Week
4	2	u16	0.01	gdop	Geometric Dilution of Precision
6	2	u16	0.01	pdop	Position Dilution of Precision
8	2	u16	0.01	tdop	Time Dilution of Precision
10	2	u16	0.01	hdop	Horizontal Dilution of Precision
12	2	u16	0.01	vdop	Vertical Dilution of Precision
14	1	u8		flags	Indicates the position solution with which the DOPS message corresponds
15					Total Payload Length

Table 6.2.6: MSG_DOPS 0x0208 message structure

7

6

3

2

0

RAM repair flag

Reserved

Fix mode (Table 6.2.7)

Field 6.2.3: Indicates the position solution with which the DOPS message corresponds (flags)

Value	Description
0	Invalid
1	Single Point Position (SPP)
2	Differential GNSS (DGNSS)
3	Float RTK
4	Fixed RTK

Table 6.2.7: Fix mode values (flags[0:2])

MSG_POS_ECEF — 0x0209 — 521

The position solution message reports absolute Earth Centered Earth Fixed (ECEF) coordinates and the status (single point vs pseudo-absolute RTK) of the position solution. If the rover receiver knows the surveyed position of the base station and has an RTK solution, this reports a pseudo-absolute position solution using the base station position and the rover's RTK baseline vector. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

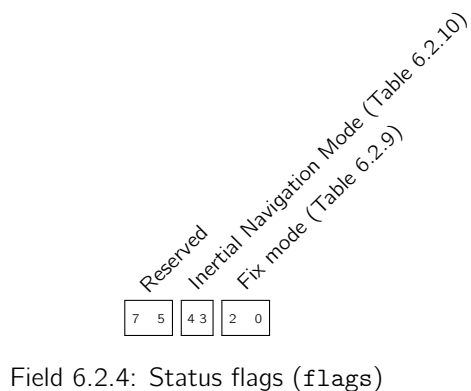
Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	<code>tow</code>	GPS Time of Week
4	8	double	m	<code>x</code>	ECEF X coordinate
12	8	double	m	<code>y</code>	ECEF Y coordinate
20	8	double	m	<code>z</code>	ECEF Z coordinate
28	2	u16	mm	<code>accuracy</code>	Position estimated standard deviation
30	1	u8		<code>n_sats</code>	Number of satellites used in solution
31	1	u8		<code>flags</code>	Status flags
32					Total Payload Length

Table 6.2.8: MSG_POS_ECEF 0x0209 message structure

Value	Description
0	Invalid
1	Single Point Position (SPP)
2	Differential GNSS (DGNSS)
3	Float RTK
4	Fixed RTK
5	Dead Reckoning

Table 6.2.9: Fix mode values (`flags[0:2]`)

Value	Description
0	None
1	INS used

Table 6.2.10: Inertial Navigation Mode values (`flags[3:4]`)

MSG_POS_ECEF_COV — 0x0214 — 532

The position solution message reports absolute Earth Centered Earth Fixed (ECEF) coordinates and the status (single point vs pseudo-absolute RTK) of the position solution. The message also reports the upper triangular portion of the 3x3 covariance matrix. If the receiver knows the surveyed position of the base station and has an RTK solution, this reports a pseudo-absolute position solution using the base station position and the rover's RTK baseline vector. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	tow	GPS Time of Week
4	8	double	m	x	ECEF X coordinate
12	8	double	m	y	ECEF Y coordinate
20	8	double	m	z	ECEF Z coordinate
28	4	float	m ²	cov_x_x	Estimated variance of x
32	4	float	m ²	cov_x_y	Estimated covariance of x and y
36	4	float	m ²	cov_x_z	Estimated covariance of x and z
40	4	float	m ²	cov_y_y	Estimated variance of y
44	4	float	m ²	cov_y_z	Estimated covariance of y and z
48	4	float	m ²	cov_z_z	Estimated variance of z
52	1	u8		n_sats	Number of satellites used in solution
53	1	u8		flags	Status flags
54					Total Payload Length


Table 6.2.11: MSG_POS_ECEF_COV 0x0214 message structure

Value	Description
0	Invalid
1	Single Point Position (SPP)
2	Differential GNSS (DGNSS)
3	Float RTK
4	Fixed RTK
5	Dead Reckoning

Table 6.2.12: Fix mode values (flags[0:2])

Value	Description
0	None
1	INS used

Table 6.2.13: Inertial Navigation Mode values (flags[3:4])

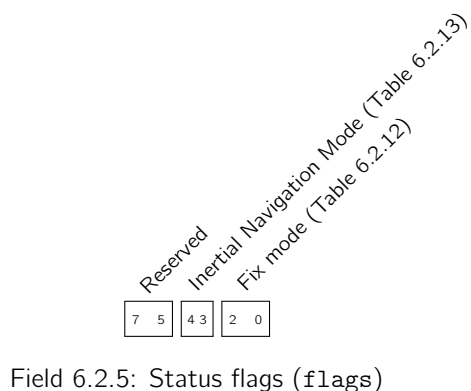


MSG_POS_LLH — 0x020A — 522

This position solution message reports the absolute geodetic coordinates and the status (single point vs pseudo-absolute RTK) of the position solution. If the rover receiver knows the surveyed position of the base station and has an RTK solution, this reports a pseudo-absolute position solution using the base station position and the rover's RTK baseline vector. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	tow	GPS Time of Week
4	8	double	deg	lat	Latitude
12	8	double	deg	lon	Longitude
20	8	double	m	height	Height above WGS84 ellipsoid
28	2	u16	mm	h_accuracy	Horizontal position estimated standard deviation
30	2	u16	mm	v_accuracy	Vertical position estimated standard deviation
32	1	u8		n_sats	Number of satellites used in solution.
33	1	u8		flags	Status flags
34					Total Payload Length

Table 6.2.14: MSG_POS_LLH 0x020A message structure

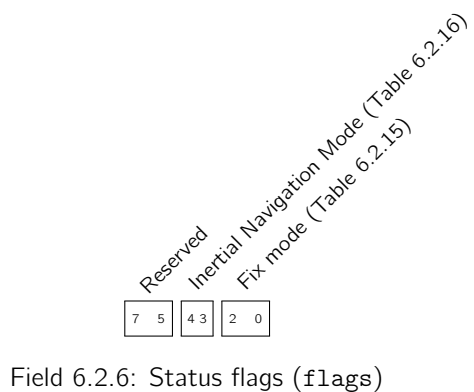

Value	Description
0	Invalid
1	Single Point Position (SPP)
2	Differential GNSS (DGNSS)
3	Float RTK
4	Fixed RTK
5	Dead Reckoning

Table 6.2.15: Fix mode values (flags[0:2])

Value	Description
0	None
1	INS used

Table 6.2.16: Inertial Navigation Mode values (flags[3:4])


MSG_POS_LLH_COV — 0x0211 — 529

This position solution message reports the absolute geodetic coordinates and the status (single point vs pseudo-absolute RTK) of the position solution as well as the upper triangle of the 3x3 covariance matrix. The position information and Fix Mode flags should follow the MSG_POS_LLH message. Since the covariance matrix is computed in the local-level North, East, Down frame, the covariance terms follow with that convention. Thus, covariances are reported against the "downward" measurement and care should be taken with the sign convention.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	<code>tow</code>	GPS Time of Week
4	8	double	deg	<code>lat</code>	Latitude
12	8	double	deg	<code>lon</code>	Longitude
20	8	double	m	<code>height</code>	Height above WGS84 ellipsoid
28	4	float	m ²	<code>cov_n_n</code>	Estimated variance of northing
32	4	float	m ²	<code>cov_n_e</code>	Covariance of northing and easting
36	4	float	m ²	<code>cov_n_d</code>	Covariance of northing and downward measurement
40	4	float	m ²	<code>cov_e_e</code>	Estimated variance of easting
44	4	float	m ²	<code>cov_e_d</code>	Covariance of easting and downward measurement
48	4	float	m ²	<code>cov_d_d</code>	Estimated variance of downward measurement
52	1	u8		<code>n_sats</code>	Number of satellites used in solution.
53	1	u8		<code>flags</code>	Status flags
54					Total Payload Length

Table 6.2.17: MSG_POS_LLH_COV 0x0211 message structure

Value	Description
0	Invalid
1	Single Point Position (SPP)
2	Differential GNSS (DGNSS)
3	Float RTK
4	Fixed RTK
5	Dead Reckoning

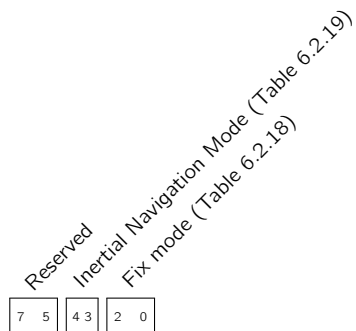Table 6.2.18: Fix mode values (`flags[0:2]`)Field 6.2.7: Status flags (`flags`)

Value	Description
0	None
1	INS used


Table 6.2.19: Inertial Navigation Mode values (`flags[3:4]`)

MSG_BASELINE_ECEF — 0x020B — 523

This message reports the baseline solution in Earth Centered Earth Fixed (ECEF) coordinates. This baseline is the relative vector distance from the base station to the rover receiver. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	tow	GPS Time of Week
4	4	s32	mm	x	Baseline ECEF X coordinate
8	4	s32	mm	y	Baseline ECEF Y coordinate
12	4	s32	mm	z	Baseline ECEF Z coordinate
16	2	u16	mm	accuracy	Position estimated standard deviation
18	1	u8		n_sats	Number of satellites used in solution
19	1	u8		flags	Status flags
20					Total Payload Length

Table 6.2.20: MSG_BASELINE_ECEF 0x020B message structure

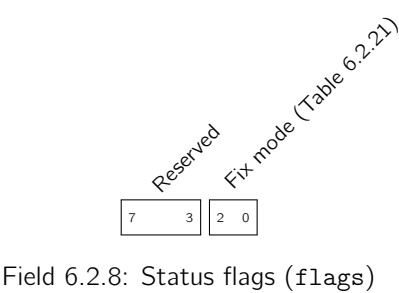

Field 6.2.8: Status flags (flags)

Value	Description
0	Invalid
1	Reserved
2	Differential GNSS (DGNSS)
3	Float RTK
4	Fixed RTK


Table 6.2.21: Fix mode values (flags[0:2])

MSG_BASELINE_NED — 0x020C — 524

This message reports the baseline solution in North East Down (NED) coordinates. This baseline is the relative vector distance from the base station to the rover receiver, and NED coordinate system is defined at the local WGS84 tangent plane centered at the base station position. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	tow	GPS Time of Week
4	4	s32	mm	n	Baseline North coordinate
8	4	s32	mm	e	Baseline East coordinate
12	4	s32	mm	d	Baseline Down coordinate
16	2	u16	mm	h_accuracy	Horizontal position estimated standard deviation
18	2	u16	mm	v_accuracy	Vertical position estimated standard deviation
20	1	u8		n_sats	Number of satellites used in solution
21	1	u8		flags	Status flags
22					Total Payload Length

Table 6.2.22: MSG_BASELINE_NED 0x020C message structure

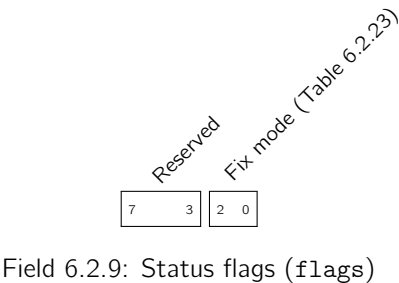

Value	Description
0	Invalid
1	Reserved
2	Differential GNSS (DGNSS)
3	Float RTK
4	Fixed RTK


Table 6.2.23: Fix mode values (flags[0:2])

MSG_VEL_ECEF — 0x020D — 525

This message reports the velocity in Earth Centered Earth Fixed (ECEF) coordinates. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	tow	GPS Time of Week
4	4	s32	mm/s	x	Velocity ECEF X coordinate
8	4	s32	mm/s	y	Velocity ECEF Y coordinate
12	4	s32	mm/s	z	Velocity ECEF Z coordinate
16	2	u16	mm/s	accuracy	Velocity estimated standard deviation
18	1	u8		n_sats	Number of satellites used in solution
19	1	u8		flags	Status flags
20					Total Payload Length

Table 6.2.24: MSG_VEL_ECEF 0x020D message structure

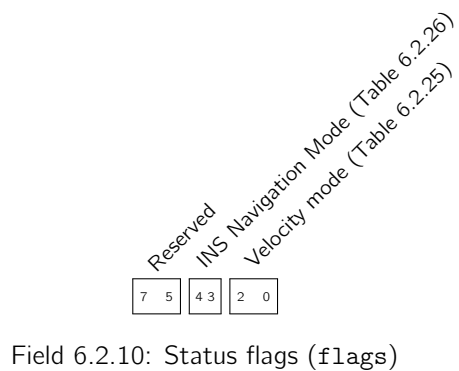

Value	Description
0	Invalid
1	Measured Doppler derived
2	Computed Doppler derived
3	Dead Reckoning

Table 6.2.25: Velocity mode values (flags[0:2])

Value	Description
0	None
1	INS used


Table 6.2.26: INS Navigation Mode values (flags[3:4])

MSG_VEL_ECEF_COV — 0x0215 — 533

This message reports the velocity in Earth Centered Earth Fixed (ECEF) coordinates. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	tow	GPS Time of Week
4	4	s32	mm/s	x	Velocity ECEF X coordinate
8	4	s32	mm/s	y	Velocity ECEF Y coordinate
12	4	s32	mm/s	z	Velocity ECEF Z coordinate
16	4	float	m ² /s ²	cov_x_x	Estimated variance of x
20	4	float	m ² /s ²	cov_x_y	Estimated covariance of x and y
24	4	float	m ² /s ²	cov_x_z	Estimated covariance of x and z
28	4	float	m ² /s ²	cov_y_y	Estimated variance of y
32	4	float	m ² /s ²	cov_y_z	Estimated covariance of y and z
36	4	float	m ² /s ²	cov_z_z	Estimated variance of z
40	1	u8		n_sats	Number of satellites used in solution
41	1	u8		flags	Status flags
42					Total Payload Length

Table 6.2.27: MSG_VEL_ECEF_COV 0x0215 message structure

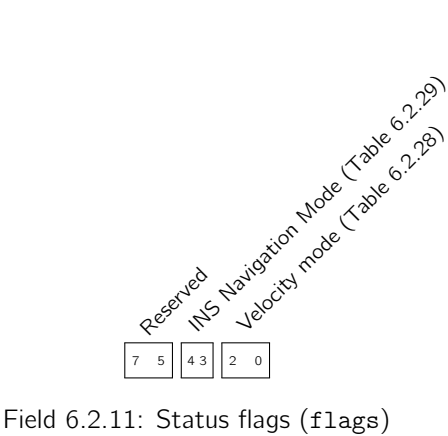

Value	Description
0	Invalid
1	Measured Doppler derived
2	Computed Doppler derived
3	Dead Reckoning

Table 6.2.28: Velocity mode values (flags[0:2])

Value	Description
0	None
1	INS used

Table 6.2.29: INS Navigation Mode values (flags[3:4])

MSG_VEL_NED — 0x020E — 526

This message reports the velocity in local North East Down (NED) coordinates. The NED coordinate system is defined as the local WGS84 tangent plane centered at the current position. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	tow	GPS Time of Week
4	4	s32	mm/s	n	Velocity North coordinate
8	4	s32	mm/s	e	Velocity East coordinate
12	4	s32	mm/s	d	Velocity Down coordinate
16	2	u16	mm/s	h_accuracy	Horizontal velocity estimated standard deviation
18	2	u16	mm/s	v_accuracy	Vertical velocity estimated standard deviation
20	1	u8		n_sats	Number of satellites used in solution
21	1	u8		flags	Status flags
22					Total Payload Length


Table 6.2.30: MSG_VEL_NED 0x020E message structure

Value	Description
0	Invalid
1	Measured Doppler derived
2	Computed Doppler derived
3	Dead Reckoning

Table 6.2.31: Velocity mode values (flags[0:2])

Value	Description
0	None
1	INS used

Table 6.2.32: INS Navigation Mode values (flags[3:4])

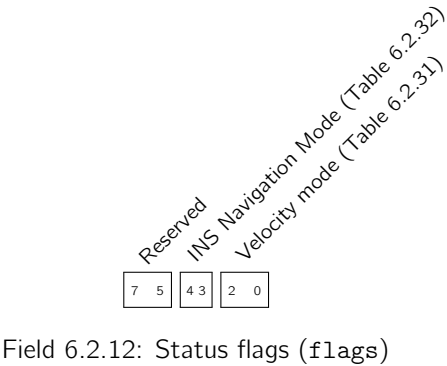

MSG_VEL_NED_COV — 0x0212 — 530

This message reports the velocity in local North East Down (NED) coordinates. The NED coordinate system is defined as the local WGS84 tangent plane centered at the current position. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow). This message is similar to the MSG_VEL_NED, but it includes the upper triangular portion of the 3x3 covariance matrix.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	tow	GPS Time of Week
4	4	s32	mm/s	n	Velocity North coordinate
8	4	s32	mm/s	e	Velocity East coordinate
12	4	s32	mm/s	d	Velocity Down coordinate
16	4	float	m ²	cov_n_n	Estimated variance of northward measurement
20	4	float	m ²	cov_n_e	Covariance of northward and eastward measurement
24	4	float	m ²	cov_n_d	Covariance of northward and downward measurement
28	4	float	m ²	cov_e_e	Estimated variance of eastward measurement
32	4	float	m ²	cov_e_d	Covariance of eastward and downward measurement
36	4	float	m ²	cov_d_d	Estimated variance of downward measurement
40	1	u8		n_sats	Number of satellites used in solution
41	1	u8		flags	Status flags
42					Total Payload Length


Table 6.2.33: MSG_VEL_NED_COV 0x0212 message structure

Value	Description
0	Invalid
1	Measured Doppler derived
2	Computed Doppler derived
3	Dead Reckoning

Table 6.2.34: Velocity mode values (flags[0:2])

Value	Description
0	None
1	INS used

Table 6.2.35: INS Navigation Mode values (flags[3:4])

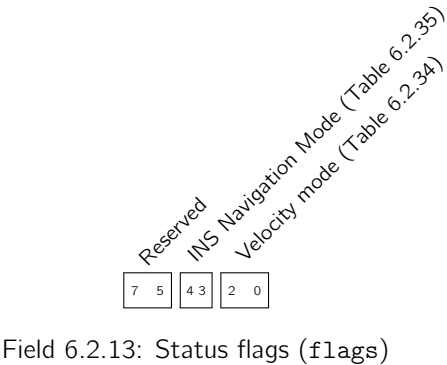

MSG_VEL_BODY — 0x0213 — 531

This message reports the velocity in the Vehicle Body Frame. By convention, the x-axis should point out the nose of the vehicle and represent the forward direction, while as the y-axis should point out the right hand side of the vehicle. Since this is a right handed system, z should point out the bottom of the vehicle. The orientation and origin of the Vehicle Body Frame are specified via the device settings. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	tow	GPS Time of Week
4	4	s32	mm/s	x	Velocity in x direction
8	4	s32	mm/s	y	Velocity in y direction
12	4	s32	mm/s	z	Velocity in z direction
16	4	float	m^2	cov_x_x	Estimated variance of x
20	4	float	m^2	cov_x_y	Covariance of x and y
24	4	float	m^2	cov_x_z	Covariance of x and z
28	4	float	m^2	cov_y_y	Estimated variance of y
32	4	float	m^2	cov_y_z	Covariance of y and z
36	4	float	m^2	cov_z_z	Estimated variance of z
40	1	u8		n_sats	Number of satellites used in solution
41	1	u8		flags	Status flags
42					Total Payload Length


Table 6.2.36: MSG_VEL_BODY 0x0213 message structure

Value	Description
0	Invalid
1	Measured Doppler derived
2	Computed Doppler derived
3	Dead Reckoning

Table 6.2.37: Velocity mode values (flags[0:2])

Value	Description
0	None
1	INS used

Table 6.2.38: INS Navigation Mode values (flags[3:4])

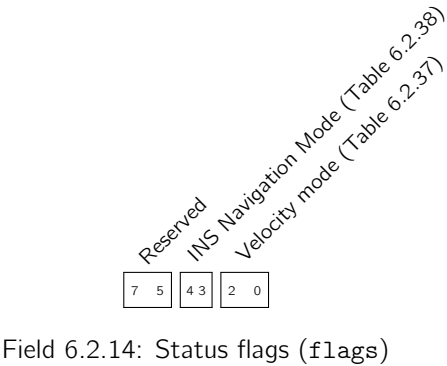

MSG_AGE_CORRECTIONS — 0x0210 — 528

This message reports the Age of the corrections used for the current Differential solution

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	tow	GPS Time of Week
4	2	u16	deciseconds	age	Age of the corrections (0xFFFF indicates invalid)
6					Total Payload Length

Table 6.2.39: MSG_AGE_CORRECTIONS 0x0210 message structure

6.3 Observation


Satellite observation messages from the device.

MSG_OBS — 0x004A — 74


The GPS observations message reports all the raw pseudorange and carrier phase observations for the satellites being tracked by the device. Carrier phase observation here is represented as a 40-bit fixed point number with Q32.8 layout (i.e. 32-bits of whole cycles and 8-bits of fractional cycles). The observations are be interoperable with 3rd party receivers and conform with typical RTCMv3 GNSS observations.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	header.t.tow	Milliseconds since start of GPS week
4	4	s32	ns	header.t.ns_residual	Nanosecond residual of millisecond-rounded TOW (ranges from -500000 to 500000)
8	2	u16	week	header.t.wn	GPS week number
10	1	u8		header.n_obs	Total number of observations. First nibble is the size of the sequence (n), second nibble is the zero-indexed counter (ith packet of n)
17N + 11	4	u32	2 cm	obs[N].P	Pseudorange observation
17N + 15	4	s32	cycles	obs[N].L.i	Carrier phase whole cycles
17N + 19	1	u8	cycles / 256	obs[N].L.f	Carrier phase fractional part
17N + 20	2	s16	Hz	obs[N].D.i	Doppler whole Hz
17N + 22	1	u8	Hz / 256	obs[N].D.f	Doppler fractional part
17N + 23	1	u8	dB Hz / 4	obs[N].cn0	Carrier-to-Noise density. Zero implies invalid cn0.
17N + 24	1	u8		obs[N].lock	Lock timer. This value gives an indication of the time for which a signal has maintained continuous phase lock. Whenever a signal has lost and regained lock, this value is reset to zero. It is encoded according to DF402 from the RTCM 10403.2 Amendment 2 specification. Valid values range from 0 to 15 and the most significant nibble is reserved for future use.
17N + 25	1	u8		obs[N].flags	Measurement status flags. A bit field of flags providing the status of this observation. If this field is 0 it means only the Cn0 estimate for the signal is valid.
17N + 26	1	u8		obs[N].sid.sa	Constellation-specific satellite identifier
17N + 27	1	u8		obs[N].sid.code	Signal constellation, band and code
17N + 11					Total Payload Length

Table 6.3.1: MSG_OBS 0x004A message structure

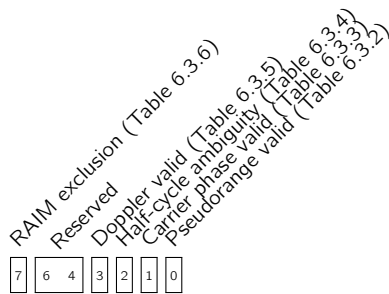

Field 6.3.1: Measurement status flags. A bit field of flags providing the status of this observation. If this field is 0 it means only the Cn0 estimate for the signal is valid. (flags)



Field 6.3.2: Signal constellation, band and code (sid.code)

Value	Description
0	Invalid pseudorange measurement
1	Valid pseudorange measurement and coarse TOW decoded

Table 6.3.2: Pseudorange valid values (flags[0])

Value	Description
0	Invalid carrier phase measurement
1	Valid carrier phase measurement

Table 6.3.3: Carrier phase valid values (flags[1])

Value	Description
0	Half cycle phase ambiguity unresolved
1	Half cycle phase ambiguity resolved

Table 6.3.4: Half-cycle ambiguity values (flags[2])

Value	Description
0	Invalid doppler measurement
1	Valid doppler measurement

Table 6.3.5: Doppler valid values (flags[3])

Value	Description
0	No exclusion
1	Measurement was excluded by SPP RAIM, use with care

Table 6.3.6: RAIM exclusion values (flags[7])

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P

Table 6.3.7: values (sid.code[0:7])

MSG_BASE_POS_LLH — 0x0044 — 68

The base station position message is the position reported by the base station itself. It is used for pseudo-absolute RTK positioning, and is required to be a high-accuracy surveyed location of the base station. Any error here will result in an error in the pseudo-absolute position output.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	8	double	deg	lat	Latitude
8	8	double	deg	lon	Longitude
16	8	double	m	height	Height
24					Total Payload Length

Table 6.3.8: MSG_BASE_POS_LLH 0x0044 message structure

MSG_BASE_POS_ECEF — 0x0048 — 72

The base station position message is the position reported by the base station itself in absolute Earth Centered Earth Fixed coordinates. It is used for pseudo-absolute RTK positioning, and is required to be a high-accuracy surveyed location of the base station. Any error here will result in an error in the pseudo-absolute position output.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	8	double	m	x	ECEF X coordinate
8	8	double	m	y	ECEF Y coordinate
16	8	double	m	z	ECEF Z coordinate
	24				Total Payload Length


Table 6.3.9: MSG_BASE_POS_ECEF 0x0048 message structure

MSG_EPHEMERIS_GPS_DEP_E — 0x0081 — 129

The ephemeris message returns a set of satellite orbit parameters that is used to calculate GPS satellite position, velocity, and clock offset. Please see the Navstar GPS Space Segment/Navigation user interfaces (ICD-GPS-200, Table 20-III) for more details.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	2	u16		<code>common.sid.sat</code>	Constellation-specific satellite identifier. Note: unlike GnssSignal, GPS satellites are encoded as (PRN - 1). Other constellations do not have this offset.
2	1	u8		<code>common.sid.code</code>	Signal constellation, band and code
3	1	u8		<code>common.sid.reserved</code>	Reserved
4	4	u32	ms	<code>common.toe.tow</code>	Milliseconds since start of GPS week
8	2	u16	week	<code>common.toe.wn</code>	GPS week number
10	8	double	m	<code>common.ura</code>	User Range Accuracy
18	4	u32	s	<code>common.fit.int</code>	Curve fit interval
22	1	u8		<code>common.valid</code>	Status of ephemeris, 1 = valid, 0 = invalid
23	1	u8		<code>common.health</code>	Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid
24	8	double	s	<code>tgdt</code>	Group delay differential between L1 and L2
32	8	double	m	<code>c_rsr</code>	Amplitude of the sine harmonic correction term to the orbit radius
40	8	double	m	<code>c_rsc</code>	Amplitude of the cosine harmonic correction term to the orbit radius
48	8	double	rad	<code>c_ucr</code>	Amplitude of the cosine harmonic correction term to the argument of latitude
56	8	double	rad	<code>c_usr</code>	Amplitude of the sine harmonic correction term to the argument of latitude
64	8	double	rad	<code>c_icr</code>	Amplitude of the cosine harmonic correction term to the angle of inclination
72	8	double	rad	<code>c_isr</code>	Amplitude of the sine harmonic correction term to the angle of inclination
80	8	double	rad/s	<code>dn</code>	Mean motion difference
88	8	double	rad	<code>m0</code>	Mean anomaly at reference time
96	8	double		<code>ecc</code>	Eccentricity of satellite orbit
104	8	double	$m^{(1/2)}$	<code>sqrta</code>	Square root of the semi-major axis of orbit
112	8	double	rad	<code>omega0</code>	Longitude of ascending node of orbit plane at weekly epoch
120	8	double	rad/s	<code>omegadot</code>	Rate of right ascension
128	8	double	rad	<code>w</code>	Argument of perigee
136	8	double	rad	<code>inc</code>	Inclination
144	8	double	rad/s	<code>inc_dot</code>	Inclination first derivative
152	8	double	s	<code>af0</code>	Polynomial clock correction coefficient (clock bias)
160	8	double	s/s	<code>af1</code>	Polynomial clock correction coefficient (clock drift)
168	8	double	s/s ²	<code>af2</code>	Polynomial clock correction coefficient (rate of clock drift)
176	4	u32	ms	<code>toc.tow</code>	Milliseconds since start of GPS week
180	2	u16	week	<code>toc.wn</code>	GPS week number
182	1	u8		<code>iode</code>	Issue of ephemeris data
183	2	u16		<code>iodc</code>	Issue of clock data
185					Total Payload Length

Table 6.3.10: MSG_EPHEMERIS_GPS_DEP_E 0x0081 message structure



Field 6.3.3: Signal constellation, band and code
(`common.sid.code`)

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P


Table 6.3.11: values (`common.sid.code[0:7]`)

MSG_EPHEMERIS_GPS — 0x0086 — 134

The ephemeris message returns a set of satellite orbit parameters that is used to calculate GPS satellite position, velocity, and clock offset. Please see the Navstar GPS Space Segment/Navigation user interfaces (ICD-GPS-200, Table 20-III) for more details.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8		common.sid.sac	Constellation-specific satellite identifier
1	1	u8		common.sid.cob	Signal constellation, band and code
2	4	u32	s	common.toe.tow	Seconds since start of GPS week
6	2	u16	week	common.toe.wn	GPS week number
8	8	double	m	common.ura	User Range Accuracy
16	4	u32	s	common.fit.int	Curve fit interval
20	1	u8		common.valid	Status of ephemeris, 1 = valid, 0 = invalid
21	1	u8		common.health	Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid
22	8	double	s	tgd	Group delay differential between L1 and L2
30	8	double	m	c_rs	Amplitude of the sine harmonic correction term to the orbit radius
38	8	double	m	c_rc	Amplitude of the cosine harmonic correction term to the orbit radius
46	8	double	rad	c_uc	Amplitude of the cosine harmonic correction term to the argument of latitude
54	8	double	rad	c_us	Amplitude of the sine harmonic correction term to the argument of latitude
62	8	double	rad	c_ic	Amplitude of the cosine harmonic correction term to the angle of inclination
70	8	double	rad	c_is	Amplitude of the sine harmonic correction term to the angle of inclination
78	8	double	rad/s	dn	Mean motion difference
86	8	double	rad	m0	Mean anomaly at reference time
94	8	double		ecc	Eccentricity of satellite orbit
102	8	double	m ^(1/2)	sqrta	Square root of the semi-major axis of orbit
110	8	double	rad	omega0	Longitude of ascending node of orbit plane at weekly epoch
118	8	double	rad/s	omegadot	Rate of right ascension
126	8	double	rad	w	Argument of perigee
134	8	double	rad	inc	Inclination
142	8	double	rad/s	inc_dot	Inclination first derivative
150	8	double	s	af0	Polynomial clock correction coefficient (clock bias)
158	8	double	s/s	af1	Polynomial clock correction coefficient (clock drift)
166	8	double	s/s ²	af2	Polynomial clock correction coefficient (rate of clock drift)
174	4	u32	s	toc.tow	Seconds since start of GPS week
178	2	u16	week	toc.wn	GPS week number
180	1	u8		iode	Issue of ephemeris data
181	2	u16		iodc	Issue of clock data
183					Total Payload Length

Table 6.3.12: MSG_EPHEMERIS_GPS 0x0086 message structure



Field 6.3.4: Signal constellation, band and code
(`common.sid.code`)

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P

Table 6.3.13: values (`common.sid.code[0:7]`)

MSG_EPHEMERIS_SBAS_DEP_A — 0x0082 — 130

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	2	u16		common.sid.sat	Constellation-specific satellite identifier. Note: unlike GnssSignal, GPS satellites are encoded as (PRN - 1). Other constellations do not have this offset.
2	1	u8		common.sid.code	Signal constellation, band and code
3	1	u8		common.sid.reserved	Reserved
4	4	u32	ms	common.toe.toe	Milliseconds since start of GPS week
8	2	u16	week	common.toe.wn	GPS week number
10	8	double	m	common.ura	User Range Accuracy
18	4	u32	s	common.fit.interval	Curve fit interval
22	1	u8		common.valid	Status of ephemeris, 1 = valid, 0 = invalid
23	1	u8		common.health	Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid
24	24	double[3]	m	pos	Position of the GEO at time toe
48	24	double[3]	m/s	vel	Velocity of the GEO at time toe
72	24	double[3]	m/s^2	acc	Acceleration of the GEO at time toe
96	8	double	s	a_gf0	Time offset of the GEO clock w.r.t. SBAS Network Time
104	8	double	s/s	a_gf1	Drift of the GEO clock w.r.t. SBAS Network Time
112					Total Payload Length

Table 6.3.14: MSG_EPHEMERIS_SBAS_DEP_A 0x0082 message structure

(Table 6.3.15)

7

0

Field 6.3.5: Signal constellation, band and code (common.sid.code)

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P

Table 6.3.15: values (common.sid.code[0:7])

MSG_EPHEMERIS_GLO_DEP_A — 0x0083 — 131

The ephemeris message returns a set of satellite orbit parameters that is used to calculate GLO satellite position, velocity, and clock offset. Please see the GLO ICD 5.1 "Table 4.5 Characteristics of words of immediate information (ephemeris parameters)" for more details.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	2	u16		common.sid.sat	Constellation-specific satellite identifier. Note: unlike GnssSignal, GPS satellites are encoded as (PRN - 1). Other constellations do not have this offset.
2	1	u8		common.sid.code	Signal constellation, band and code
3	1	u8		common.sid.reserved	Reserved
4	4	u32	ms	common.toe.tb	Milliseconds since start of GPS week
8	2	u16	week	common.toe.wn	GPS week number
10	8	double	m	common.ura	User Range Accuracy
18	4	u32	s	common.fit.int	Curve fit interval
22	1	u8		common.valid	Status of ephemeris, 1 = valid, 0 = invalid
23	1	u8		common.health	Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid
24	8	double		gamma	Relative deviation of predicted carrier frequency from nominal
32	8	double	s	tau	Correction to the SV time
40	24	double[3]	m	pos	Position of the SV at tb in PZ-90.02 coordinates system
64	24	double[3]	m/s	vel	Velocity vector of the SV at tb in PZ-90.02 coordinates system
88	24	double[3]	m/s^2	acc	Acceleration vector of the SV at tb in PZ-90.02 coordinates sys
112					Total Payload Length

Table 6.3.16: MSG_EPHEMERIS_GLO_DEP_A 0x0083 message structure

(Table 6.3.17)

7

0

Field 6.3.6: Signal constellation, band and code (common.sid.code)

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P

Table 6.3.17: values (common.sid.code[0:7])

MSG_EPHEMERIS_SBAS — 0x0084 — 132

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8		common.sid.sat	Constellation-specific satellite identifier
1	1	u8		common.sid.code	Signal constellation, band and code
2	4	u32	s	common.toe.toe	Seconds since start of GPS week
6	2	u16	week	common.toe.wn	GPS week number
8	8	double	m	common.ura	User Range Accuracy
16	4	u32	s	common.fit.int	Curve fit interval
20	1	u8		common.valid	Status of ephemeris, 1 = valid, 0 = invalid
21	1	u8		common.health	Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid
22	24	double[3]	m	pos	Position of the GEO at time toe
46	24	double[3]	m/s	vel	Velocity of the GEO at time toe
70	24	double[3]	m/s^2	acc	Acceleration of the GEO at time toe
94	8	double	s	a_gf0	Time offset of the GEO clock w.r.t. SBAS Network Time
102	8	double	s/s	a_gf1	Drift of the GEO clock w.r.t. SBAS Network Time
110					Total Payload Length

Table 6.3.18: MSG_EPHEMERIS_SBAS 0x0084 message structure

(Table 6.3.19)

7

0

Field 6.3.7: Signal constellation, band and code (common.sid.code)

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P

Table 6.3.19: values (common.sid.code[0:7])

MSG_EPHEMERIS_GLO_DEP_B — 0x0085 — 133

The ephemeris message returns a set of satellite orbit parameters that is used to calculate GLO satellite position, velocity, and clock offset. Please see the GLO ICD 5.1 "Table 4.5 Characteristics of words of immediate information (ephemeris parameters)" for more details.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8		common.sid.sat	Constellation-specific satellite identifier
1	1	u8		common.sid.code	Signal constellation, band and code
2	4	u32	s	common.toe.to	Seconds since start of GPS week
6	2	u16	week	common.toe.wn	GPS week number
8	8	double	m	common.ura	User Range Accuracy
16	4	u32	s	common.fit.int	Curve fit interval
20	1	u8		common.valid	Status of ephemeris, 1 = valid, 0 = invalid
21	1	u8		common.health	Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid
22	8	double		gamma	Relative deviation of predicted carrier frequency from nominal
30	8	double	s	tau	Correction to the SV time
38	24	double[3]	m	pos	Position of the SV at tb in PZ-90.02 coordinates system
62	24	double[3]	m/s	vel	Velocity vector of the SV at tb in PZ-90.02 coordinates system
86	24	double[3]	m/s^2	acc	Acceleration vector of the SV at tb in PZ-90.02 coordinates sys
110					Total Payload Length

Table 6.3.20: MSG_EPHEMERIS_GLO_DEP_B 0x0085 message structure

(Table 6.3.21)

7

0

Field 6.3.8: Signal constellation, band and code (common.sid.code)

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P

Table 6.3.21: values (common.sid.code[0:7])

MSG_EPHEMERIS_GLO_DEP_C — 0x0087 — 135

The ephemeris message returns a set of satellite orbit parameters that is used to calculate GLO satellite position, velocity, and clock offset. Please see the GLO ICD 5.1 "Table 4.5 Characteristics of words of immediate information (ephemeris parameters)" for more details.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8		common.sid.sat	Constellation-specific satellite identifier
1	1	u8		common.sid.code	Signal constellation, band and code
2	4	u32	s	common.toe.to	Seconds since start of GPS week
6	2	u16	week	common.toe.wn	GPS week number
8	8	double	m	common.ura	User Range Accuracy
16	4	u32	s	common.fit.int	Curve fit interval
20	1	u8		common.valid	Status of ephemeris, 1 = valid, 0 = invalid
21	1	u8		common.health	Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid
22	8	double		gamma	Relative deviation of predicted carrier frequency from nominal
30	8	double	s	tau	Correction to the SV time
38	8	double	s	d_tau	Equipment delay between L1 and L2
46	24	double[3]	m	pos	Position of the SV at tb in PZ-90.02 coordinates system
70	24	double[3]	m/s	vel	Velocity vector of the SV at tb in PZ-90.02 coordinates system
94	24	double[3]	m/s^2	acc	Acceleration vector of the SV at tb in PZ-90.02 coordinates sys
118	1	u8		fcn	Frequency slot. FCN+8 (that is [1..14]). 0 or 0xFF for invalid
119					Total Payload Length

Table 6.3.22: MSG_EPHEMERIS_GLO_DEP_C 0x0087 message structure

(Table 6.3.23)

7

0

Field 6.3.9: Signal constellation, band and code (common.sid.code)

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P

Table 6.3.23: values (common.sid.code[0:7])

MSG_EPHEMERIS_GLO — 0x0088 — 136

The ephemeris message returns a set of satellite orbit parameters that is used to calculate GLO satellite position, velocity, and clock offset. Please see the GLO ICD 5.1 "Table 4.5 Characteristics of words of immediate information (ephemeris parameters)" for more details.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8		common.sid.sat	Constellation-specific satellite identifier
1	1	u8		common.sid.code	Signal constellation, band and code
2	4	u32	s	common.toe.to	Seconds since start of GPS week
6	2	u16	week	common.toe.wn	GPS week number
8	8	double	m	common.ura	User Range Accuracy
16	4	u32	s	common.fit.int	Curve fit interval
20	1	u8		common.valid	Status of ephemeris, 1 = valid, 0 = invalid
21	1	u8		common.health	Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid
22	8	double		gamma	Relative deviation of predicted carrier frequency from nominal
30	8	double	s	tau	Correction to the SV time
38	8	double	s	d_tau	Equipment delay between L1 and L2
46	24	double[3]	m	pos	Position of the SV at tb in PZ-90.02 coordinates system
70	24	double[3]	m/s	vel	Velocity vector of the SV at tb in PZ-90.02 coordinates system
94	24	double[3]	m/s^2	acc	Acceleration vector of the SV at tb in PZ-90.02 coordinates sys
118	1	u8		fcn	Frequency slot. FCN+8 (that is [1..14]). 0 or 0xFF for invalid
119	1	u8		iod	Issue of ephemeris data
					120
					Total Payload Length

Table 6.3.24: MSG_EPHEMERIS_GLO 0x0088 message structure

(Table 6.3.25)

7

0

Field 6.3.10: Signal constellation, band and code (common.sid.code)

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P

Table 6.3.25: values (common.sid.code[0:7])

MSG_IONO — 0x0090 — 144

The ionospheric parameters which allow the "L1 only" or "L2 only" user to utilize the ionospheric model for computation of the ionospheric delay. Please see ICD-GPS-200 (Chapter 20.3.3.5.1.7) for more details.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	s	t _{nmct} .tow	Seconds since start of GPS week
4	2	u16	week	t _{nmct} .wn	GPS week number
6	8	double	s	a0	
14	8	double	s/semi-circle	a1	
22	8	double	s/(semi-circle) ²	a2	
30	8	double	s/(semi-circle) ³	a3	
38	8	double	s	b0	
46	8	double	s/semi-circle	b1	
54	8	double	s/(semi-circle) ²	b2	
62	8	double	s/(semi-circle) ³	b3	
70					Total Payload Length

Table 6.3.26: MSG_IONO 0x0090 message structure

MSG_SV_CONFIGURATION_GPS — 0x0091 — 145

Please see ICD-GPS-200 (Chapter 20.3.3.5.1.4) for more details.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	s	t_nmct.tow	Seconds since start of GPS week
4	2	u16	week	t_nmct.wn	GPS week number
6	4	u32		l2c_mask	L2C capability mask, SV32 bit being MSB, SV1 bit being LSB
	10				Total Payload Length

Table 6.3.27: MSG_SV_CONFIGURATION_GPS 0x0091 message structure

MSG_GROUP_DELAY_DEP_A — 0x0092 — 146

Please see ICD-GPS-200 (30.3.3.3.1.1) for more details.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	t _{op} .tow	Milliseconds since start of GPS week
4	2	u16	week	t _{op} .wn	GPS week number
6	1	u8		prn	Satellite number
7	1	u8		valid	bit-field indicating validity of the values, LSB indicating tgd validity etc. 1 = value is valid, 0 = value is not valid.
8	2	s16	s * 2 ⁻³⁵	tgd	
10	2	s16	s * 2 ⁻³⁵	isc _{11ca}	
12	2	s16	s * 2 ⁻³⁵	isc _{12c}	
14					Total Payload Length

Table 6.3.28: MSG_GROUP_DELAY_DEP_A 0x0092 message structure

MSG_GROUP_DELAY_DEP_B — 0x0093 — 147

Please see ICD-GPS-200 (30.3.3.3.1.1) for more details.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	s	t_op.tow	Seconds since start of GPS week
4	2	u16	week	t_op.wn	GPS week number
6	2	u16		sid.sat	Constellation-specific satellite identifier. Note: unlike GnssSignal, GPS satellites are encoded as (PRN - 1). Other constellations do not have this offset.
8	1	u8		sid.code	Signal constellation, band and code
9	1	u8		sid.reserved	Reserved
10	1	u8		valid	bit-field indicating validity of the values, LSB indicating tgd validity etc. 1 = value is valid, 0 = value is not valid.
11	2	s16	s * 2 ⁻³⁵	tgd	
13	2	s16	s * 2 ⁻³⁵	isc_l1ca	
15	2	s16	s * 2 ⁻³⁵	isc_l2c	
17					Total Payload Length

Table 6.3.29: MSG_GROUP_DELAY_DEP_B 0x0093 message structure

(Table 6.3.30)

7

0

Field 6.3.11: Signal constellation, band and code (sid.code)

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P

Table 6.3.30: values (sid.code[0:7])

MSG_GROUP_DELAY — 0x0094 — 148

Please see ICD-GPS-200 (30.3.3.3.1.1) for more details.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	s	t_op.tow	Seconds since start of GPS week
4	2	u16	week	t_op.wn	GPS week number
6	1	u8		sid.sat	Constellation-specific satellite identifier
7	1	u8		sid.code	Signal constellation, band and code
8	1	u8		valid	bit-field indicating validity of the values, LSB indicating tgd validity etc. 1 = value is valid, 0 = value is not valid.
9	2	s16	s * 2 ⁻³⁵	tgd	
11	2	s16	s * 2 ⁻³⁵	isc_l1ca	
13	2	s16	s * 2 ⁻³⁵	isc_l2c	
15					Total Payload Length

Table 6.3.31: MSG_GROUP_DELAY 0x0094 message structure

(Table 6.3.32)

7

0

Field 6.3.12: Signal constellation, band and code (sid.code)

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P


Table 6.3.32: values (sid.code[0:7])

MSG_ALMANAC_GPS — 0x0072 — 114

The almanac message returns a set of satellite orbit parameters. Almanac data is not very precise and is considered valid for up to several months. Please see the Navstar GPS Space Segment/Navigation user interfaces (ICD-GPS-200, Chapter 20.3.3.5.1.2 Almanac Data) for more details.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8		common.sid.sac	Constellation-specific satellite identifier
1	1	u8		common.sid.co	Signal constellation, band and code
2	4	u32	s	common.toa.to	Seconds since start of GPS week
6	2	u16	week	common.toa.wn	GPS week number
8	8	double	m	common.ura	User Range Accuracy
16	4	u32	s	common.fit.int	Curve fit interval
20	1	u8		common.valid	Status of almanac, 1 = valid, 0 = invalid
21	1	u8		common.health	Satellite health status for GPS: - bits 5-7: NAV data health status. See IS-GPS-200H Table 20-VII: NAV Data Health Indications. - bits 0-4: Signal health status. See IS-GPS-200H Table 20-VIII. Codes for Health of SV Signal Components. Satellite health status for GLO: See GLO ICD 5.1 table 5.1 for details - bit 0: C(n), "unhealthy" flag that is transmitted within non-immediate data and indicates overall constellation status at the moment of almanac uploading. '0' indicates malfunction of n-satellite. '1' indicates that n-satellite is operational. - bit 1: Bn(ln), '0' indicates the satellite is operational and suitable for navigation.
22	8	double	rad	m0	Mean anomaly at reference time
30	8	double		ecc	Eccentricity of satellite orbit
38	8	double	$m^{(1/2)}$	sqrta	Square root of the semi-major axis of orbit
46	8	double	rad	omega0	Longitude of ascending node of orbit plane at weekly epoch
54	8	double	rad/s	omegadot	Rate of right ascension
62	8	double	rad	w	Argument of perigee
70	8	double	rad	inc	Inclination
78	8	double	s	af0	Polynomial clock correction coefficient (clock bias)
86	8	double	s/s	af1	Polynomial clock correction coefficient (clock drift)
94					Total Payload Length

Table 6.3.33: MSG_ALMANAC_GPS 0x0072 message structure



Field 6.3.13: Signal constellation, band and code
(`common.sid.code`)

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P


Table 6.3.34: values (`common.sid.code[0:7]`)

MSG_ALMANAC_GLO — 0x0073 — 115

The almanac message returns a set of satellite orbit parameters. Almanac data is not very precise and is considered valid for up to several months. Please see the GLO ICD 5.1 "Chapter 4.5 Non-immediate information and almanac" for details.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8		common.sid.sac	Constellation-specific satellite identifier
1	1	u8		common.sid.code	Signal constellation, band and code
2	4	u32	s	common.toa.to	Seconds since start of GPS week
6	2	u16	week	common.toa.wn	GPS week number
8	8	double	m	common.ura	User Range Accuracy
16	4	u32	s	common.fit.int	Curve fit interval
20	1	u8		common.valid	Status of almanac, 1 = valid, 0 = invalid
21	1	u8		common.health	Satellite health status for GPS: - bits 5-7: NAV data health status. See IS-GPS-200H Table 20-VII: NAV Data Health Indications. - bits 0-4: Signal health status. See IS-GPS-200H Table 20-VIII. Codes for Health of SV Signal Components. Satellite health status for GLO: See GLO ICD 5.1 table 5.1 for details - bit 0: C(n), "unhealthy" flag that is transmitted within non-immediate data and indicates overall constellation status at the moment of almanac uploading. '0' indicates malfunction of n-satellite. '1' indicates that n-satellite is operational. - bit 1: Bn(ln), '0' indicates the satellite is operational and suitable for navigation.
22	8	double	rad	lambda_na	Longitude of the first ascending node of the orbit in PZ-90.02 coordinate system
30	8	double	s	t_lambda_na	Time of the first ascending node passage
38	8	double	rad	i	Value of inclination at instant of t_lambda
46	8	double	s/orbital period	t	Value of Draconian period at instant of t_lambda
54	8	double	s/(orbital period ²)	t_dot	Rate of change of the Draconian period
62	8	double		epsilon	Eccentricity at instant of t_lambda
70	8	double	rad	omega	Argument of perigee at instant of t_lambda
78					Total Payload Length

Table 6.3.35: MSG_ALMANAC_GLO 0x0073 message structure



Field 6.3.14: Signal constellation, band and code
(`common.sid.code`)

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P

Table 6.3.36: values (`common.sid.code[0:7]`)

MSG_GLO_BIASES — 0x0075 — 117

The GLONASS L1/L2 Code-Phase biases allows to perform GPS+GLONASS integer ambiguity resolution for baselines with mixed receiver types (e.g. receiver of different manufacturers)

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8	boolean	mask	GLONASS FDMA signals mask
1	2	s16	m * 0.02	l1ca_bias	GLONASS L1 C/A Code-Phase Bias
3	2	s16	m * 0.02	l1p_bias	GLONASS L1 P Code-Phase Bias
5	2	s16	m * 0.02	l2ca_bias	GLONASS L2 C/A Code-Phase Bias
7	2	s16	m * 0.02	l2p_bias	GLONASS L2 P Code-Phase Bias
9					Total Payload Length

Table 6.3.37: MSG_GLO_BIASES 0x0075 message structure

6.4 Settings

Messages for reading and writing the device's device settings.

Note that some of these messages share the same message type ID for both the host request and the device response. See the accompanying document for descriptions of settings configurations and examples:

<https://github.com/swift-nav/piksi/blob/master/docs/settings.pdf>

MSG_SETTINGS_SAVE — 0x00A1 — 161

The save settings message persists the device's current settings configuration to its onboard flash memory file system.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
	0				Total Payload Length

Table 6.4.1: MSG_SETTINGS_SAVE 0x00A1 message structure

MSG_SETTINGS_WRITE — 0x00A0 — 160

The setting message writes the device configuration.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	<i>N</i>	string		<code>setting</code>	A NULL-terminated and delimited string with contents [SECTION_SETTING, SETTING, VALUE]. A device will only process to this message when it is received from sender ID 0x42.
	<i>N</i>				Total Payload Length

Table 6.4.2: MSG_SETTINGS_WRITE 0x00A0 message structure

MSG.SETTINGS.READ.REQ — 0x00A4 — 164

The setting message reads the device configuration.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	<i>N</i>	string		<code>setting</code>	A NULL-terminated and delimited string with contents [SECTION_SETTING, SETTING]. A device will only respond to this message when it is received from sender ID 0x42.
	<i>N</i>				Total Payload Length

Table 6.4.3: MSG.SETTINGS.READ.REQ 0x00A4 message structure

MSG_SETTINGS_READ_RESP — 0x00A5 — 165

The setting message reads the device configuration.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	<i>N</i>	string		<code>setting</code>	A NULL-terminated and delimited string with contents [SECTION_SETTING, SETTING, VALUE].
	<i>N</i>				Total Payload Length

Table 6.4.4: MSG_SETTINGS_READ_RESP 0x00A5 message structure

MSG_SETTINGS_READ_BY_INDEX_REQ — 0x00A2 — 162

The settings message for iterating through the settings values. It will read the setting at an index, returning a NULL-terminated and delimited string with contents [SECTION_SETTING, SETTING, VALUE]. A device will only respond to this message when it is received from sender ID 0x42.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	2	u16		index	An index into the device settings, with values ranging from 0 to length(settings)
	2				Total Payload Length

Table 6.4.5: MSG_SETTINGS_READ_BY_INDEX_REQ 0x00A2 message structure

MSG_SETTINGS_READ_BY_INDEX_RESP — 0x00A7 — 167

The settings message for iterating through the settings values. It will read the setting at an index, returning a NULL-terminated and delimited string with contents [SECTION_SETTING, SETTING, VALUE].

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	2	u16		index	An index into the device settings, with values ranging from 0 to length(settings)
2	<i>N</i>	string		setting	A NULL-terminated and delimited string with contents [SECTION_SETTING, SETTING, VALUE].
	<i>N + 2</i>				Total Payload Length

Table 6.4.6: MSG_SETTINGS_READ_BY_INDEX_RESP 0x00A7 message structure

MSG_SETTINGS_READ_BY_INDEX_DONE — 0x00A6 — 166

The settings message for indicating end of the settings values.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
	0				Total Payload Length

Table 6.4.7: MSG_SETTINGS_READ_BY_INDEX_DONE 0x00A6 message structure

6.5 System


Standardized system messages from Swift Navigation devices.

MSG_STARTUP — 0xFF00 — 65280

The system start-up message is sent once on system start-up. It notifies the host or other attached devices that the system has started and is now ready to respond to commands or configuration requests.


Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8		cause	Cause of startup
1	1	u8		startup_type	Startup type
2	2	u16		reserved	Reserved
					Total Payload Length

Table 6.5.1: MSG_STARTUP 0xFF00 message structure

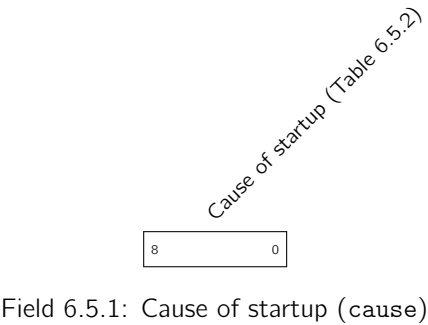

Value	Description
0	Power on
1	Software reset
2	Watchdog reset

Table 6.5.2: Cause of startup values (cause[0:8])

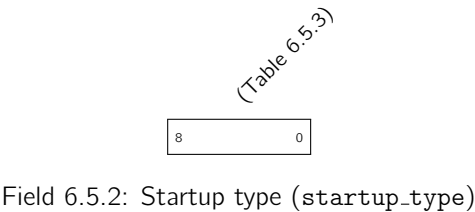

Value	Description
0	Cold start
1	Warm start
2	Hot start


Table 6.5.3: values (startup_type[0:8])

MSG_DGNSS_STATUS — 0xFF02 — 65282

This message provides information about the receipt of Differential corrections. It is expected to be sent with each receipt of a complete corrections packet.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8	deci-seconds	flags	Status flags
1	2	u16		latency	Latency of observation receipt
3	1	u8		num_signals	Number of signals from base station
4	N	string		source	Corrections source string
N + 4					Total Payload Length

Table 6.5.4: MSG_DGNSS_STATUS 0xFF02 message structure

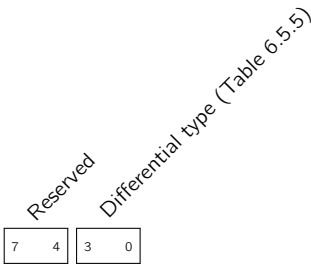

Field 6.5.3: Status flags (flags)

Value	Description
0	Invalid
1	Code Difference
2	RTK

Table 6.5.5: Differential type values (flags[0:3])

MSG_HEARTBEAT — 0xFFFF — 65535

The heartbeat message is sent periodically to inform the host or other attached devices that the system is running. It is used to monitor system malfunctions. It also contains status flags that indicate to the host the status of the system and whether it is operating correctly. Currently, the expected heartbeat interval is 1 sec.

The system error flag is used to indicate that an error has occurred in the system. To determine the source of the error, the remaining error flags should be inspected.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32		flags	Status flags
	4				Total Payload Length

Table 6.5.6: MSG_HEARTBEAT 0xFFFF message structure

Value	Description
0	System Healthy
1	An error has occurred

Table 6.5.7: System Error Flag values (flags[0])

Value	Description
0	System Healthy
1	An IO error has occurred


Table 6.5.8: IO Error values (flags[1])

Value	Description
0	System Healthy
1	An error has occurred in the SwiftNAP

Table 6.5.9: SwiftNAP Error values (flags[2])

Value	Description
0	No external antenna detected
1	External antenna is present

Table 6.5.10: External antenna present values (flags[31])

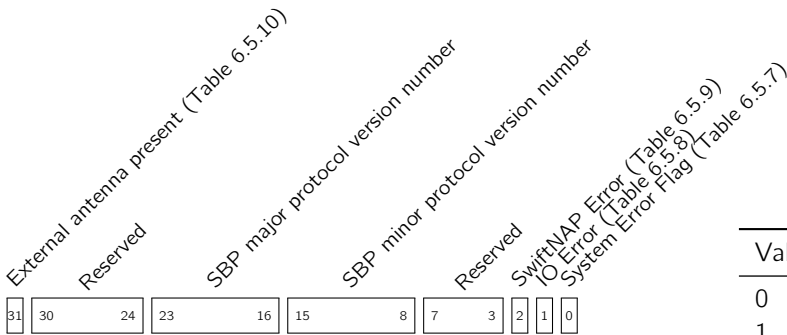

Field 6.5.4: Status flags (flags)

7 Draft Message Definitions

7.1 Acquisition


Satellite acquisition messages from the device.

MSG_ACQ_RESULT — 0x002F — 47

This message describes the results from an attempted GPS signal acquisition search for a satellite PRN over a code phase/carrier frequency range. It contains the parameters of the point in the acquisition search space with the best carrier-to-noise (CN/0) ratio.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	float	dB Hz	cn0	CN/0 of best point
4	4	float	chips	cp	Code phase of best point
8	4	float	hz	cf	Carrier frequency of best point
12	1	u8		sid.sat	Constellation-specific satellite identifier
13	1	u8		sid.code	Signal constellation, band and code
14					Total Payload Length

Table 7.1.1: MSG_ACQ_RESULT 0x002F message structure



Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P

Field 7.1.1: Signal constellation, band and code (sid.code)

Table 7.1.2: values (sid.code[0:7])

MSG_ACQ_SV_PROFILE — 0x002E — 46

The message describes all SV profiles during acquisition time. The message is used to debug and measure the performance.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
$33N + 0$	1	u8		<code>acq_sv_profile[N].job_type</code>	SV search job type (deep, fallback, etc)
$33N + 1$	1	u8		<code>acq_sv_profile[N].status</code>	Acquisition status 1 is Success, 0 is Failure
$33N + 2$	2	u16	dB-Hz*10	<code>acq_sv_profile[N].cn0</code>	CN0 value. Only valid if status is '1'
$33N + 4$	1	u8	ms	<code>acq_sv_profile[N].int_time</code>	Acquisition integration time
$33N + 5$	1	u8		<code>acq_sv_profile[N].sid.sat</code>	Constellation-specific satellite identifier
$33N + 6$	1	u8		<code>acq_sv_profile[N].sid.code</code>	Signal constellation, band and code
$33N + 7$	2	u16	Hz	<code>acq_sv_profile[N].bin_width</code>	Acq frequency bin width
$33N + 9$	4	u32	ms	<code>acq_sv_profile[N].timestamp</code>	Timestamp of the job complete event
$33N + 13$	4	u32	us	<code>acq_sv_profile[N].time_spent</code>	Time spent to search for sid.code
$33N + 17$	4	s32	Hz	<code>acq_sv_profile[N].cf_min</code>	Doppler range lowest frequency
$33N + 21$	4	s32	Hz	<code>acq_sv_profile[N].cf_max</code>	Doppler range highest frequency
$33N + 25$	4	s32	Hz	<code>acq_sv_profile[N].cf</code>	Doppler value of detected peak. Only valid if status is '1'
$33N + 29$	4	u32	chips*10	<code>acq_sv_profile[N].cp</code>	Codephase of detected peak. Only valid if status is '1'
$33N$					Total Payload Length

Table 7.1.3: MSG_ACQ_SV_PROFILE 0x002E message structure

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P

Field 7.1.2: Signal constellation, band and code (`acq_sv_profile[N].sid.code`)

Table 7.1.4: values (`acq_sv_profile[N].sid.code[0:7]`)

7.2 Ext Events

Messages reporting accurately-timestamped external events, e.g. camera shutter time.

MSG_EXT_EVENT — 0x0101 — 257

Reports detection of an external event, the GPS time it occurred, which pin it was and whether it was rising or falling.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	2	u16	weeks	wn	GPS week number
2	4	u32	ms	tow	GPS time of week rounded to the nearest millisecond
6	4	s32	ns	ns_residual	Nanosecond residual of millisecond-rounded TOW (ranges from -500000 to 500000)
10	1	u8		flags	Flags
11	1	u8		pin	Pin number. 0..9 = DEBUG0..9.
12					Total Payload Length


Table 7.2.1: MSG_EXT_EVENT 0x0101 message structure

Value	Description
0	Low (falling edge)
1	High (rising edge)

Table 7.2.2: New level of pin values (flags[0])

Value	Description
0	Unknown - don't have nav solution
1	Good (i 1 microsecond)

Table 7.2.3: Time quality values (flags[1])

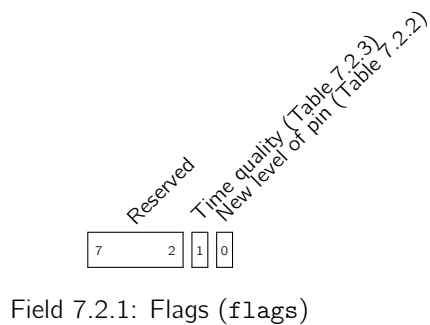

7.3 File IO

Messages for using device's onboard flash filesystem functionality. This allows data to be stored persistently in the device's program flash with wear-levelling using a simple filesystem interface. The file system interface (CFS) defines an abstract API for reading directories and for reading and writing files.

Note that some of these messages share the same message type ID for both the host request and the device response.

MSG_FILEIO_READ_REQ — 0x00A8 — 168

The file read message reads a certain length (up to 255 bytes) from a given offset into a file, and returns the data in a MSG_FILEIO_READ_RESP message where the message length field indicates how many bytes were successfully read. The sequence number in the request will be returned in the response. If the message is invalid, a followup MSG_PRINT message will print "Invalid fileio read message". A device will only respond to this message when it is received from sender ID 0x42.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32		<code>sequence</code>	Read sequence number
4	4	u32	bytes	<code>offset</code>	File offset
8	1	u8	bytes	<code>chunk_size</code>	Chunk size to read
9	<i>N</i>	string		<code>filename</code>	Name of the file to read from
<i>N + 9</i>					Total Payload Length

Table 7.3.1: MSG_FILEIO_READ_REQ 0x00A8 message structure

MSG_FILEIO_READ_RESP — 0x00A3 — 163

The file read message reads a certain length (up to 255 bytes) from a given offset into a file, and returns the data in a message where the message length field indicates how many bytes were successfully read. The sequence number in the response is preserved from the request.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32		sequence	Read sequence number
4	N	u8[N]		contents	Contents of read file
	$N + 4$				Total Payload Length

Table 7.3.2: MSG_FILEIO_READ_RESP 0x00A3 message structure

MSG_FILEIO_READ_DIR_REQ — 0x00A9 — 169

The read directory message lists the files in a directory on the device's onboard flash file system. The offset parameter can be used to skip the first n elements of the file list. Returns a MSG_FILEIO_READ_DIR_RESP message containing the directory listings as a NULL delimited list. The listing is chunked over multiple SBP packets. The sequence number in the request will be returned in the response. If message is invalid, a followup MSG_PRINT message will print "Invalid fileio read message". A device will only respond to this message when it is received from sender ID 0x42.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32		sequence	Read sequence number
4	4	u32		offset	The offset to skip the first n elements of the file list
8	N	string		dirname	Name of the directory to list
	$N + 8$				Total Payload Length

Table 7.3.3: MSG_FILEIO_READ_DIR_REQ 0x00A9 message structure

MSG_FILEIO_READ_DIR_RESP — 0x00AA — 170

The read directory message lists the files in a directory on the device's onboard flash file system. Message contains the directory listings as a NULL delimited list. The listing is chunked over multiple SBP packets and the end of the list is identified by an entry containing just the character 0xFF. The sequence number in the response is preserved from the request.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32		sequence	Read sequence number
4	N	u8[N]		contents	Contents of read directory
	$N + 4$				Total Payload Length

Table 7.3.4: MSG_FILEIO_READ_DIR_RESP 0x00AA message structure

MSG_FILEIO_REMOVE — 0x00AC — 172

The file remove message deletes a file from the file system. If the message is invalid, a followup MSG_PRINT message will print "Invalid fileio remove message". A device will only process this message when it is received from sender ID 0x42.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	<i>N</i>	string		<code>filename</code>	Name of the file to delete
	<i>N</i>				Total Payload Length

Table 7.3.5: MSG_FILEIO_REMOVE 0x00AC message structure

MSG_FILEIO_WRITE_REQ — 0x00AD — 173

The file write message writes a certain length (up to 255 bytes) of data to a file at a given offset. Returns a copy of the original MSG_FILEIO_WRITE_RESP message to check integrity of the write. The sequence number in the request will be returned in the response. If message is invalid, a followup MSG_PRINT message will print "Invalid fileio write message". A device will only process this message when it is received from sender ID 0x42.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32		sequence	Write sequence number
4	4	u32	bytes	offset	Offset into the file at which to start writing in bytes
8	N	string		filename	Name of the file to write to
9	N	u8[N]		data	Variable-length array of data to write
$N + 9$					Total Payload Length

Table 7.3.6: MSG_FILEIO_WRITE_REQ 0x00AD message structure

MSG_FILEIO_WRITE_RESP — 0x00AB — 171

The file write message writes a certain length (up to 255 bytes) of data to a file at a given offset. The message is a copy of the original MSG_FILEIO_WRITE_REQ message to check integrity of the write. The sequence number in the response is preserved from the request.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32		<code>sequence</code>	Write sequence number
	4				Total Payload Length

Table 7.3.7: MSG_FILEIO_WRITE_RESP 0x00AB message structure

7.4 Imu

Inertial Measurement Unit (IMU) messages.

MSG_IMU_RAW — 0x0900 — 2304

Raw data from the Inertial Measurement Unit, containing accelerometer and gyroscope readings. The sense of the measurements are to be aligned with the indications on the device itself.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	tow	Milliseconds since start of GPS week. If the high bit is set, the time is unknown or invalid.
4	1	u8	ms / 256	tow_f	Milliseconds since start of GPS week, fractional part
5	2	s16		acc_x	Acceleration in the IMU frame X axis
7	2	s16		acc_y	Acceleration in the IMU frame Y axis
9	2	s16		acc_z	Acceleration in the IMU frame Z axis
11	2	s16		gyr_x	Angular rate around IMU frame X axis
13	2	s16		gyr_y	Angular rate around IMU frame Y axis
15	2	s16		gyr_z	Angular rate around IMU frame Z axis
17					Total Payload Length


Table 7.4.1: MSG_IMU_RAW 0x0900 message structure

MSG_IMU_AUX — 0x0901 — 2305

Auxiliary data specific to a particular IMU. The 'imu_type' field will always be consistent but the rest of the payload is device specific and depends on the value of 'imu_type'.


Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8		imu_type	IMU type
1	2	s16		temp	Raw IMU temperature
3	1	u8		imu_conf	IMU configuration
					Total Payload Length
					4

Table 7.4.2: MSG_IMU_AUX 0x0901 message structure

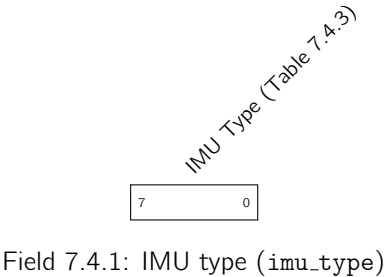

Value	Description
0	Bosch BMI160

Table 7.4.3: IMU Type values (imu_type[0:7])

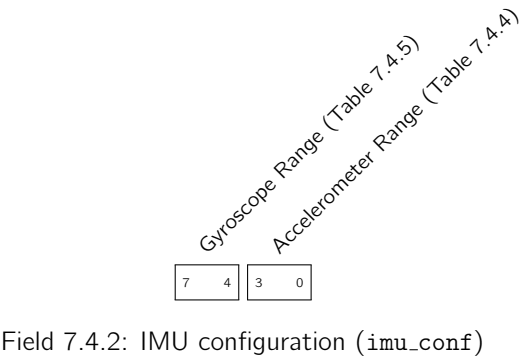

Value	Description
0	+/- 2g
1	+/- 4g
2	+/- 8g
3	+/- 16g

Table 7.4.4: Accelerometer Range values (imu_conf[0:3])

Value	Description
0	+/- 2000 deg / s
1	+/- 1000 deg / s
2	+/- 500 deg / s
3	+/- 250 deg / s
4	+/- 125 deg / s

Table 7.4.5: Gyroscope Range values (imu_conf[4:7])

7.5 Mag

Magnetometer (mag) messages.

MSG_MAG_RAW — 0x0902 — 2306

Raw data from the magnetometer.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	<code>tow</code>	Milliseconds since start of GPS week. If the high bit is set, the time is unknown or invalid.
4	1	u8	ms / 256	<code>tow_f</code>	Milliseconds since start of GPS week, fractional part
5	2	s16		<code>mag_x</code>	Magnetic field in the body frame X axis
7	2	s16		<code>mag_y</code>	Magnetic field in the body frame Y axis
9	2	s16		<code>mag_z</code>	Magnetic field in the body frame Z axis
	11				Total Payload Length

Table 7.5.1: MSG_MAG_RAW 0x0902 message structure

7.6 Orientation

Orientation Messages

MSG_BASELINE_HEADING — 0x020F — 527

This message reports the baseline heading pointing from the base station to the rover relative to True North. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow). It is intended that time-matched RTK mode is used when the base station is moving.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	tow	GPS Time of Week
4	4	u32	mdeg	heading	Heading
8	1	u8		n_sats	Number of satellites used in solution
9	1	u8		flags	Status flags
10					Total Payload Length

Table 7.6.1: MSG_BASELINE_HEADING 0x020F message structure



Field 7.6.1: Status flags (flags)

Value	Description
0	Invalid
1	Reserved
2	Differential GNSS (DGNSS)
3	Float RTK
4	Fixed RTK


Table 7.6.2: Fix mode values (flags[0:2])

MSG_ORIENT_QUAT — 0x0220 — 544

This message reports the quaternion vector describing the vehicle body frame's orientation with respect to a local-level NED frame.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	<code>tow</code>	GPS Time of Week
4	4	s32	N/A	<code>w</code>	Real component
8	4	s32	N/A	<code>x</code>	1st imaginary component
12	4	s32	N/A	<code>y</code>	2nd imaginary component
16	4	s32	N/A	<code>z</code>	3rd imaginary component
20	4	float	N/A	<code>acc_w</code>	Estimated standard deviation of w
24	4	float	N/A	<code>acc_x</code>	Estimated standard deviation of x
28	4	float	N/A	<code>acc_y</code>	Estimated standard deviation of y
32	4	float	N/A	<code>acc_z</code>	Estimated standard deviation of z
36	1	u8		<code>flags</code>	Status flags
					Total Payload Length
37					

Table 7.6.3: MSG_ORIENT_QUAT 0x0220 message structure

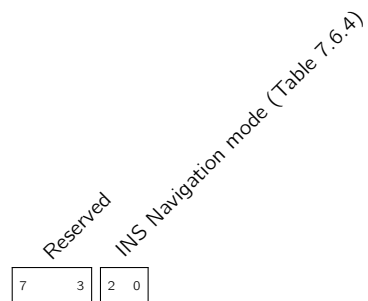Field 7.6.2: Status flags (`flags`)

Value	Description
0	None
1	INS only (Dead reckoning)
2	INS with GNSS
2	INS with GNSS Attitude


Table 7.6.4: INS Navigation mode values (`flags[0:2]`)

MSG_ORIENT_EULER — 0x0221 — 545

This message reports the yaw, pitch, and roll angles of the vehicle body frame. The rotations should applied intrinsically in the order yaw, pitch, and roll in order to rotate the from a frame aligned with the local-level NED frame to the vehicle body frame.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	tow	GPS Time of Week
4	2	s16	centidegrees	roll	rotation about the forward axis of the vehicle
6	2	s16	centidegrees	pitch	rotation about the rightward axis of the vehicle
8	2	s16	centidegrees	yaw	rotation about the downward axis of the vehicle
10	4	float	degrees	var_roll	Estimated standard deviation of roll
14	4	float	degrees	var_pitch	Estimated standard deviation of pitch
18	4	float	degrees	var_yaw	Estimated standard deviation of yaw
22	1	u8		flags	Status flags
23					Total Payload Length

Table 7.6.5: MSG_ORIENT_EULER 0x0221 message structure

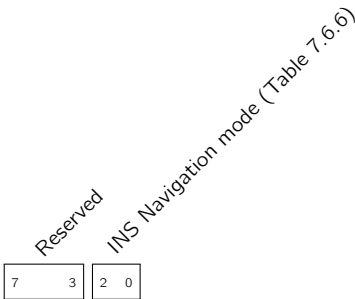

Field 7.6.3: Status flags (flags)

Value	Description
0	None
1	INS only (Dead reckoning)
2	INS with valid GNSS
3	INS with GNSS Attitude


Table 7.6.6: INS Navigation mode values (flags[0:2])

MSG_ANGULAR_RATE — 0x0222 — 546

This message reports the orientation rates in the vehicle body frame. The values represent the measurements a strapped down gyroscope would make and are not equivalent to the time derivative of the Euler angles. The orientation and origin of the user frame is specified via device settings. By convention, the vehicle x-axis is expected to be aligned with the forward direction, while the vehicle y-axis is expected to be aligned with the right direction, and the vehicle z-axis should be aligned with the down direction.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	tow	GPS Time of Week
4	2	s16	decidegrees/s	x	angular rate about x axis
6	2	s16	decidegrees/s	y	angular rate about y axis
8	2	s16	decidegrees/s	z	angular rate about z axis
10	1	u8		flags	Status flags
11					Total Payload Length

Table 7.6.7: MSG_ANGULAR_RATE 0x0222 message structure

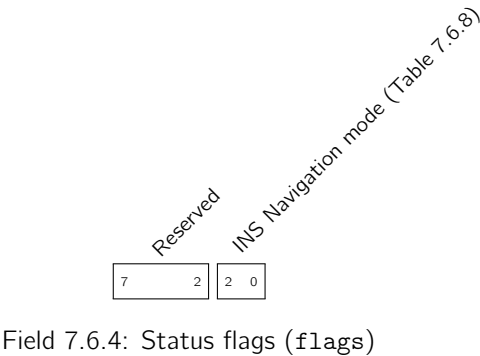

Field 7.6.4: Status flags (flags)

Value	Description
0	None
1	INS only (Dead reckoning)
2	INS with valid GNSS
3	INS with GNSS Attitude

Table 7.6.8: INS Navigation mode values (flags[0:2])

7.7 Piksi

System health, configuration, and diagnostic messages specific to the Piksi L1 receiver, including a variety of legacy messages that may no longer be used.

MSG_ALMANAC — 0x0069 — 105

This is a legacy message for sending and loading a satellite almanac onto the Piksi's flash memory from the host.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
	0				Total Payload Length

Table 7.7.1: MSG_ALMANAC 0x0069 message structure

MSG_SET_TIME — 0x0068 — 104

This message sets up timing functionality using a coarse GPS time estimate sent by the host.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
	0				Total Payload Length


Table 7.7.2: MSG_SET_TIME 0x0068 message structure

MSG_RESET — 0x00B6 — 182

This message from the host resets the Piksi back into the bootloader.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32		flags	Reset flags
	4				Total Payload Length

Table 7.7.3: MSG_RESET 0x00B6 message structure

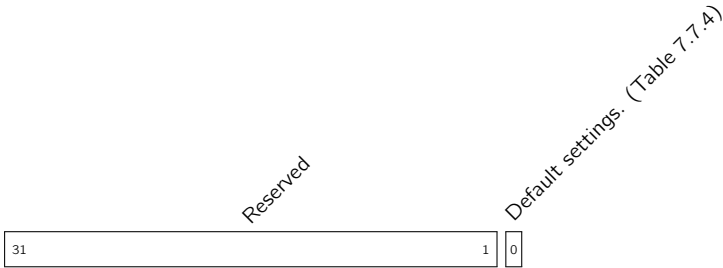

Field 7.7.1: Reset flags (flags)

Value	Description
0	Preserve existing settings.
1	Resore default settings.

Table 7.7.4: Default settings. values (flags[0])

MSG_RESET_DEP — 0x00B2 — 178

This message from the host resets the Piksi back into the bootloader.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
	0				Total Payload Length

Table 7.7.5: MSG_RESET_DEP 0x00B2 message structure

MSG_CW_RESULTS — 0x00C0 — 192

This is an unused legacy message for result reporting from the CW interference channel on the SwiftNAP. This message will be removed in a future release.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
	0				Total Payload Length

Table 7.7.6: MSG_CW_RESULTS 0x00C0 message structure

MSG_CW_START — 0x00C1 — 193

This is an unused legacy message from the host for starting the CW interference channel on the SwiftNAP. This message will be removed in a future release.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
	0				Total Payload Length


Table 7.7.7: MSG_CW_START 0x00C1 message structure

MSG_RESET_FILTERS — 0x0022 — 34

This message resets either the DGNSS Kalman filters or Integer Ambiguity Resolution (IAR) process.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8		filter	Filter flags
	1				Total Payload Length

Table 7.7.8: MSG_RESET_FILTERS 0x0022 message structure

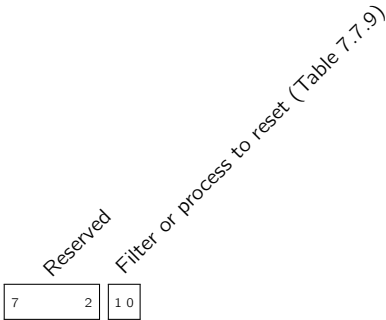

Field 7.7.2: Filter flags (`filter`)

Value	Description
0	DGNSS filter
1	IAR process
2	Inertial filter

Table 7.7.9: Filter or process to reset values (`filter[0:1]`)

MSG_INIT_BASE — 0x0023 — 35

This message initializes the integer ambiguity resolution (IAR) process on the Piksi to use an assumed baseline position between the base station and rover receivers. Warns via MSG_PRINT if there aren't a shared minimum number (4) of satellite observations between the two.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
	0				Total Payload Length

Table 7.7.10: MSG_INIT_BASE 0x0023 message structure

MSG_THREAD_STATE — 0x0017 — 23

The thread usage message from the device reports real-time operating system (RTOS) thread usage statistics for the named thread. The reported percentage values must be normalized.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	20	string		name	Thread name (NULL terminated)
20	2	u16		cpu	Percentage cpu use for this thread. Values range from 0 - 1000 and needs to be renormalized to 100
22	4	u32	bytes	stack_free	Free stack space for this thread
	26				Total Payload Length

Table 7.7.11: MSG_THREAD_STATE 0x0017 message structure

MSG_UART_STATE — 0x001D — 29

The UART message reports data latency and throughput of the UART channels providing SBP I/O. On the default Piksi configuration, UARTs A and B are used for telemetry radios, but can also be host access ports for embedded hosts, or other interfaces in future. The reported percentage values must be normalized. Observations latency and period can be used to assess the health of the differential corrections link. Latency provides the timeliness of received base observations while the period indicates their likelihood of transmission.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	float	kB/s	uart_a.tx_throughput	UART transmit throughput
4	4	float	kB/s	uart_a.rx_throughput	UART receive throughput
8	2	u16		uart_a.crc_error_count	UART CRC error count
10	2	u16		uart_a.io_error_count	UART IO error count
12	1	u8		uart_a.tx_buffer_level	UART transmit buffer percentage utilization (ranges from 0 to 255)
13	1	u8		uart_a.rx_buffer_level	UART receive buffer percentage utilization (ranges from 0 to 255)
14	4	float	kB/s	uart_b.tx_throughput	UART transmit throughput
18	4	float	kB/s	uart_b.rx_throughput	UART receive throughput
22	2	u16		uart_b.crc_error_count	UART CRC error count
24	2	u16		uart_b.io_error_count	UART IO error count
26	1	u8		uart_b.tx_buffer_level	UART transmit buffer percentage utilization (ranges from 0 to 255)
27	1	u8		uart_b.rx_buffer_level	UART receive buffer percentage utilization (ranges from 0 to 255)
28	4	float	kB/s	uart_ftdi.tx_throughput	UART transmit throughput
32	4	float	kB/s	uart_ftdi.rx_throughput	UART receive throughput
36	2	u16		uart_ftdi.crc_error_count	UART CRC error count
38	2	u16		uart_ftdi.io_error_count	UART IO error count
40	1	u8		uart_ftdi.tx_buffer_level	UART transmit buffer percentage utilization (ranges from 0 to 255)
41	1	u8		uart_ftdi.rx_buffer_level	UART receive buffer percentage utilization (ranges from 0 to 255)
42	4	s32	ms	latency.avg	Average latency
46	4	s32	ms	latency.lmin	Minimum latency
50	4	s32	ms	latency.lmax	Maximum latency
54	4	s32	ms	latency.current	Smoothed estimate of the current latency
58	4	s32	ms	obs_period.avg	Average period
62	4	s32	ms	obs_period.pmin	Minimum period
66	4	s32	ms	obs_period.pmax	Maximum period
70	4	s32	ms	obs_period.current	Smoothed estimate of the current period
74					Total Payload Length

Table 7.7.12: MSG_UART_STATE 0x001D message structure

MSG_UART_STATE_DEPA — 0x0018 — 24

Deprecated

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	float	kB/s	uart.a.tx.throughput	UART transmit throughput
4	4	float	kB/s	uart.a.rx.throughput	UART receive throughput
8	2	u16		uart.a.crc.error.count	UART CRC error count
10	2	u16		uart.a.io.error.count	UART IO error count
12	1	u8		uart.a.tx.buffer.level	UART transmit buffer percentage utilization (ranges from 0 to 255)
13	1	u8		uart.a.rx.buffer.level	UART receive buffer percentage utilization (ranges from 0 to 255)
14	4	float	kB/s	uart.b.tx.throughput	UART transmit throughput
18	4	float	kB/s	uart.b.rx.throughput	UART receive throughput
22	2	u16		uart.b.crc.error.count	UART CRC error count
24	2	u16		uart.b.io.error.count	UART IO error count
26	1	u8		uart.b.tx.buffer.level	UART transmit buffer percentage utilization (ranges from 0 to 255)
27	1	u8		uart.b.rx.buffer.level	UART receive buffer percentage utilization (ranges from 0 to 255)
28	4	float	kB/s	uart.ftdi.tx.throughput	UART transmit throughput
32	4	float	kB/s	uart.ftdi.rx.throughput	UART receive throughput
36	2	u16		uart.ftdi.crc.error.count	UART CRC error count
38	2	u16		uart.ftdi.io.error.count	UART IO error count
40	1	u8		uart.ftdi.tx.buffer.level	UART transmit buffer percentage utilization (ranges from 0 to 255)
41	1	u8		uart.ftdi.rx.buffer.level	UART receive buffer percentage utilization (ranges from 0 to 255)
42	4	s32	ms	latency.avg	Average latency
46	4	s32	ms	latency.lmin	Minimum latency
50	4	s32	ms	latency.lmax	Maximum latency
54	4	s32	ms	latency.current	Smoothed estimate of the current latency
58					Total Payload Length

Table 7.7.13: MSG_UART_STATE_DEPA 0x0018 message structure

MSG_IAR_STATE — 0x0019 — 25

This message reports the state of the Integer Ambiguity Resolution (IAR) process, which resolves unknown integer ambiguities from double-differenced carrier-phase measurements from satellite observations.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32		num_hyps	Number of integer ambiguity hypotheses remaining
	4				Total Payload Length


Table 7.7.14: MSG_IAR_STATE 0x0019 message structure

MSG_MASK_SATELLITE — 0x002B — 43

This message allows setting a mask to prevent a particular satellite from being used in various Piksi subsystems.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8		mask	Mask of systems that should ignore this satellite.
1	1	u8		sid.sat	Constellation-specific satellite identifier
2	1	u8		sid.code	Signal constellation, band and code
				3	Total Payload Length

Table 7.7.15: MSG_MASK_SATELLITE 0x002B message structure

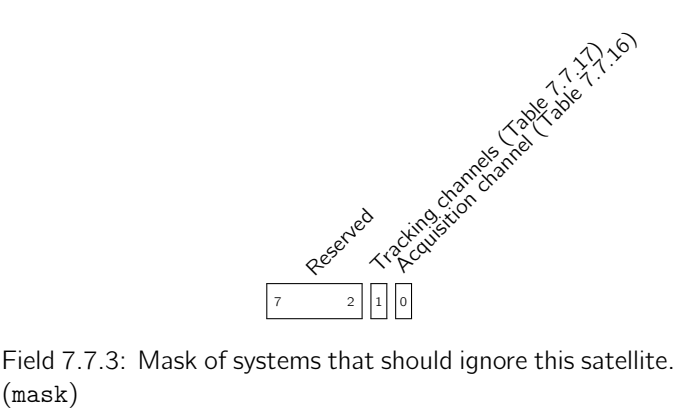

Value	Description
0	Enabled
1	Skip this satellite on future acquisitions


Table 7.7.16: Acquisition channel values (mask[0])

Value	Description
0	Enabled
1	Drop this PRN if currently tracking

Table 7.7.17: Tracking channels values (mask[1])

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P

Table 7.7.18: values (sid.code[0:7])

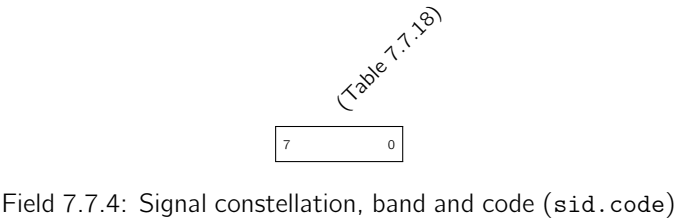

MSG_DEVICE_MONITOR — 0x00B5 — 181

This message contains temperature and voltage level measurements from the processor's monitoring system and the RF frontend die temperature if available.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	2	s16	V / 1000	dev_vin	Device V _{in}
2	2	s16	V / 1000	cpu_vint	Processor V _{int}
4	2	s16	V / 1000	cpu_vaux	Processor V _{aux}
6	2	s16	degrees C / 100	cpu_temperature	Processor temperature
8	2	s16	degrees C / 100	fe_temperature	Frontend temperature (if available)
10					Total Payload Length

Table 7.7.19: MSG_DEVICE_MONITOR 0x00B5 message structure

MSG_COMMAND_REQ — 0x00B8 — 184

Request the recipient to execute an command. Output will be sent in MSG_LOG messages, and the exit code will be returned with MSG_COMMAND_RESP.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32		sequence	Sequence number
4	N	string		command	Command line to execute
	$N + 4$				Total Payload Length

Table 7.7.20: MSG_COMMAND_REQ 0x00B8 message structure

MSG_COMMAND_RESP — 0x00B9 — 185

The response to MSG_COMMAND_REQ with the return code of the command. A return code of zero indicates success.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32		sequence	Sequence number
4	4	s32		code	Exit code
	8				Total Payload Length

Table 7.7.21: MSG_COMMAND_RESP 0x00B9 message structure

MSG_COMMAND_OUTPUT — 0x00BC — 188

Returns the standard output and standard error of the command requested by MSG_COMMAND_REQ. The sequence number can be used to filter for filtering the correct command.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32		<code>sequence</code>	Sequence number
4	N	string		<code>line</code>	Line of standard output or standard error
	$N + 4$				Total Payload Length

Table 7.7.22: MSG_COMMAND_OUTPUT 0x00BC message structure

MSG_NETWORK_STATE_REQ — 0x00BA — 186

Request state of Piksi network interfaces. Output will be sent in MSG_NETWORK_STATE_RESP messages

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
	0				Total Payload Length

Table 7.7.23: MSG_NETWORK_STATE_REQ 0x00BA message structure

MSG_NETWORK_STATE_RESP — 0x00BB — 187

The state of a network interface on the Piksi. Data is made to reflect output of ifaddrs struct returned by getifaddrs in c.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u8[4]		ipv4_address	IPv4 address (all zero when unavailable)
4	1	u8		ipv4_mask_size	IPv4 netmask CIDR notation
5	16	u8[16]		ipv6_address	IPv6 address (all zero when unavailable)
21	1	u8		ipv6_mask_size	IPv6 netmask CIDR notation
22	4	u32		rx_bytes	Number of Rx bytes
26	4	u32		tx_bytes	Number of Tx bytes
30	16	string		interface_name	Interface Name
46	4	u32		flags	Interface flags from SIOCGIFFLAGS
50					Total Payload Length

Table 7.7.24: MSG_NETWORK_STATE_RESP 0x00BB message structure

MSG_SPECAN — 0x0051 — 81

Spectrum analyzer packet.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	2	u16		channel_tag	Channel ID
2	4	u32	ms	t.tow	Milliseconds since start of GPS week
6	4	s32	ns	t.ns_residual	Nanosecond residual of millisecond-rounded TOW (ranges from -500000 to 500000)
10	2	u16	week	t.wn	GPS week number
12	4	float	MHz	freq_ref	Reference frequency of this packet
16	4	float	MHz	freq_step	Frequency step of points in this packet
20	4	float	dB	amplitude_ref	Reference amplitude of this packet
24	4	float	dB	amplitude_unit	Amplitude unit value of points in this packet
28	N	u8[N]		amplitude_value	Amplitude values (in the above units) of points in this packet
$N + 28$					Total Payload Length

Table 7.7.25: MSG_SPECAN 0x0051 message structure

7.8 Tracking

Satellite code and carrier-phase tracking messages from the device.


MSG_TRACKING_STATE — 0x0041 — 65

The tracking message returns a variable-length array of tracking channel states. It reports status and carrier-to-noise density measurements for all tracked satellites.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
$4N + 0$	1	u8		<code>states[N].sid.sat</code>	Constellation-specific satellite identifier
$4N + 1$	1	u8		<code>states[N].sid.code</code>	Signal constellation, band and code
$4N + 2$	1	u8		<code>states[N].fcn</code>	Frequency channel number (GLONASS only)
$4N + 3$	1	u8	dB Hz / 4	<code>states[N].cn0</code>	Carrier-to-Noise density. Zero implies invalid <code>cn0</code> .
$4N$					Total Payload Length

Table 7.8.1: MSG_TRACKING_STATE 0x0041 message structure

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P



Field 7.8.1: Signal constellation, band and code (`sid.code`)

Table 7.8.2: values (`sid.code[0:7]`)

MSG_TRACKING_IQ — 0x002C — 44

When enabled, a tracking channel can output the correlations at each update interval.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	1	u8		channel	Tracking channel of origin
1	1	u8		sid.sat	Constellation-specific satellite identifier
2	1	u8		sid.code	Signal constellation, band and code
8N + 3	4	s32		corrs[N].I	In-phase correlation
8N + 7	4	s32		corrs[N].Q	Quadrature correlation
8N + 3					Total Payload Length

Table 7.8.3: MSG_TRACKING_IQ 0x002C message structure

(Table 7.8.4)

7

0

Field 7.8.2: Signal constellation, band and code (sid.code)

Value	Description
0	GPS L1CA
1	GPS L2CM
2	SBAS L1CA
3	GLO L1CA
4	GLO L2CA
5	GPS L1P
6	GPS L2P

Table 7.8.4: values (sid.code[0:7])

7.9 User

Messages reserved for use by the user.

MSG_USER_DATA — 0x0800 — 2048

This message can contain any application specific user data up to a maximum length of 255 bytes per message.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	N	u8[N]		<code>contents</code>	User data payload
	N				Total Payload Length

Table 7.9.1: MSG_USER_DATA 0x0800 message structure

7.10 Vehicle

Messages from a vehicle.

MSG_ODOMETRY — 0x0903 — 2307

Message representing the x component of vehicle velocity in the user frame at the odometry reference point(s) specified by the user. The offset for the odometry reference point and the definition and origin of the user frame are defined through the device settings interface. There are 4 possible user-defined sources of this message which are labeled arbitrarily source 0 through 3.

Offset (bytes)	Size (bytes)	Format	Units	Name	Description
0	4	u32	ms	<code>tow</code>	Time field representing either milliseconds in the GPS Week or local CPU time from the producing system in milliseconds. See the <code>tow_source</code> flag for the exact source of this timestamp.
4	4	s32	mm/s	<code>velocity</code>	The signed forward component of vehicle velocity.
8	1	u8		<code>flags</code>	Status flags
	9				Total Payload Length


Table 7.10.1: MSG_ODOMETRY 0x0903 message structure

Value	Description
0	None (invalid)
1	GPS Solution (ms in week)
2	Processor Time

Table 7.10.2: Time source values (`flags[0:2]`)

Value	Description
0	Source 0
1	Source 1
2	Source 2
3	Source 3

Table 7.10.3: Velocity Source values (`flags[3:4]`)



Field 7.10.1: Status flags (`flags`)